


- Informed Driver.
- Stop condition (With Or Without Stop Control).
- Wet Pavement
- Reaction preceding entry point.
- Minimum braking distance for urban conditions.
- 75' min. for L₂.
- Comfortable deceleration rates for rural conditions (AASHTO 2001 threshold rate of 11.2 ft./s2).

GENERAL NOTES

- 1. The plan views shown are for turn lane taper shapes and dimensional purposes only, they do not prescribe the use of curb, curb and gutter, shoulders nor separators specifically to either rural or urban conditions.
- 2. Total deceleration distances must not be reduced except where lesser values are imposed by unrelocatable control points.
- 3. Right turn lane tapers and distances identical to left turn lanes under stop control conditions. Right turn lane tapers and/or distances are site specific under free flow or yield conditions.
- 4. These left turn configurations apply to continuous left turn lanes only

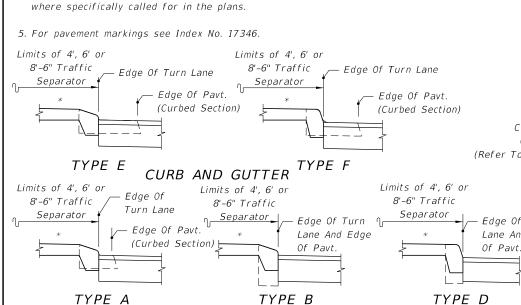

For Curb And Curb & Gutter Types, See Index No. 300 * Option I Separators Shown (Refer To Index No. 302)

CURB

Brakes Applied After Turning Vehicle Clears Through Lane; -RAISED SEPARATION Entry Speed: 10 mph Below Design Speed For Urban Condition Average Running Speed For Rural Condition DOUBLE LEFT TURNS Delineator Post (Refer To Index No. 17346) === Concrete Curb Or Curb And Gutter (Refer To Index No. 300) 2" Misc. Asphalt Pavt ♪ ♪ \prod Taper 50' — Begin Lane Line Stop Bar (If Required) -Queue Length ** ** Queue Length Is Measured From The Median Nose Radial Brakes Applied After Turning Point Or, When A Stop Bar Is Required, From The Stop Bar Vehicle Clears Through Lane; — FLUSH AND/OR CURBED SEPARATION Traffic Separator (Refer 10 mph Below Design Speed For Urban Condition To Index No. 302) Concrete Curb Or Average Running Speed For Rural Condition Curb And Gutter == (Refer To Index No. 300) ♪ ♪ \prod Taper 50' - Begin Lane Line — Edge Of Turn Lane And Edge Brakes Applied After Turning Vehicle Clears Through Lane; — RAISED SEPARATION Entry Speed: 10 mph Below Design Speed For Urban Condition Average Running Speed For Rural Condition SINGLE LEFT TURNS

> \triangle The length of taper may be increased to L_1 for single left turns and L_3 for double left turns when: a. Left turn queue vehicles are adequately provided for within the design queue length.

- b. Through vehicle queues will not block access to left turn lane.
- c. Approved by District Design Engineer

FY 2017-18

TURN LANES

INDEX SHEET NO. NO. 301 1 of 1

Stop Bar (If Required) —

Queue Length **

Delineator Post (Refer To Index No. 17346)

2" Misc. Asphalt Pavt.

Queue Length

(Measured From Stop

Bar Location)

Queue Lenath

(Measured From Stop

Bar Location)

♪

♪

♪

Concrete Curb Or Curb And Gutter

Traffic Separator (Refer

To Index No. 302)

丿

FLUSH AND/OR CURBED SEPARATION

Begin Lane Line

— Begin Lane Line

Begin Lane Line

Begin Lane Line

Taper 100'

Taper 100'

Brakes Applied After Turning

Entry Speed:

Vehicle Clears Through Lane; —

10 mph Below Design Speed For Urban Condition

Average Running Speed For Rural Condition

(Refer To Index No. 300)

MEDIAN CURB AND TRAFFIC SEPARATOR JUNCTURE DETAILS **REVISION** 07/01/05

DESCRIPTION:

FDOT DESIGN STANDARDS

Concrete Curb Or Curb And Gutter

(Refer To Index No. 300)