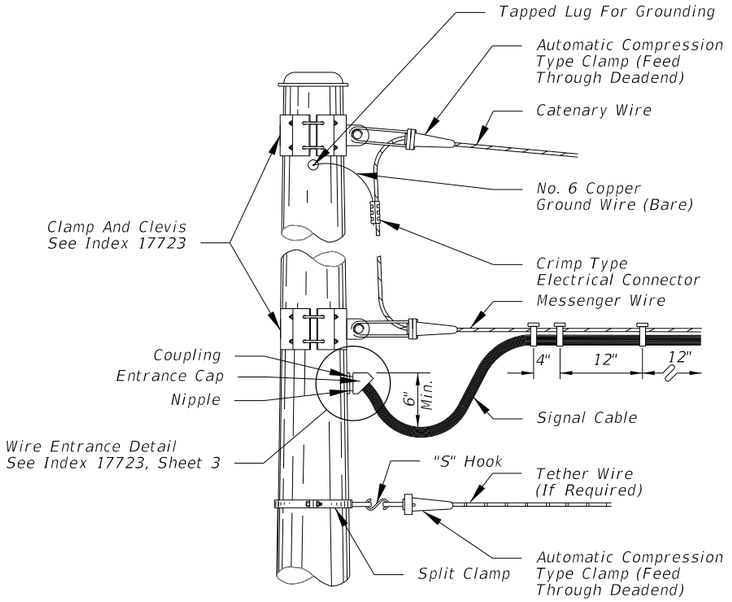

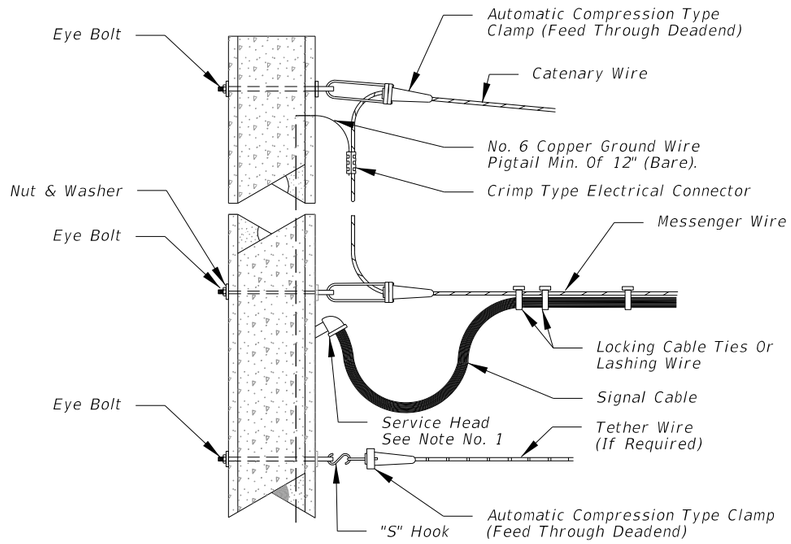

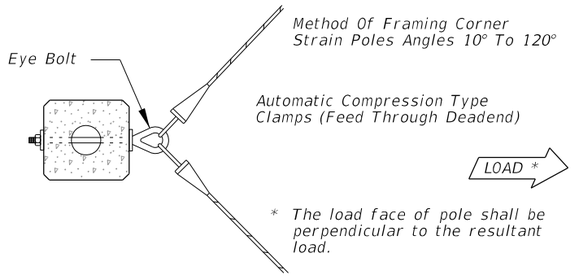

PLAN

PRESTRESSED CONCRETE POLE

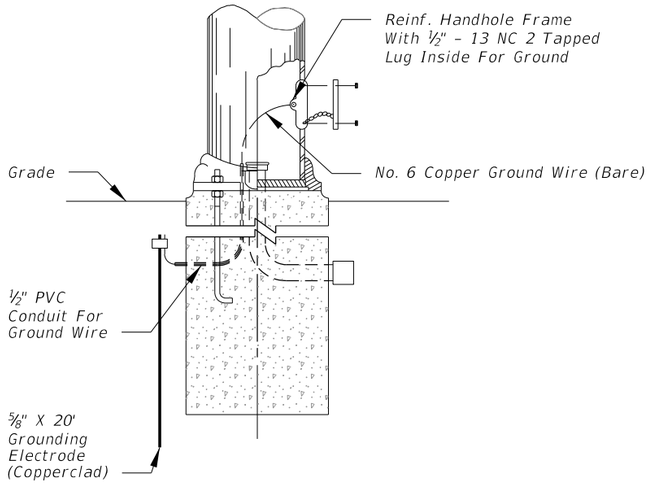

ELEVATION

STEEL POLE

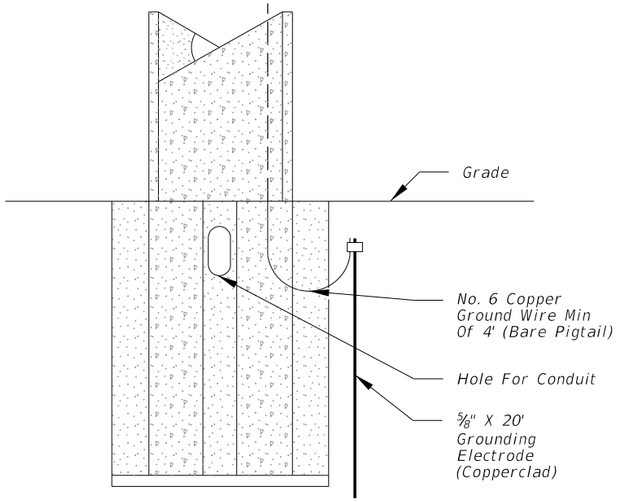

ELEVATION

PRESTRESSED CONCRETE POLE

NOTES:

1. Use only span wire mounting assemblies listed on the APL. For specific details and requirements, see the vender drawings on the APL.
2. With the approval of the resident engineer, the service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
3. Lashing wire should normally be used for distances of 12' or greater.
4. All hardware for signal attachment shall be stainless steel.
5. Hole for eye bolt will require field reaming for 1" & 1¼" eye bolts.
6. Meet all grounding requirements of Specification 620.

10/25/2016 9:57:31 AM

LAST REVISION	REVISION	DESCRIPTION:			INDEX NO.	SHEET NO.
11/01/16			FDOT FY 2017-18 DESIGN STANDARDS	SIGNAL CABLE & SPAN WIRE INSTALLATION DETAILS	17727	1 of 2

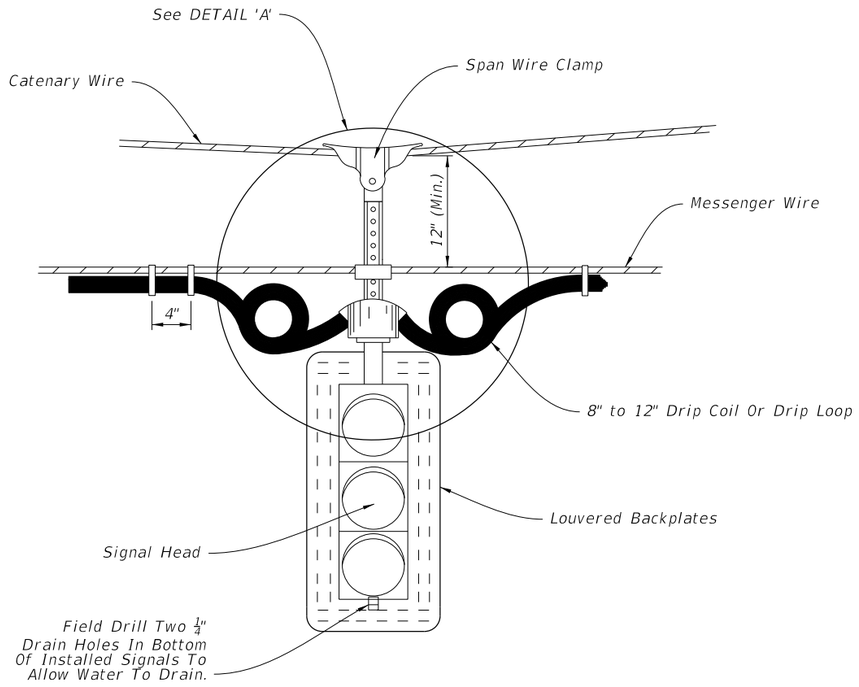

SIGNAL ATTACHMENT

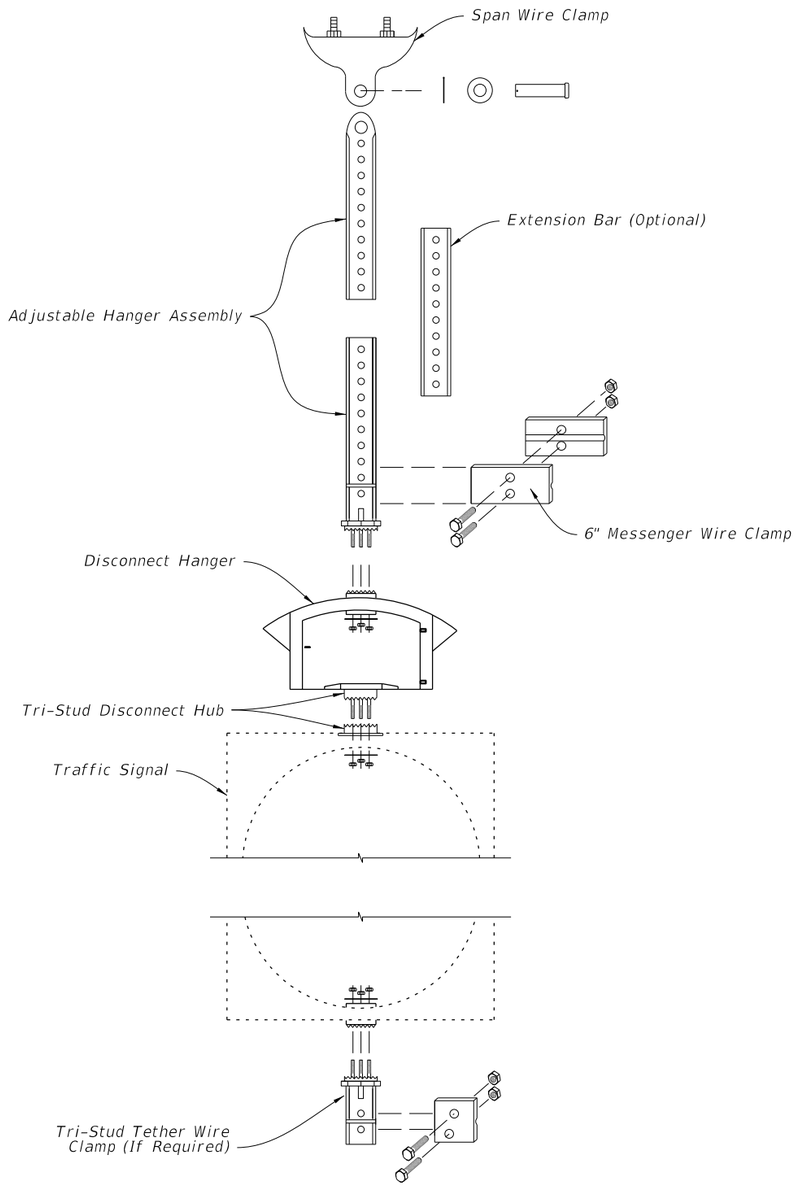

DETAIL 'A'

TWO POINT ATTACHMENT

Notes:

1. With the approval of the resident engineer, the service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
2. Use only span wire mounting assemblies listed on the APL.

10/25/2016 9:57:33 AM

LAST REVISION	REVISION	DESCRIPTION:	FDOT FY 2017-18 DESIGN STANDARDS	SIGNAL CABLE & SPAN WIRE INSTALLATION DETAILS	INDEX NO.	SHEET NO.
11/01/16					17727	2 of 2