


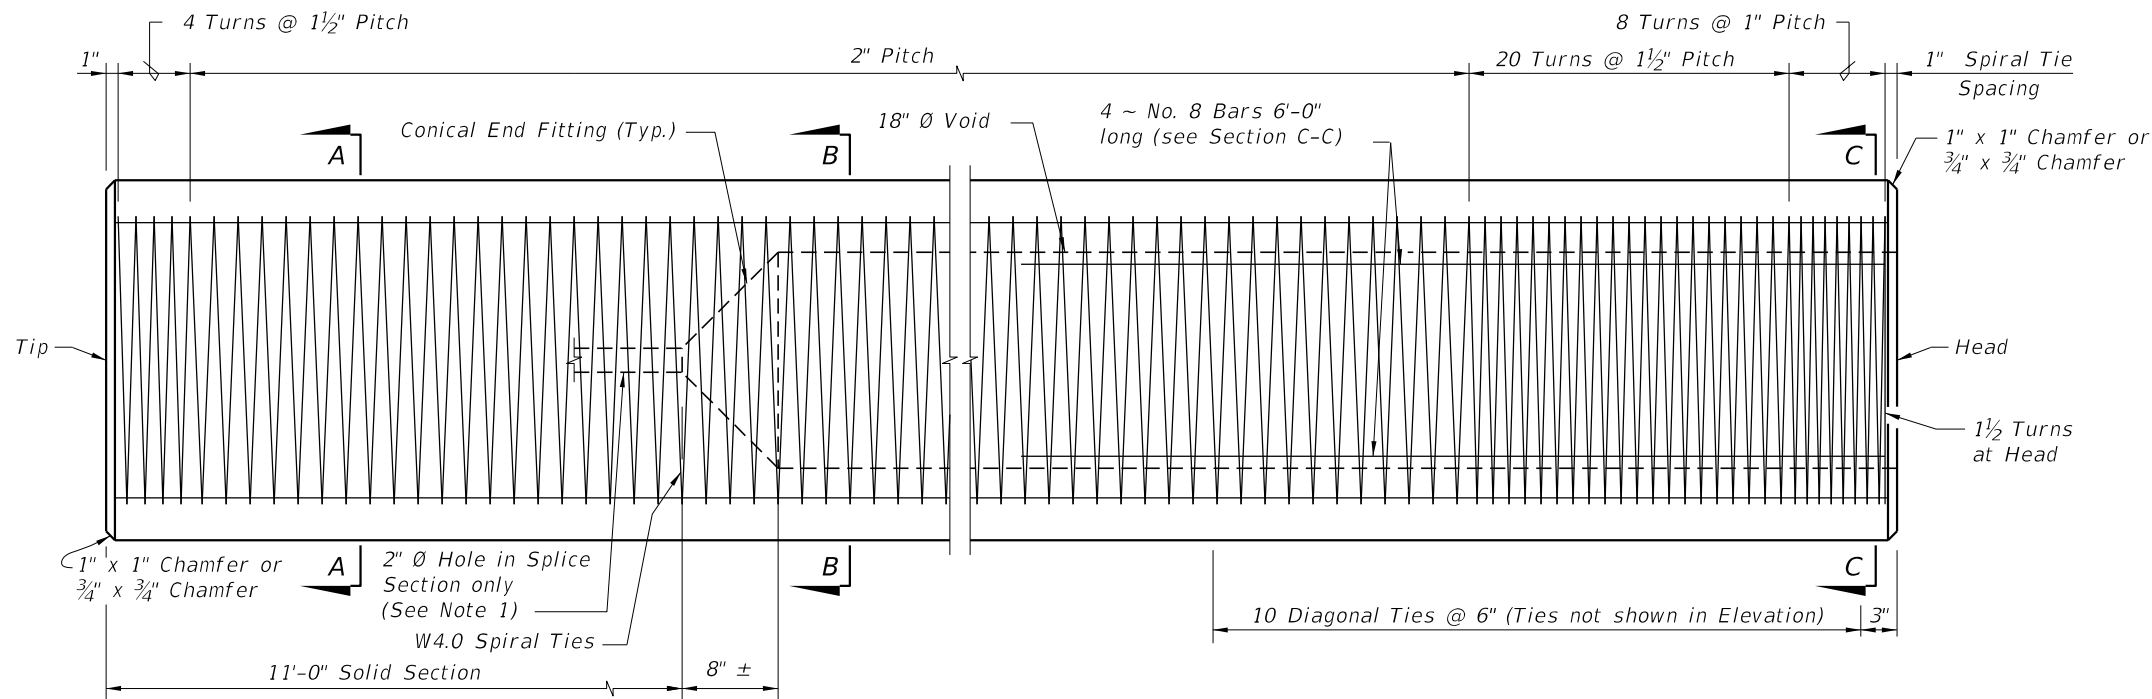


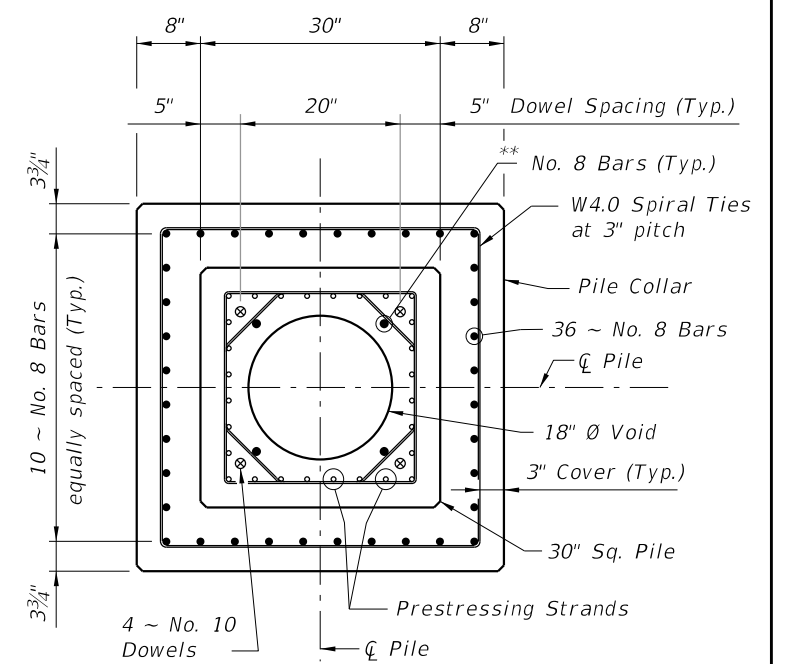


SECTION D-D
SECTION THRU PILE COLLAR

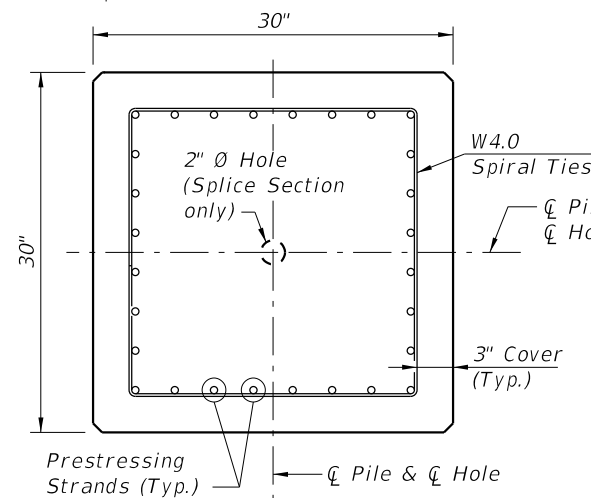

SECTION A-A

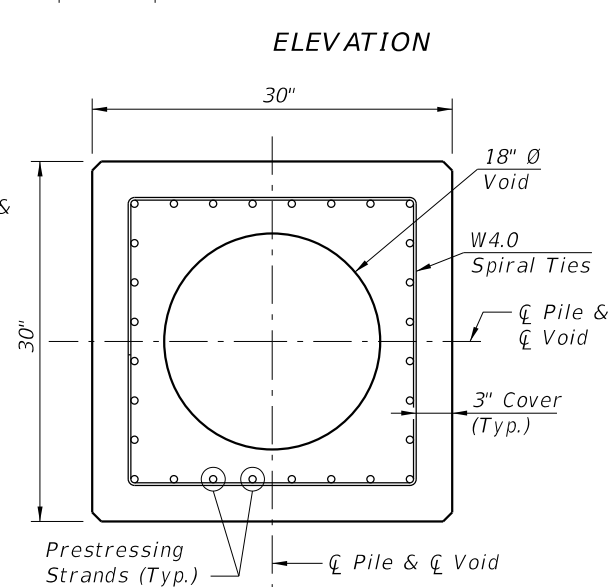


SECTION B-B

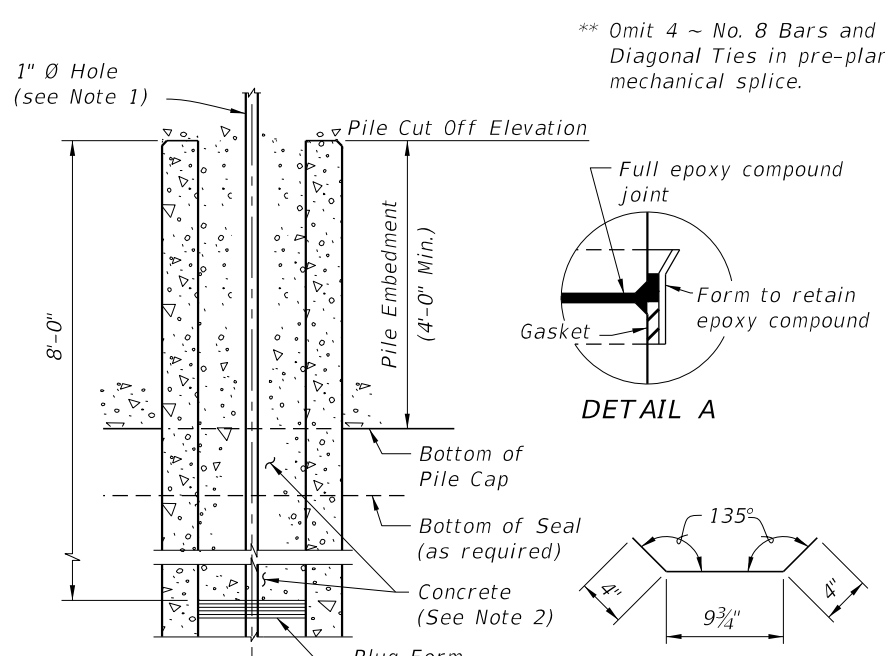


SECTION THROUGH PILE AT PILE CAP


** Omit 4 ~ No. 8 Bars and Diagonal Ties in pre-planned mechanical splice.

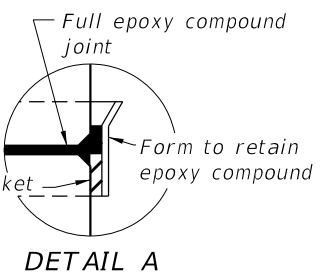

DETAIL A

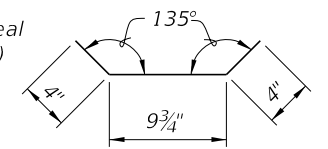


W4.0 DIAGONAL TIE
DETAIL

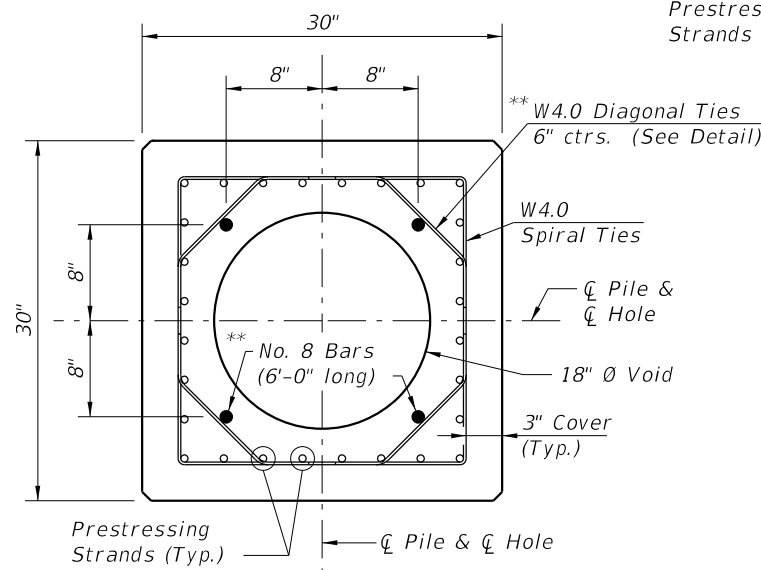

SECTION C-C

STRAND PATTERN
28 ~ 0.6" Ø, Grade 270 LRS, at 29.5 kips

- NOTES:**
- Venting shall be provided by the use of a 1" Ø PVC conduit through a substructure cap or column. Voids between segments of spliced piles shall be connected by 2" Ø hole(s).
 - After the pile is driven and cut to elevation, the top 8'-0" of the 18" Ø Void shall be filled with concrete. Prior to filling the top 8'-0" of the 18" Ø Void with concrete, strip the cardboard form material from the void. The concrete fill material shall be of the same type and strength as called for in the pile cap and paid for as substructure concrete.
 - Collar concrete shall reach a strength of 6,000 psi before pile driving is resumed.
 - Work this Index with Index 455-001 - Notes and Details for Square Prestressed Concrete Piles.

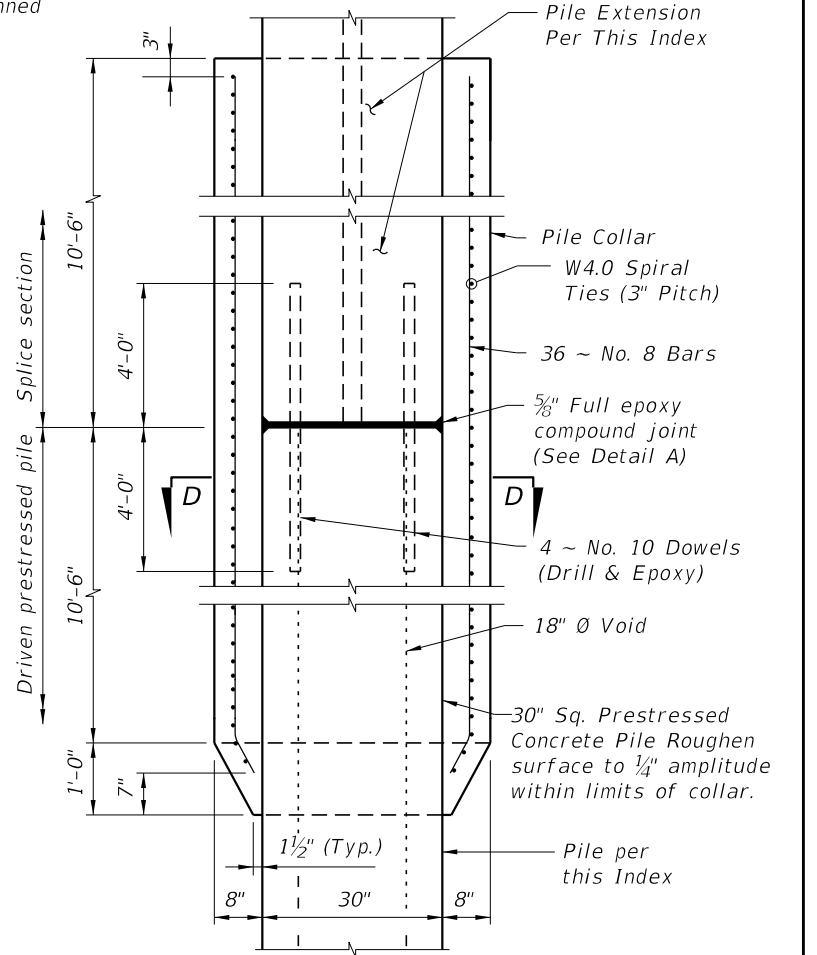

DETAIL OF PILE COLLAR FOR HIGH MOMENT
CAPACITY 30" SQUARE PRESTRESSED PILE
-PILE SPLICE DETAIL-

LAST REVISION 11/01/25	DESCRIPTION:	FDOT FY 2027-28 STANDARD PLANS	30" SQUARE PRESTRESSED CONCRETE PILE - HIGH MOMENT CAPACITY	INDEX 455-031	SHEET 1 of 1
------------------------------	--------------	--------------------------------------	--	------------------	-----------------