

1. Meet the requirements of Specification 700.

2. Work this Index in conjunction with SPAN SIGN STRUCTURE DATA TABLES in the Plans and Index 700-030.

3. Handholes at the pole base are required for DMS Structures. Refer to Index 700-090 for Handhole Details.

4. Shop Drawings are required.

Obtain Shop Drawing approval prior to fabrication. Include the following:

A. Upright Pipe height ('C' & 'B') and foundation elevations: Verify dimensions in the field prior to submittal to ensure minimum vertical clearances of the sign panel over the roadway.

B. Height of the foundation above adjacent ground.

C. Anchor bolt orientation with respect to centerline of truss and the direction of traffic.

D. Method to be used to provide the required parabolic camber (see Camber Diagram).

E. Handholes at pole base (when required).

5. Provide a parabolic camber with the required upward deflection as shown on the Camber Diagram.

6. Materials:

A. *Sign Structure:*

a. Upright and Chords (Steel Pipe): API 5L X42 PSL2, 42 ksi yield or ASTM A500, Grade B (Min.)

b. Steel Angles and Plates: ASTM A709 grade 36

B. Bolts, Nuts and Washers:

a. High Strength Bolts: ASTM F3125, Grade A325, Type 1

b. Nuts: ASTM A563, Grade DH Heavy-Hex

c. Washers: ASTM F436, Type 1, one under turned element

C. Anchor Bolts, Nuts and Washers

a. Anchor Bolts: ASTM F1554 Grade 55


b. Nuts: ASTM A563 Grade A Heavy-Hex (5 per bolt)

c. *Plate Washers: ASTM A36 (2 per bolt)*




SPAN SIGN ASSEMBLY




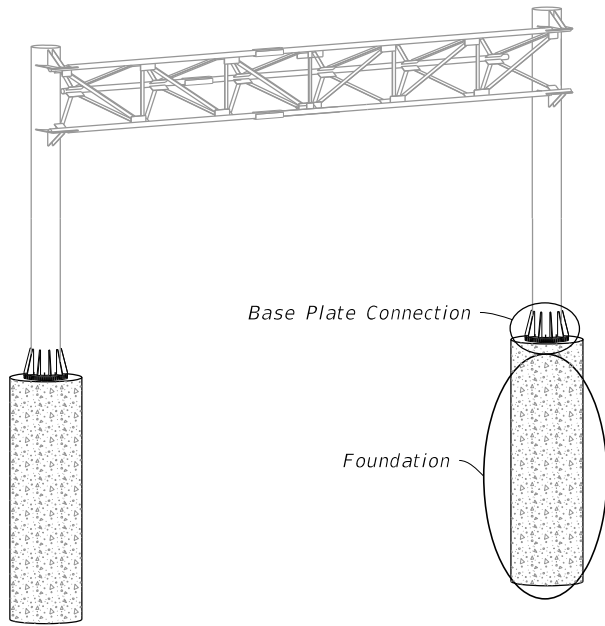

SPAN SIGN ASSEMBLY

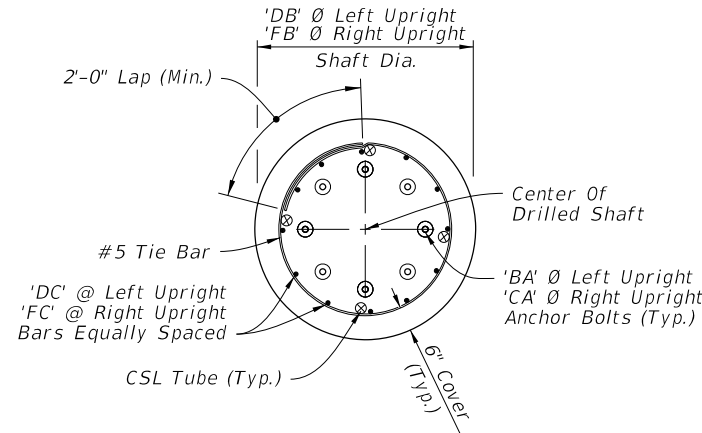


PLAN

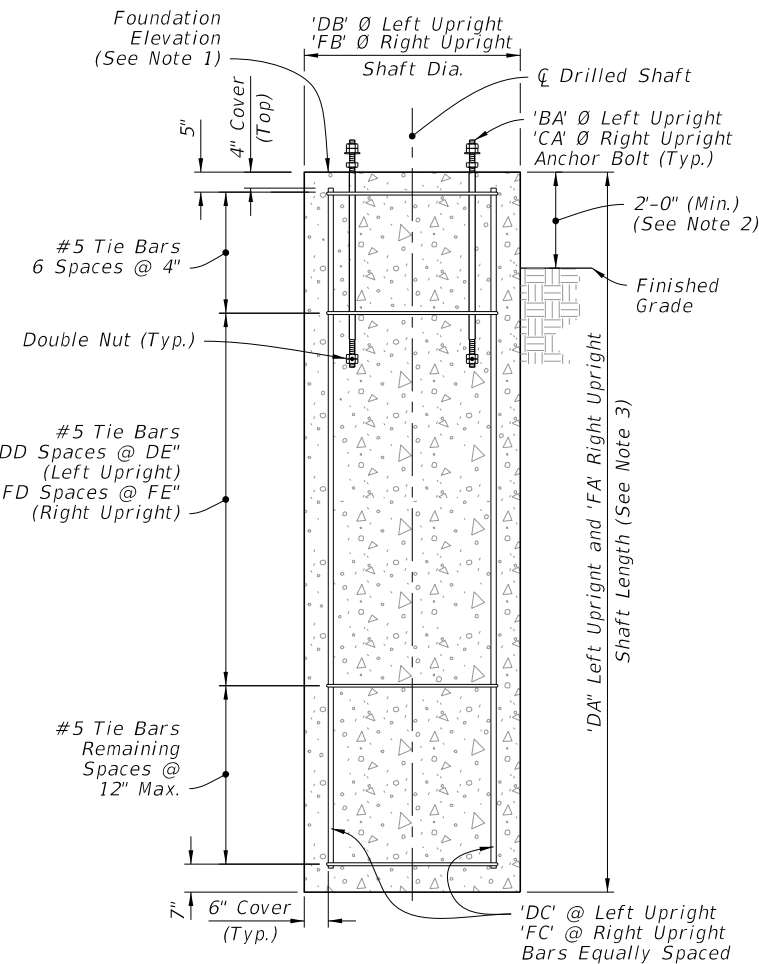


ELEVATION

DRILLED SHAFT


FOUNDATION




DETAIL "A"

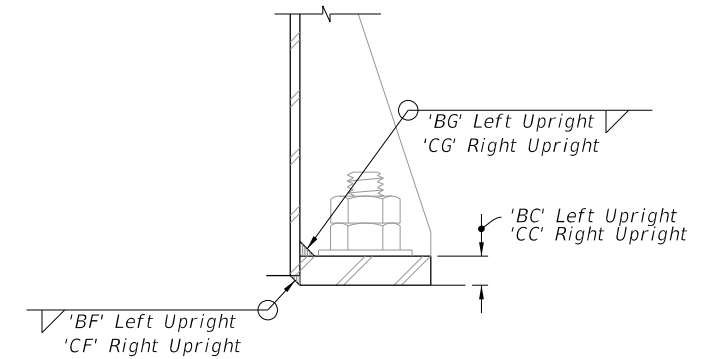

DETAIL "B"

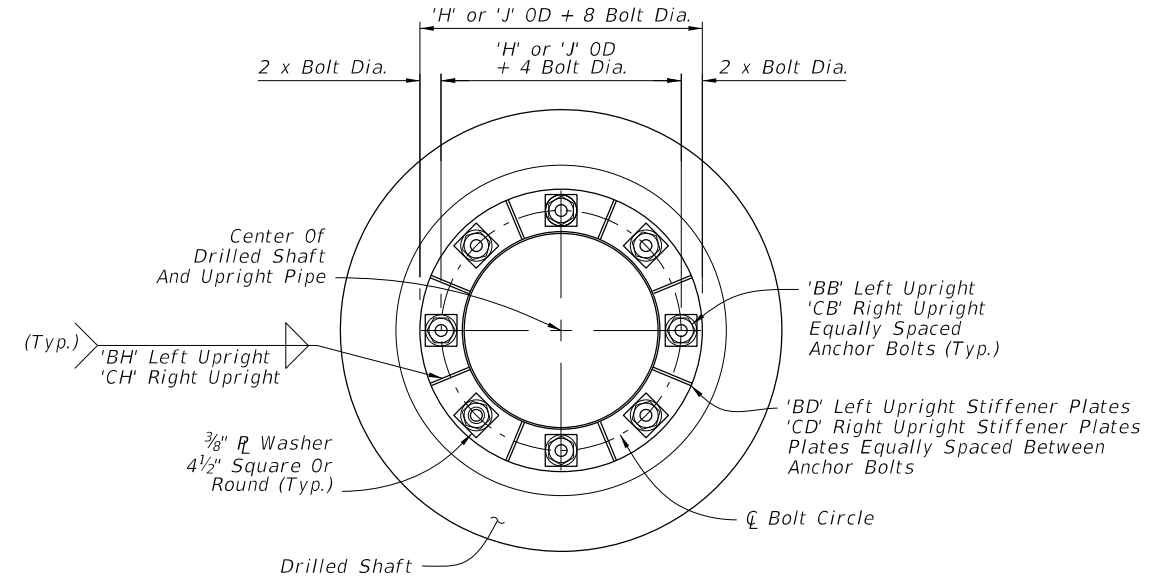

PLAN

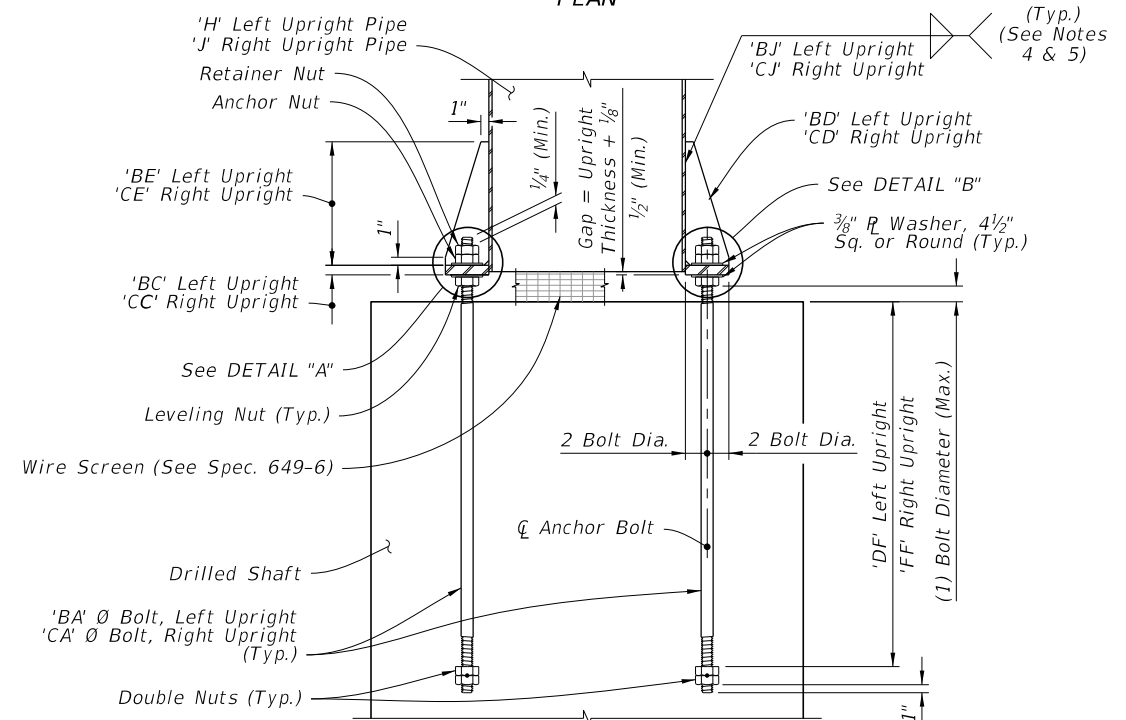


ELEVATION


BASE PLATE CONNECTION

NOTES:

1. See Traffic Plans for elevation at top of Foundation.
2. Install Drilled Shaft with a 2'-0" minimum from top elevation of the drill shaft to the finished grade, unless specified otherwise in the plans.
3. The shaft length is based on 2'-0" height above finished grade.
4. Wrap fillet weld around the stiffener termination on the tube wall (Typ).
5. After galvanizing, provide magnetic particle testing on 100% of upright fillet welds.
6. Weld plates 'BD' and 'CD' in a star pattern. A star pattern is one in which the plates on opposite and near opposite sides of the pole circle are successively welded in a pattern resembling a star. For an 8 plate circle with plates sequentially numbered 1 to 8, weld the plates in the following order: (1, 5, 7, 3, 8, 4, 6, 2).

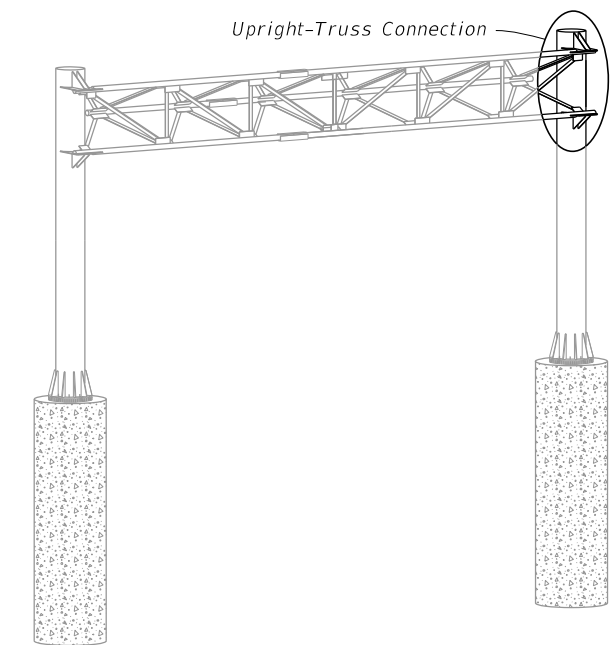


SPAN SIGN ASSEMBLY

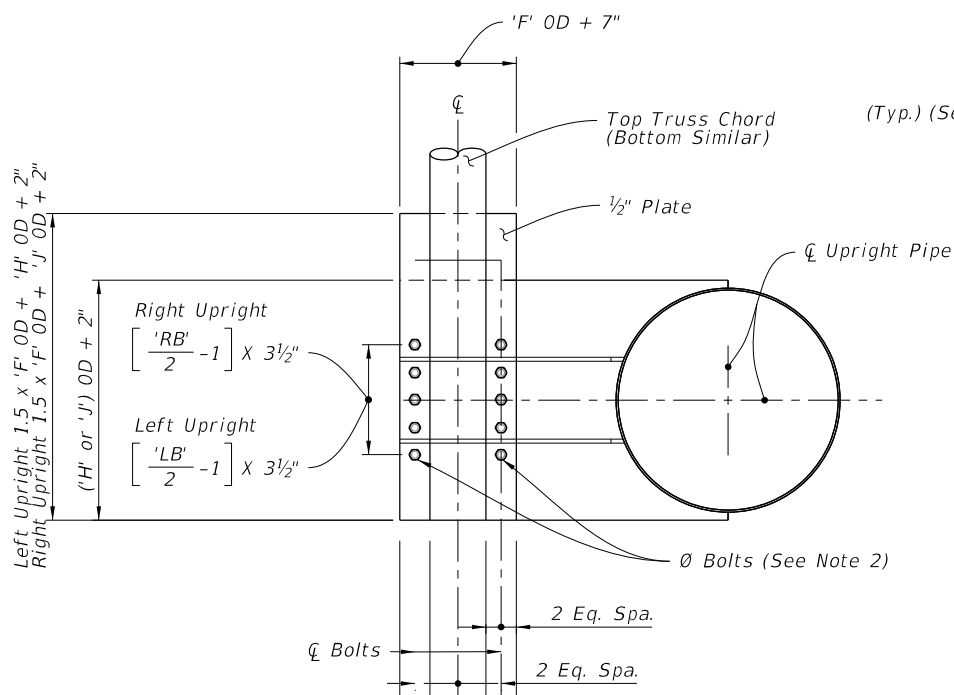


SECTION A-A


(With Gusset Plates And Web Angles Omitted For Clarity)

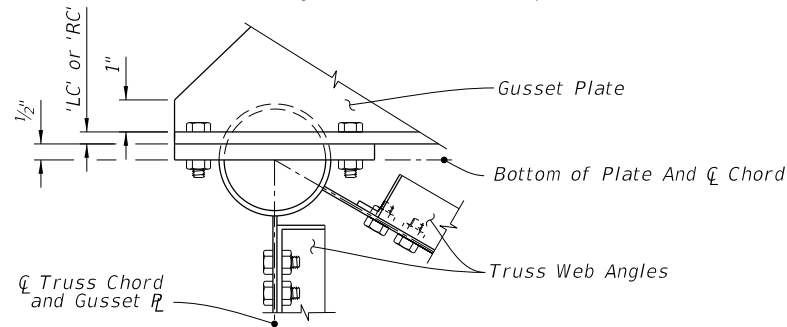

DETAIL "C"

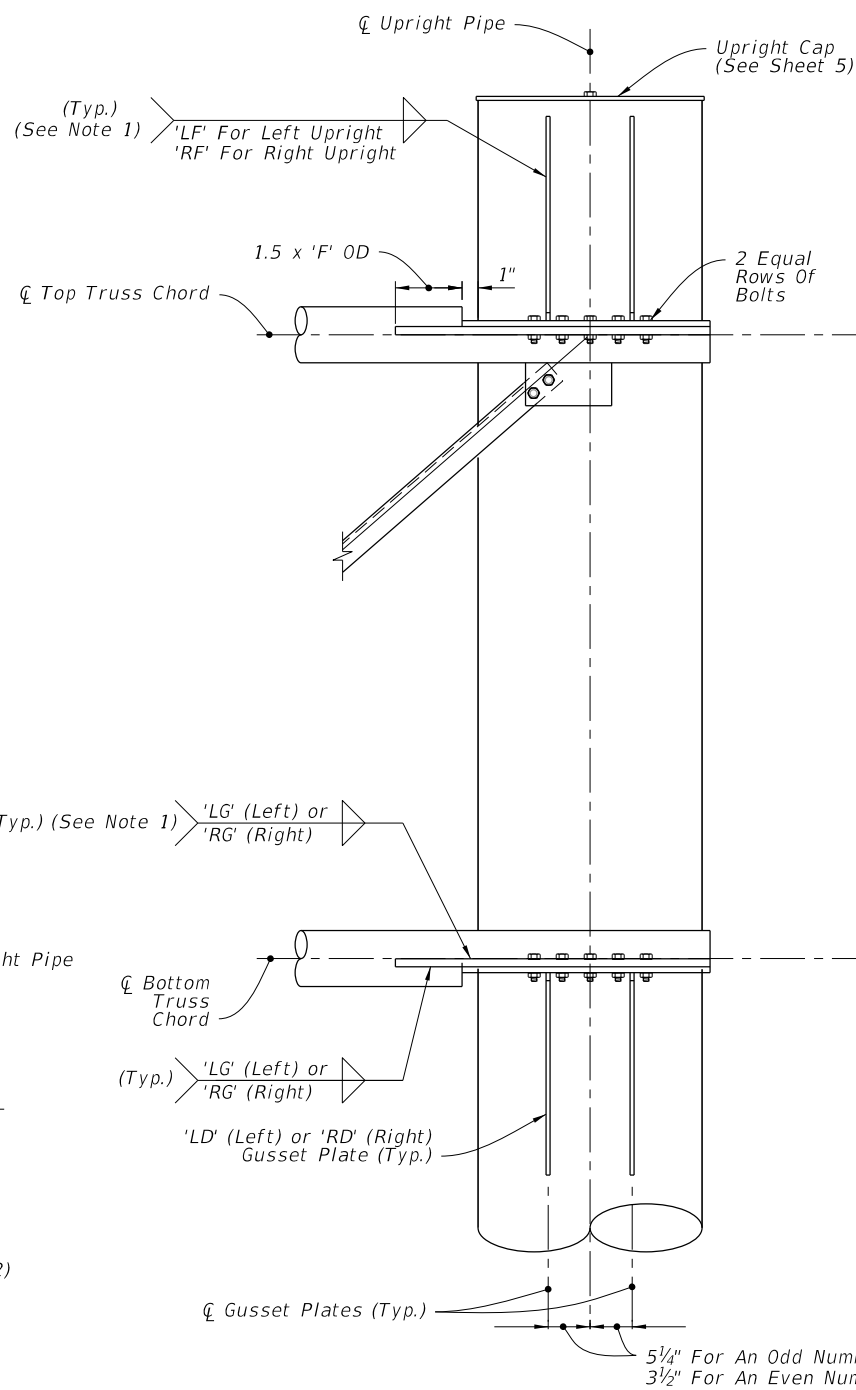

FRONT ELEVATION

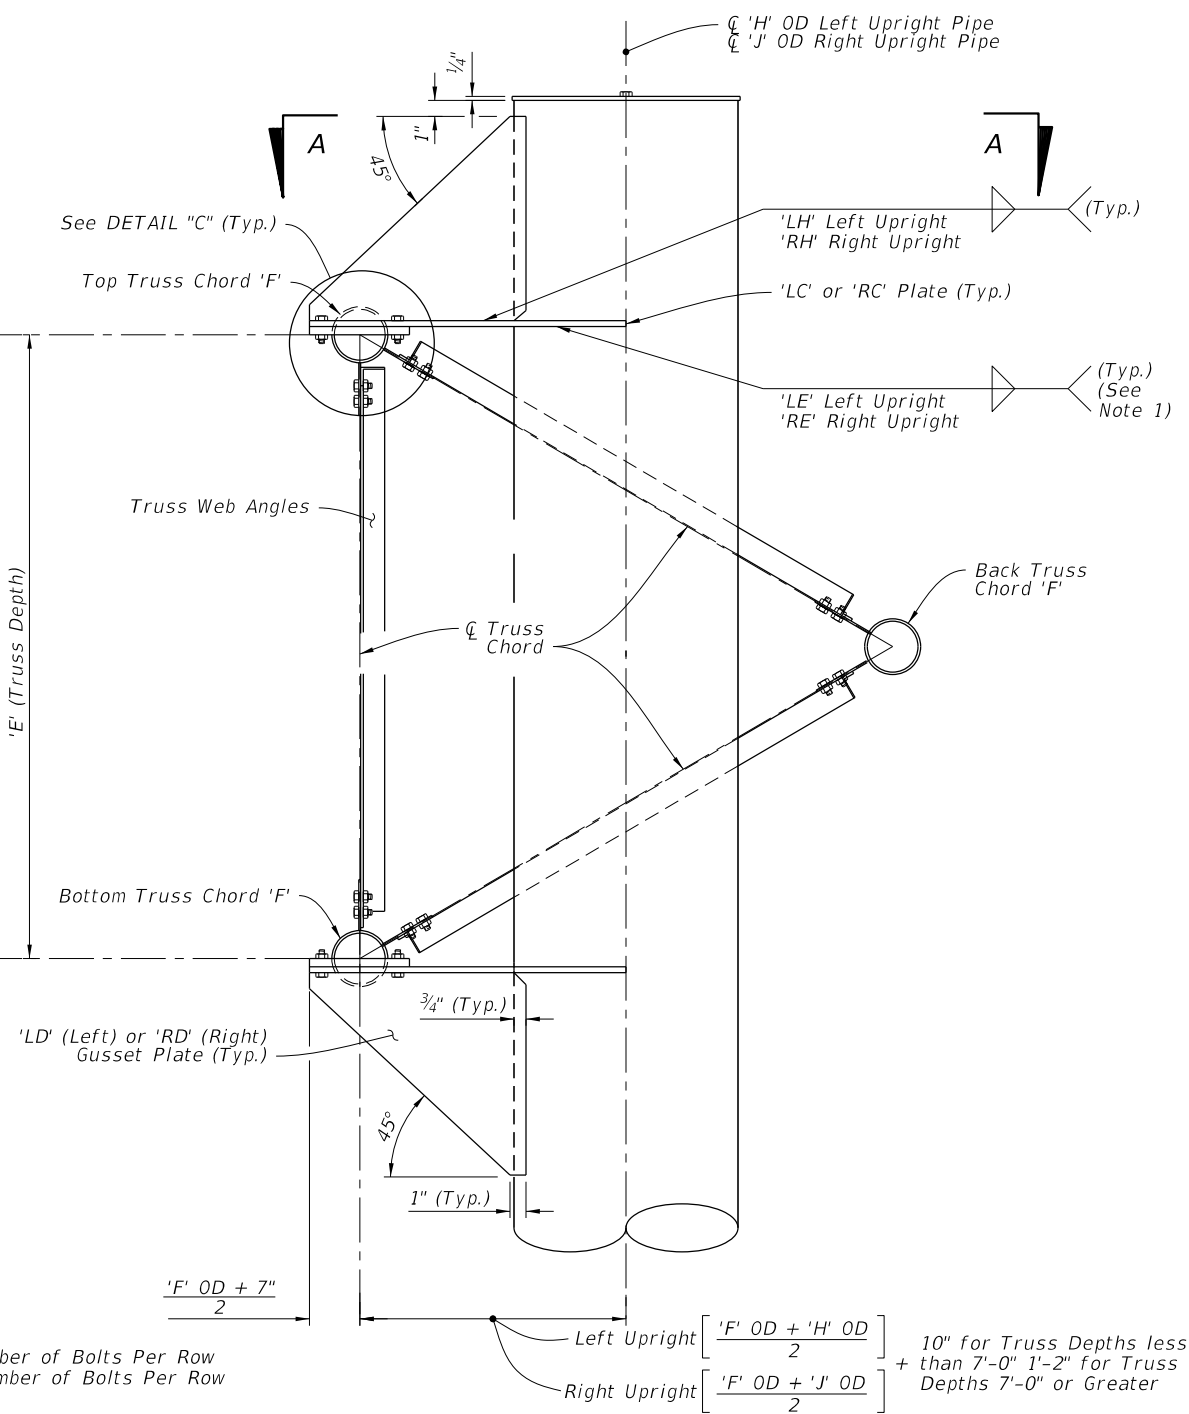

SIDE ELEVATION

UPRIGHT-TRUSS CONNECTION DETAIL


(Web Members From Back Truss Chord Omitted For Clarity, See Note 3)

NOTES:

1. Wrap fillet weld around the stiffener termination on the tube wall.
2. Truss Chord Bolts: 'LB' or 'RB' Hex Head Bolts 'LA' or 'RA' Ø.
3. Right Upright Truss connection shown, Left Upright Truss connection similar.

9/28/2026 12:12:13 PM

LAST REVISION	DESCRIPTION:	FY 2027-28 STANDARD PLANS	INDEX	SHEET
11/01/22			700-041	3 of 5

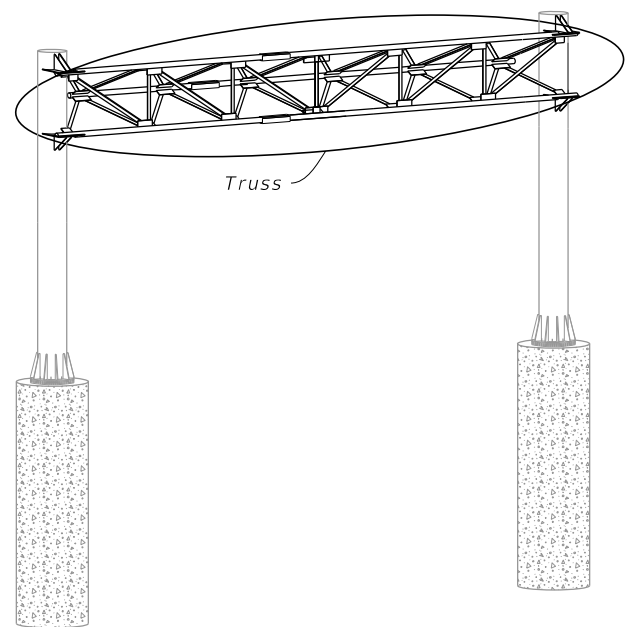


SPAN SIGN ASSEMBLY





NOTES:

1. Out-of-plane members are not shown for clarity.
2. Back truss chord and attached angles are not shown for clarity.
3. Wrap fillet weld around plate termination on the tube wall.

Bolt Diameter (in.)	Distance (in.)	
	EA	EB
1 1/4	4 3/8	2 1/4
1	3 1/2	1 3/4
7/8	3	1 1/2
3/4	2 1/2	1 1/4
5/8	2 1/4	1 1/8

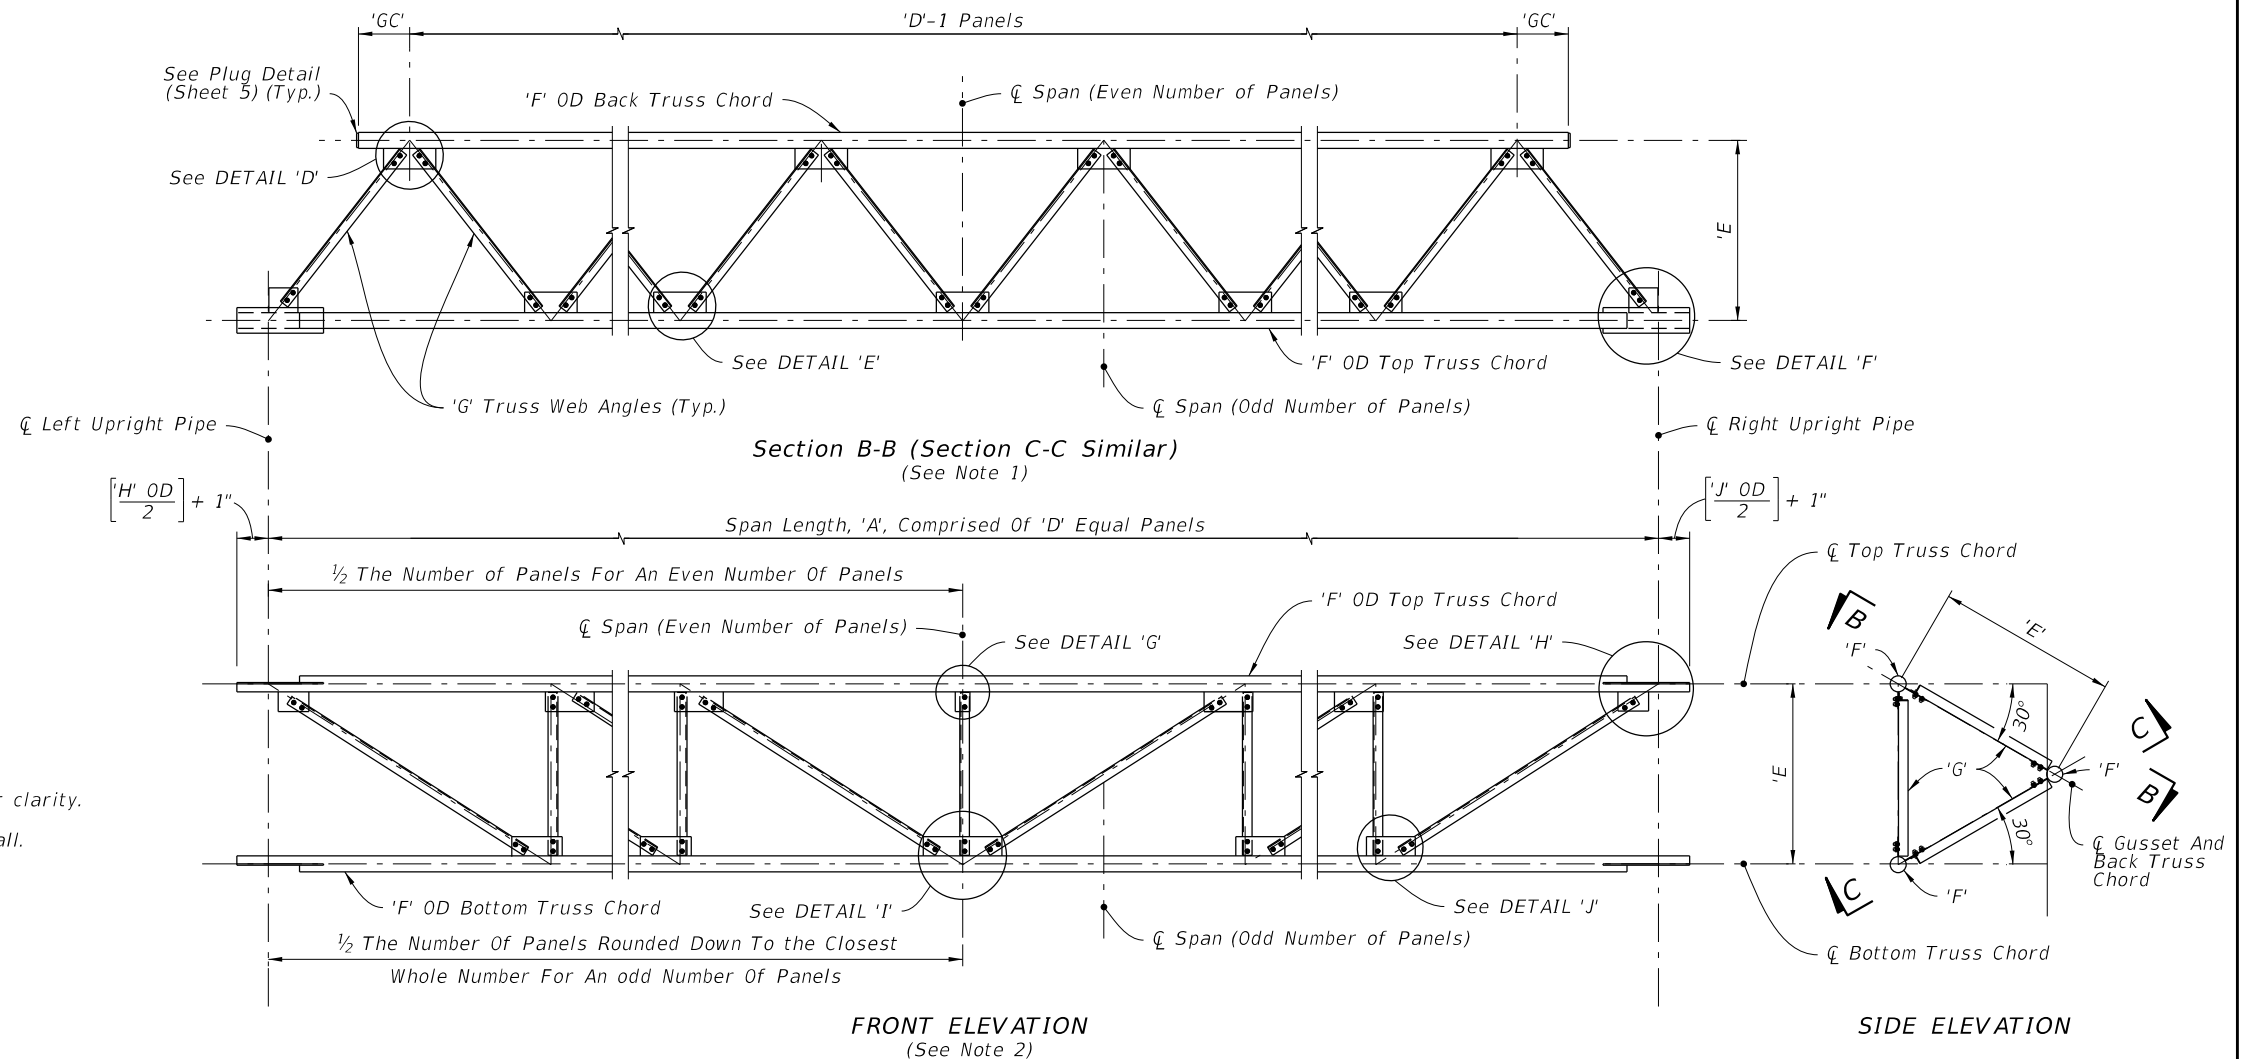

TRUSS



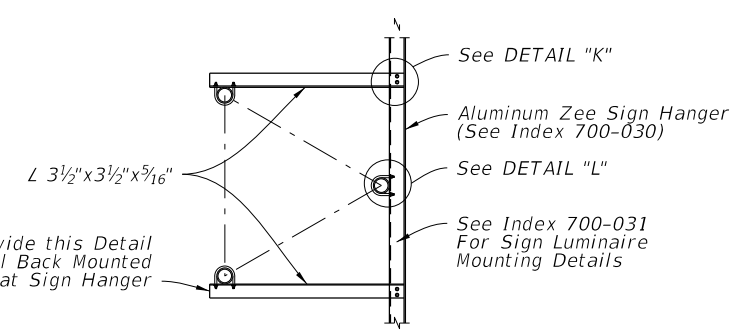
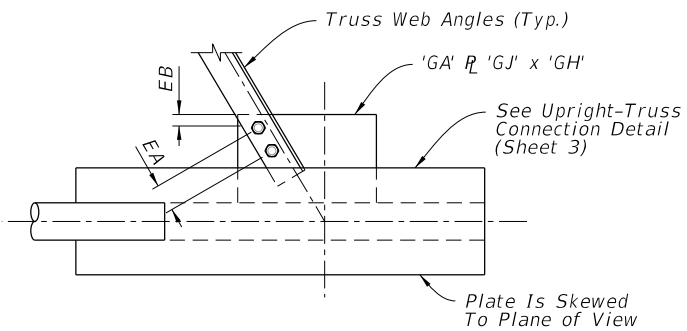
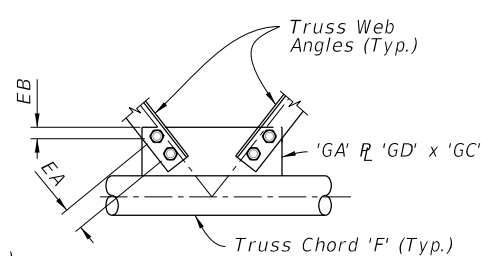
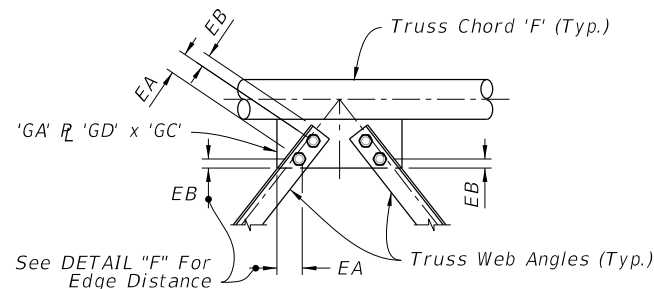


DETAIL 'D'

DETAIL 'E'

DETAIL 'F'

BACK-SIDE SIGN MOUNTING

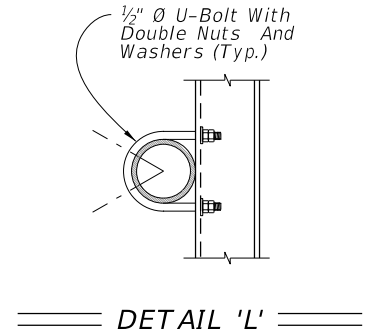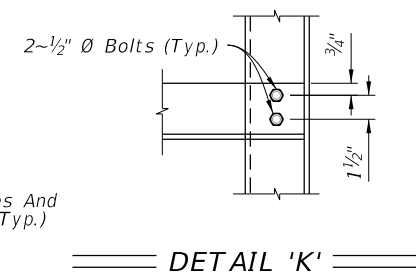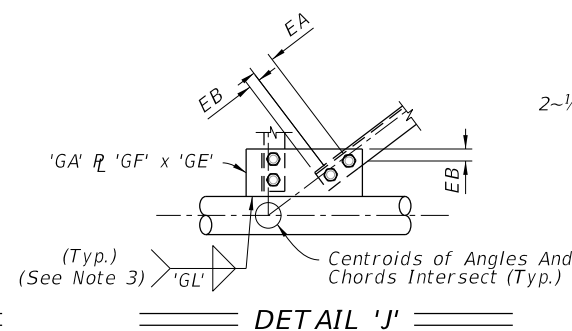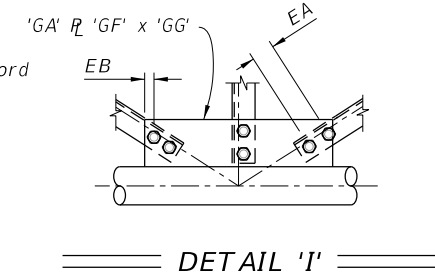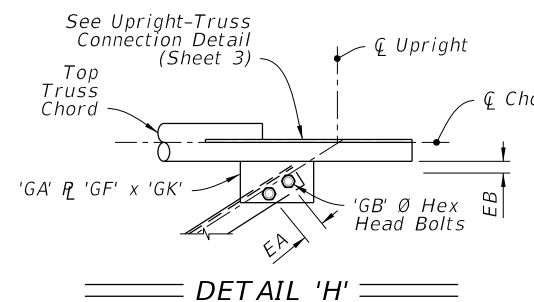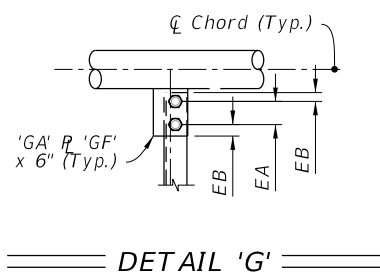


FY 2027-28
STANDARD PLANS

SPAN SIGN STRUCTURE

INDEX
700-041

SHEET
4 of 5

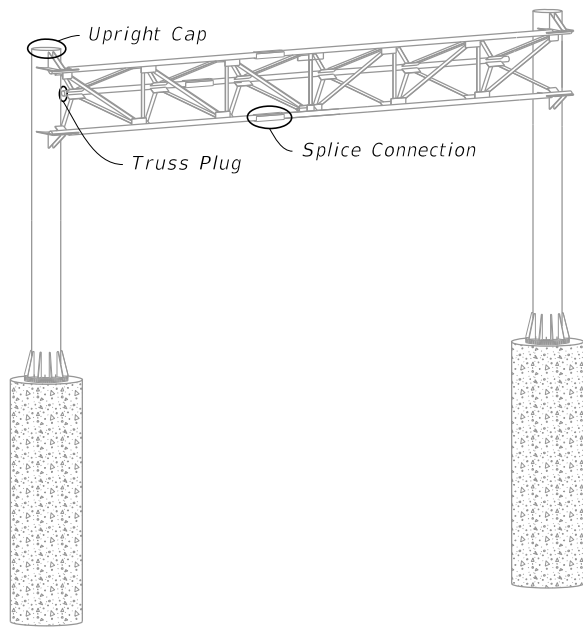


SPAN SIGN ASSEMBLY


Bolt Diameter (in.)	Distance (in.)	
	A	B
1	1 3/4	3 1/2
7/8	1 1/2	3
3/4	1 1/4	2 1/2

SPLICE CONNECTION NOTE:

- Only 6 bolts are shown in detail for clarity. (One Half Each End Of Splice)
- Chord Splices: Minimum splice spacing is three truss panel lengths apart and three truss panel lengths from the uprights when panel lengths are 10'-0" or less. Chord Splices may be either the Standard Splice or the Alternate Splice, but not both on the same structure.
- Upright splice: Not allowed unless the upright exceeds available mill lengths (35' - 40').

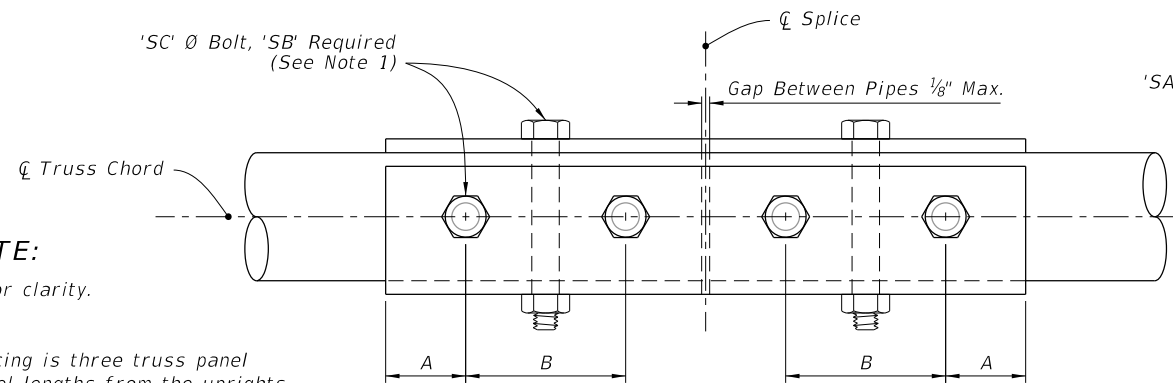


FRONT ELEVATION

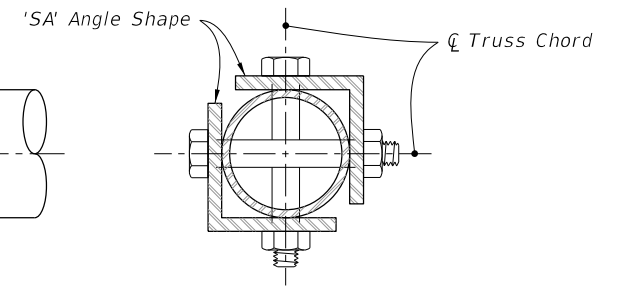


SIDE ELEVATION

SPLICE CONNECTION DETAIL

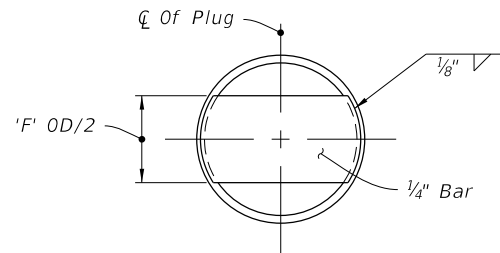


(Each End Of Back Truss Chord)

TRUSS PLUG DETAIL

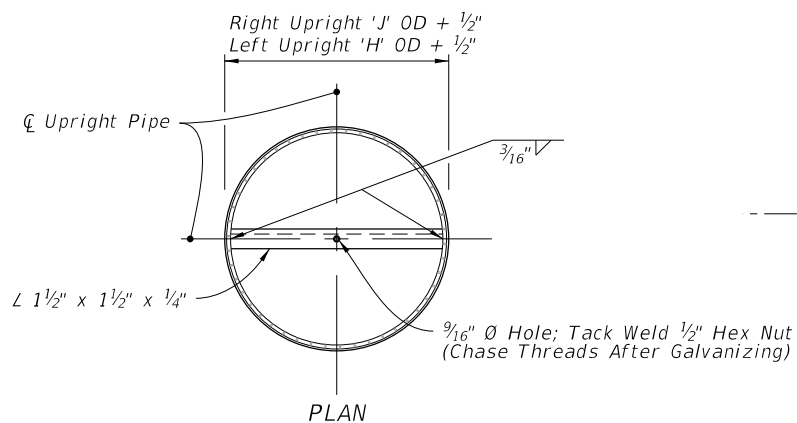


PLAN

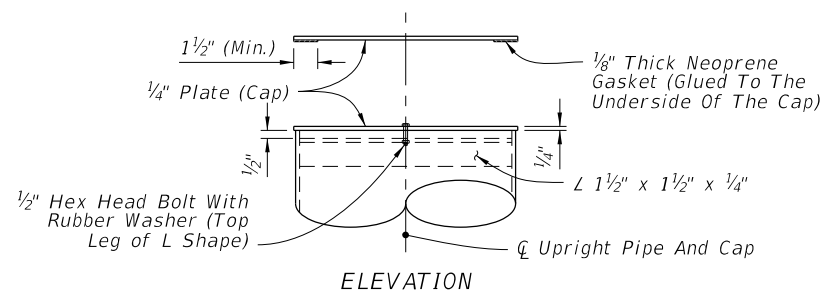


ELEVATION

UPRIGHT CAP DETAIL

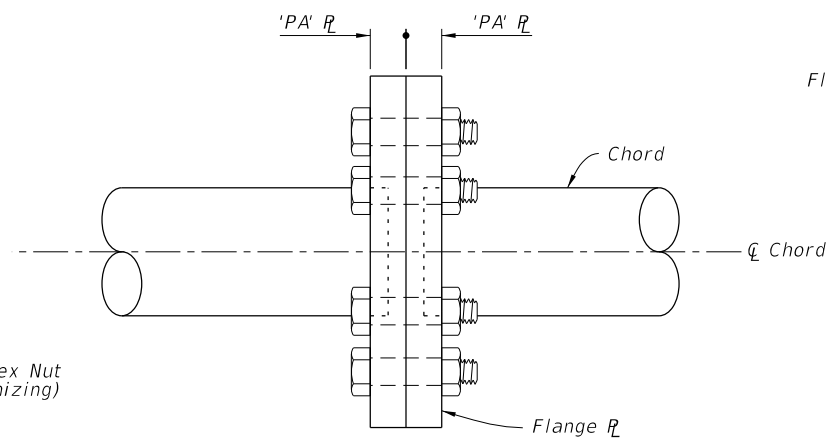


FRONT ELEVATION

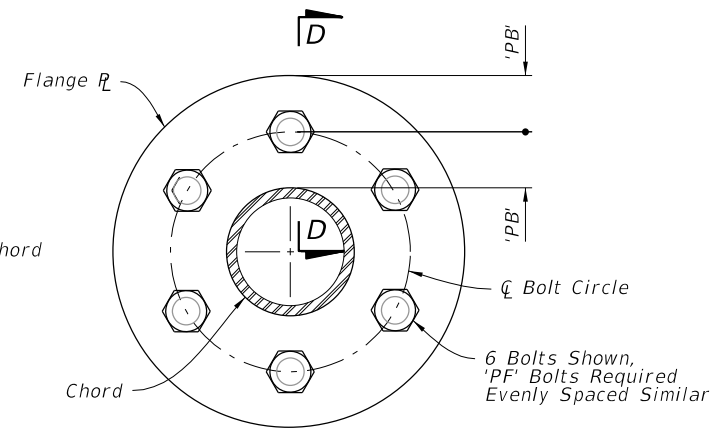

SIDE ELEVATION

ALTERNATE SPLICE CONNECTION DETAIL

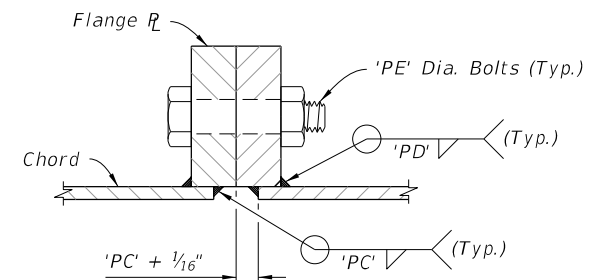

SECTION D-D