

9/28/2026 12:13:37 PM

GENERAL NOTES:

- 1. Sign dimensions are shown in width by height (W x H) throughout the Index.
- 2. See APPENDIX for previous sign numbering crosswalk.
- 3. Center text within the sign horizontally unless otherwise noted.

NUMBERING CONVENTION:

FTP-AAA B/C-DD or TTC-AAA B/C-DD

- AAA = Sign Type
- B = Size Adjustments to Smallest Available Sign Size (A,B,C)
- C = Left or Right (L or R)
- DD = Year of update

- Example 1: Size Adjustment - FTP-001A-25
- Example 2: Direction Application - FTP-103R-25
- Example 3: Size and Direction - FTP-037AR-25

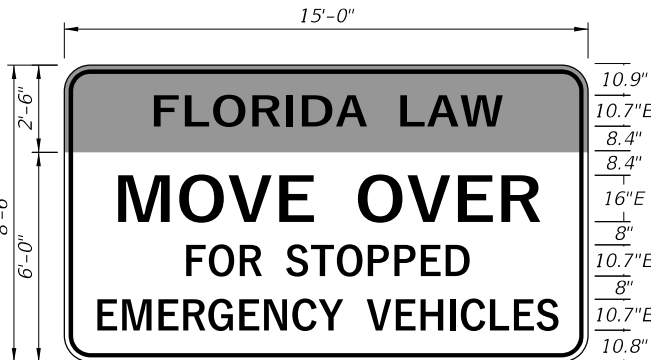
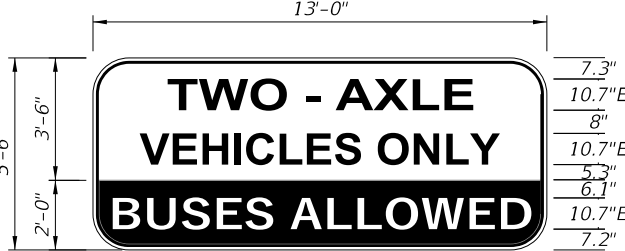

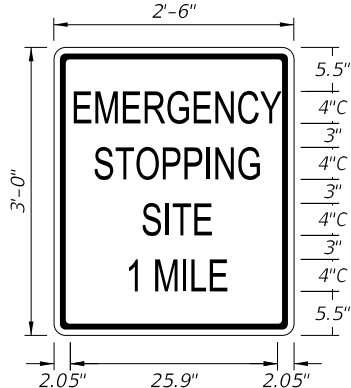
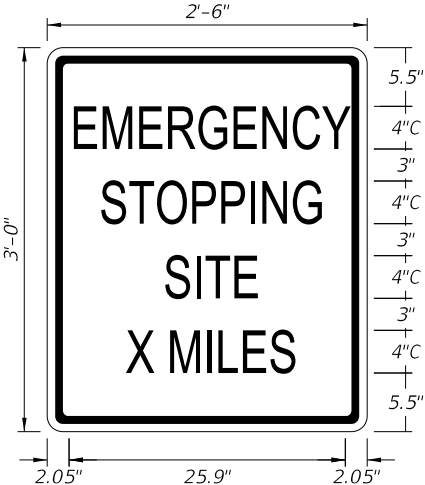
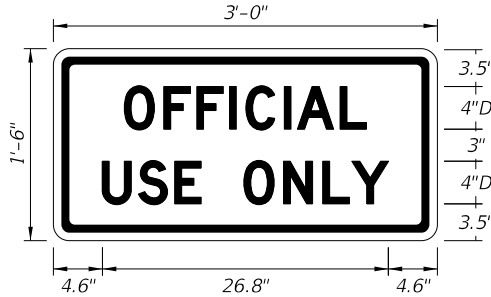
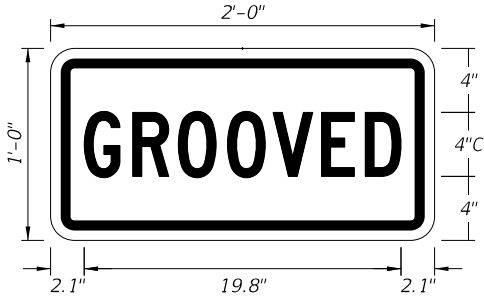
SIGN TYPES (AAA):

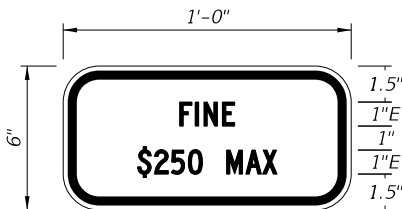
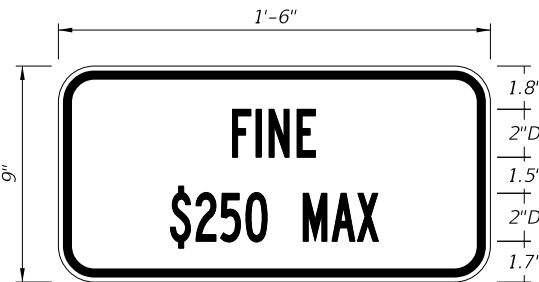
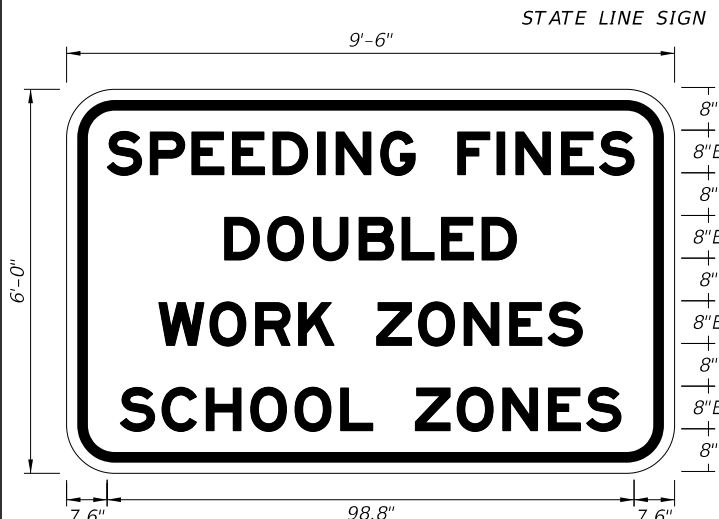
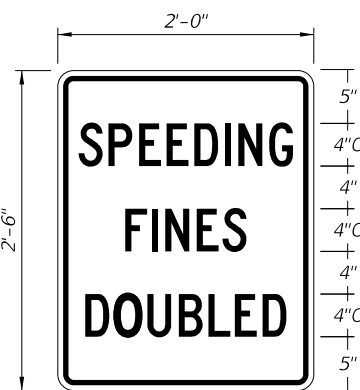
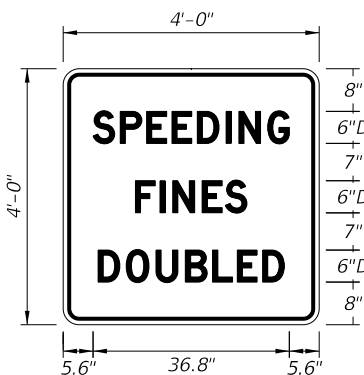
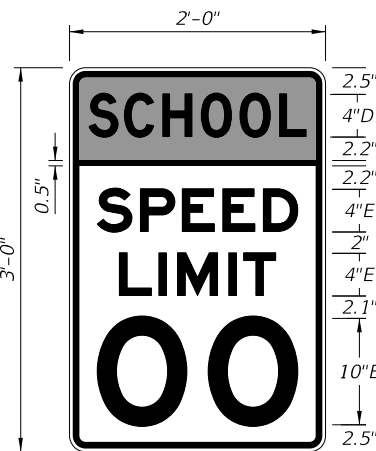
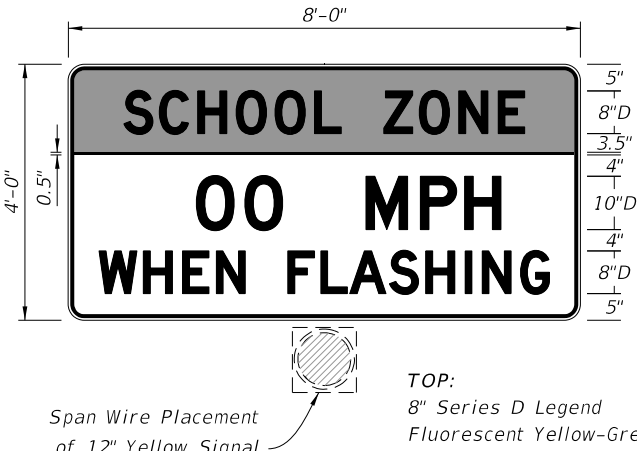
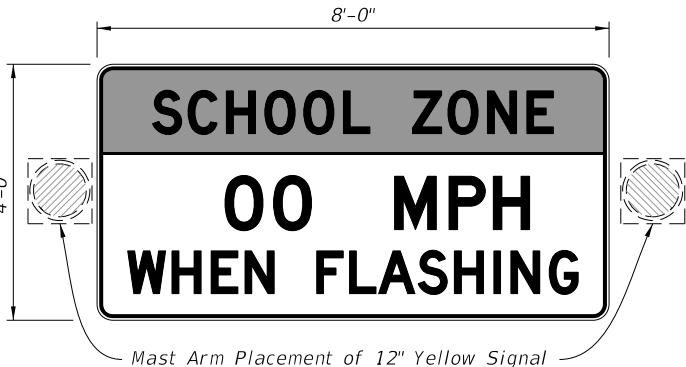
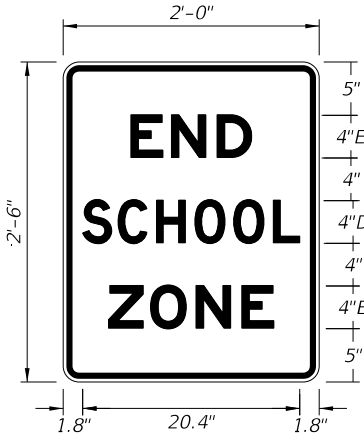
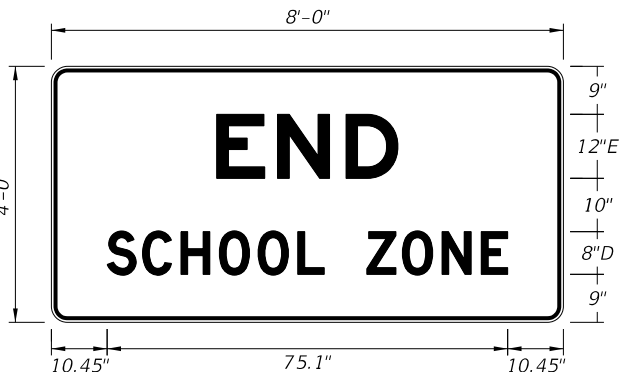
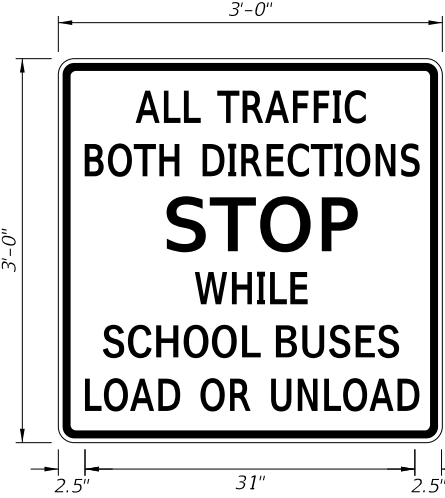
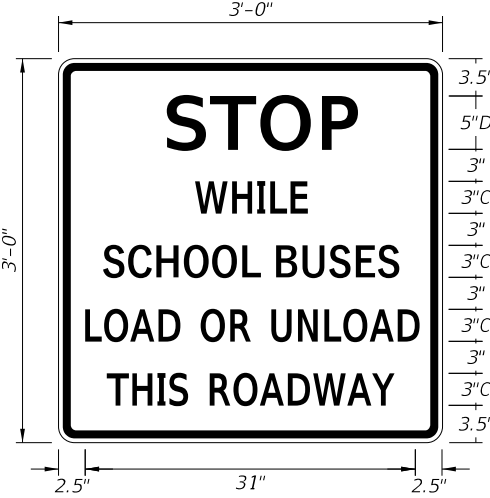
- FTP-001-199: Regulatory
- FTP-200-399: Warning & Advisory
- FTP-400-599: Motorist Service
- FTP-600-799: Guide
- FTP-800-899: Recreational & Cultural
- FTP-900-999: Miscellaneous
- TTC-001-199: Temporary Traffic Control
- AET-001-199: All Electronic Tolling
- TOL-001-199: Toll Road

TABLE OF CONTENTS:	
Sheet	Description
1	General Notes and Table of Contents
2	Sign Details FTP-001-25 through FTP-007B-25
3	Sign Details FTP-008-25 through FTP-018-25
4	Sign Details FTP-019-25 through FTP-026-25
5	Sign Details FTP-027-25 through FTP-034U-25
6	Sign Details FTP-035L-25 through FTP-037-25
7	Sign Details FTP-200-25 through FTP-206B-25
8	Sign Details FTP-207-25 through FTP-208A-25
9	Sign Details FTP-400-25 through FTP-409-25
10	Sign Details FTP-410-25 through FTP-415A-25
11	Sign Details FTP-416-25 through FTP-417-25
12	Sign Details FTP-418-25 through FTP-422B-25
13	Sign Details FTP-423-25 through FTP-423A-25
14	Sign Details FTP-600-25 through FTP-609-25
15	Sign Details FTP-610-25 through FTP-611B-25
16	Sign Details FTP-612-25 through FTP-613-25
17	Sign Details FTP-614-25 through FTP-616A-25
18	Sign Details FTP-800-25 through FTP-802A-25
19	Sign Details TTC-001-25 through TTC-010-25
20	Sign Details TTC-011-25 through TTC-018-25
21	Sign Details TTC-019-25 through TTC-020B-25
22	Sign Details AET-001-26 through AET-002A1-26
23	Sign Details TOL-001-26 through TOL-011-26
24	Sign Details TOL-012-26 through TOL-020-26
25	Sign Details TOL-021-26 through TOL-024B-26
26	Sign Details TOL-025-26 through TOL-033-26
27	Sign Details TOL-034-26 through TOL-043B-26
28	Sign Details TOL-044-26 through TOL-052A-26
29	Sunpass Shield, Toll Attendant Shield, Epass Shield, and Additions Shields
APPENDIX	Crosswalk













10/28/2026 1:35:36 PM

OTHER THAN FREEWAY USE		FREEWAY USE			
FTP-001-25 7'-0" X 3'-6" 3" Radii 1" Border		FTP-001A-25 11'-6" X 5'-6" 9" Radii 2" Border		FTP-002R-25 FTP-002L-25 14'-6" X 7'-6" 9" Radii 2" Border	
6" Series E Legend White Background Black Legend and Border		10" Series E Legend White Background Black Legend and Border		10" Series E Legend White Background Black Legend and Border	
FTP-004-25 4'-0" X 3'-0" 1.5" Radii 3/4" Border		FTP-004A-25 9'-0" X 6'-0" 9" Radii 3/4" Border		FTP-005-25 2'-0" X 2'-6" 1.5" Radii 5/8" Border	
4" Series C Legend White Background Black Legend and Border		8" Series D Legend White Background Black Legend and Border		2" Series D Legend White Background - Green Florida Symbol Black Legend, Border and Man Belt Symbol	
		NON-LIMITED ACCESS		NON-LIMITED ACCESS	
FTP-006-25 4'-0" X 4'-0" 1.5" Radii 0.4" Border					
2.5" Series C Legend 2" Series C Legend 1.5" Series C Legend White Background Black Legend and Border		FTP-007-25 4'-0" X 2'-0" 1.5" Radii 0.8" Border		FTP-007A-25 6'-6" X 3'-0" 3" Radii 1" Border	
		TOP: 4" Series C Legend Yellow Background Black Legend and Border BOTTOM: 4" Series C Legend White Background Black Legend and Border		TOP: 6" Series D Legend Yellow Background Black Legend and Border BOTTOM: 6" Series D Legend White Background Black Legend and Border	
				FTP-007B-25 10'-0" X 4'-6" 6" Radii X 1" Border	
				TOP: 8" Series D Legend Yellow Background Black Legend and Border BOTTOM: 8" Series D Legend White Background Black Legend and Border	
LAST REVISION 11/01/26	REVISION	DESCRIPTION:		FY 2027-28 STANDARD PLANS	
		FDOT		SPECIAL SIGN DETAILS	
				INDEX 700-102	SHEET 2 of 29


 <p>15'-0"</p> <p>8'-6"</p> <p>6'-0"</p> <p>2'-6"</p> <p>10.9"</p> <p>10.7"E</p> <p>8.4"</p> <p>8.4"</p> <p>16"E</p> <p>8"</p> <p>10.7"E</p> <p>8"</p> <p>10.7"E</p> <p>10.8"</p> <p>FLORIDA LAW</p> <p>MOVE OVER</p> <p>FOR STOPPED</p> <p>EMERGENCY VEHICLES</p> <p><i>TOP:</i> 10.7" Series E Legend Yellow Background Black Legend and Border <i>BOTTOM:</i> 10.7" and 16" Series E Legend White Background Black Legend and Border</p> <p>FTP-008-25 15'-0" X 8'-6" 9" Radii 1.5" Border</p>		<p>LIMITED ACCESS</p>  <p>13'-0"</p> <p>5'-6"</p> <p>3'-6"</p> <p>2'-0"</p> <p>7.3"</p> <p>10.7"E</p> <p>8"</p> <p>10.7"E</p> <p>5.3"</p> <p>6.1"</p> <p>10.7"E</p> <p>7.2"</p> <p>TWO - AXLE</p> <p>VEHICLES ONLY</p> <p>BUSES ALLOWED</p> <p><i>TOP:</i> 10.7" Series E Legend White Background Black Legend and Border <i>BOTTOM:</i> 10.7" Series E Legend Black Background White Legend</p> <p>FTP-009-25 13'-0" X 5'-6" 6" Radii 1" Border</p>		 <p>2'-6"</p> <p>2'-6"</p> <p>2.05"</p> <p>25.9"</p> <p>2.05"</p> <p>6"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>6"</p> <p>EMERGENCY</p> <p>STOPPING</p> <p>SITE</p> <p><i>4" Series C Legend White Background Black Legend and Border</i></p> <p>FTP-010-25 2'-6" X 2'-6" 1.5" Radii 0.625" Border</p>		 <p>2'-6"</p> <p>3'-0"</p> <p>2.05"</p> <p>25.9"</p> <p>2.05"</p> <p>5.5"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>5.5"</p> <p>EMERGENCY</p> <p>STOPPING</p> <p>SITE</p> <p>1 MILE</p> <p><i>4" Series C Legend White Background Black Legend and Border</i></p> <p>FTP-011-25 2'-6" X 3'-0" 1.5" Radii ¾" Border</p>					
 <p>2'-6"</p> <p>3'-0"</p> <p>2.05"</p> <p>25.9"</p> <p>2.05"</p> <p>5.5"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>3"</p> <p>4"C</p> <p>5.5"</p> <p>EMERGENCY</p> <p>STOPPING</p> <p>SITE</p> <p>X MILES</p> <p><i>4" Series C Legend White Background Black Legend and Border</i></p> <p>FTP-012-25 2'-6" X 3'-0" 1.5" Radii ¾" Border</p>		 <p>3'-0"</p> <p>1'-6"</p> <p>4.6"</p> <p>26.8"</p> <p>4.6"</p> <p>3.5"</p> <p>4"D</p> <p>3"</p> <p>4"D</p> <p>3.5"</p> <p>OFFICIAL</p> <p>USE ONLY</p> <p><i>4" Series D Legend White Background Black Legend and Border</i></p> <p>FTP-013-25 3'-0" X 1'-6" 1.5" Radii ¾" Border</p>		 <p>2'-0"</p> <p>1'-0"</p> <p>2.1"</p> <p>19.8"</p> <p>2.1"</p> <p>4"</p> <p>4"C</p> <p>4"</p> <p>GROOVED</p> <p><i>4" Series C Legend Yellow Background Black Legend and Border</i></p> <p>FTP-014-25 2'-0" X 1'-0" 1.5" Radii ⅝" Border</p>		 <p>2'-6"</p> <p>3'-0"</p> <p>3.1"</p> <p>23.8"</p> <p>3.1"</p> <p>5"</p> <p>2" C</p> <p>4"</p> <p>4"C</p> <p>4"</p> <p>4"C</p> <p>4"</p> <p>4"C</p> <p>5"</p> <p>FLORIDA LITTER LAW</p> <p>\$150 MIN</p> <p>FINE FOR</p> <p>LITTERING</p> <p><i>2" and 4" Series C Legend White Background Black Legend and Border</i></p> <p>FTP-015-25 2'-6" X 3'-0" 1.5" Radii ¾" Border</p>					
 <p>3'-6"</p> <p>4'-0"</p> <p>3.15"</p> <p>35.7"</p> <p>3.15"</p> <p>6"</p> <p>3"C</p> <p>5"</p> <p>6"C</p> <p>5"</p> <p>6"C</p> <p>5"</p> <p>6"C</p> <p>6"</p> <p>FLORIDA LITTER LAW</p> <p>\$150 MIN</p> <p>FINE FOR</p> <p>LITTERING</p> <p><i>3" and 6" Series C Legend White Background Black Legend and Border</i></p> <p>FTP-015A-25 3'-6" X 4'-0" 1.5" Radii ¾" Border</p>		 <p>1'-0"</p> <p>1'-6"</p> <p>1.4"</p> <p>9.2"</p> <p>1.4"</p> <p>2.5"</p> <p>4"C</p> <p>1.2"</p> <p>2"C</p> <p>1.2"</p> <p>2"C</p> <p>1.2"</p> <p>1.5"</p> <p>2.4"</p> <p>24</p> <p>HOUR</p> <p>PARKING</p> <p>← →</p> <p><i>4" Series D and 2" Series C Legend White Background Green Legend and Border</i></p> <p>FTP-016-25 1'-0" X 1'-6" 1.5" Radii ⅜" Border</p>		 <p>1'-0"</p> <p>1'-6"</p> <p>1.5"</p> <p>6"</p> <p>1"</p> <p>1"</p> <p>1"C</p> <p>1"</p> <p>1"C</p> <p>1"</p> <p>1"C</p> <p>1"</p> <p>1.5"</p> <p>PARKING BY</p> <p>DISABLED</p> <p>PERMIT</p> <p>ONLY</p> <p><i>TOP:</i> Blue Background White Border <i>BOTTOM:</i> 1" Series C Legend White Background Black Legend and Border</p> <p>FTP-017-25 1'-0" X 1'-6" 1.5" Radii ⅜" Border</p>		 <p>1'-6"</p> <p>1'-0"</p> <p>3.25"</p> <p>11.5"</p> <p>3.25"</p> <p>1'-6"</p> <p>3.85"</p> <p>10.3"</p> <p>3.85"</p> <p>2.5"</p> <p>13"</p> <p>2.5"</p> <p>1.5"</p> <p>1.5"C</p> <p>1"</p> <p>1.5"C</p> <p>1"</p> <p>1.5"C</p> <p>1"</p> <p>1.5"</p> <p>PARKING BY</p> <p>DISABLED</p> <p>PERMIT</p> <p>ONLY</p> <p><i>TOP:</i> Blue Background White Border <i>BOTTOM:</i> 1.5" Series C Legend White Background Black Legend and Border</p> <p>FTP-018-25 1'-6" X 2'-6" 1.5" Radii ⅜" Border</p>					
LAST REVISION 11/01/26		DESCRIPTION:		 FY 2027-28 STANDARD PLANS		SPECIAL SIGN DETAILS		INDEX 700-102		SHEET 3 of 29	

<div></div> <div><p>NOTE: Supplemental Panel for the FTP-017-25 sign.</p></div> <div><p>FTP-019-25 1'-0" X 6" 1.5" Radii 3⁄8" Border</p><p>1" Series E Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>NOTE: Supplemental Panel for the FTP-018-25 sign.</p></div> <div><p>FTP-019A-25 1'-6" X 9" 1.5" Radii 3⁄8" Border</p><p>2" Series D Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-020-25 9'-6" X 6'-0" 9" Radii 2" Border</p><p>8" Series E Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-021-25 2'-0" X 2'-6" 1.5" Radii 1⁄2" Border</p><p>4" Series C Legend White Background Black Legend and Border</p></div>			
<div></div> <div><p>FTP-021A-25 4'-0" X 4'-0" 3" Radii 3⁄4" Border</p><p>6" Series D Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-022-25 2'-0" X 3'-0" 1.5" Radii 5⁄8" Border</p><p>TOP: 4" Series D Legend Fluorescent Yellow-Green Background Black Legend and Border BOTTOM: 4" and 10" Series E Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-023-25 8'-0" X 4'-0" 3" Radii 3⁄4" Border</p><p>TOP: 8" Series D Legend Fluorescent Yellow-Green Background Black Legend and Border BOTTOM: 8" and 10" Series D Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-023A-25 8'-0" X 4'-0" 3" Radii 3⁄4" Border</p><p>TOP: 8" Series D Legend Fluorescent Yellow-Green Background Black Legend and Border BOTTOM: 8" and 10" Series D Legend White Background Black Legend and Border</p></div>			
<div></div> <div><p>FTP-024-25 2'-0" X 2'-6" 1.5" Radii 5⁄8" Border</p><p>4" Series D and E Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-024A-25 8'-0" X 4'-0" 3" Radii 3⁄4" Border</p><p>12" Series E and 8" Series D Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-025-25 3'-0" X 3'-0" 1.5" Radii 3⁄4" Border</p><p>3" Series C Legend and 5" Series D Legend White Background Black Legend and Border</p></div>		<div></div> <div><p>FTP-026-25 3'-0" X 3'-0" 1.5" Radii 3⁄4" Border</p><p>3" Series C Legend 5" Series D Legend White Background Black Legend and Border</p></div>			
LAST REVISION 11/01/26	REVISION	DESCRIPTION:		FY 2027-28 STANDARD PLANS		SPECIAL SIGN DETAILS		INDEX 700-102	SHEET 4 of 29

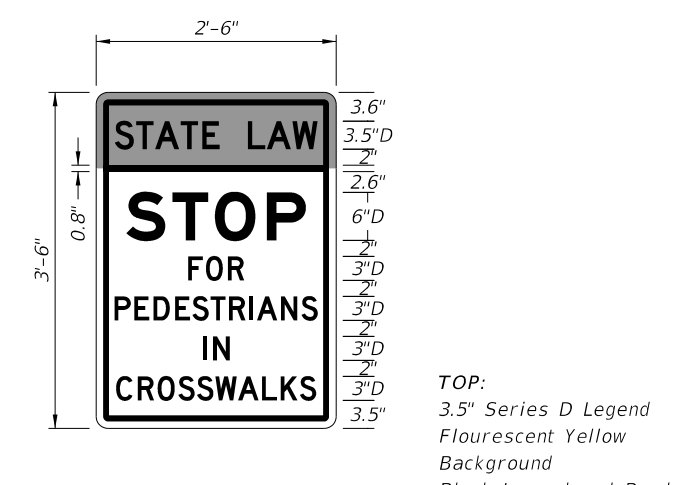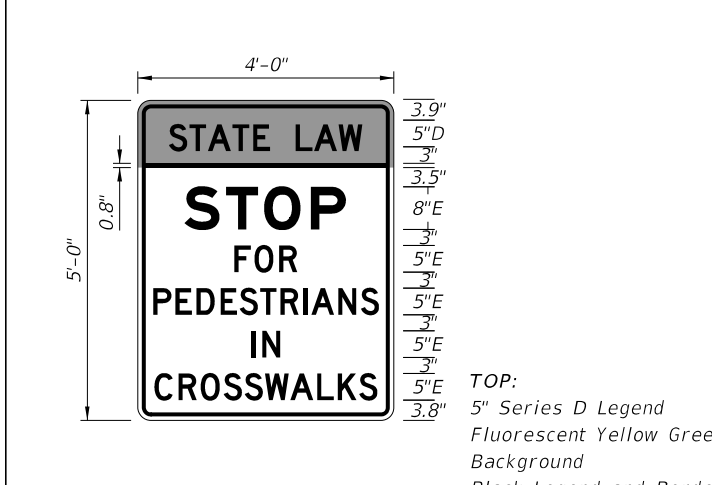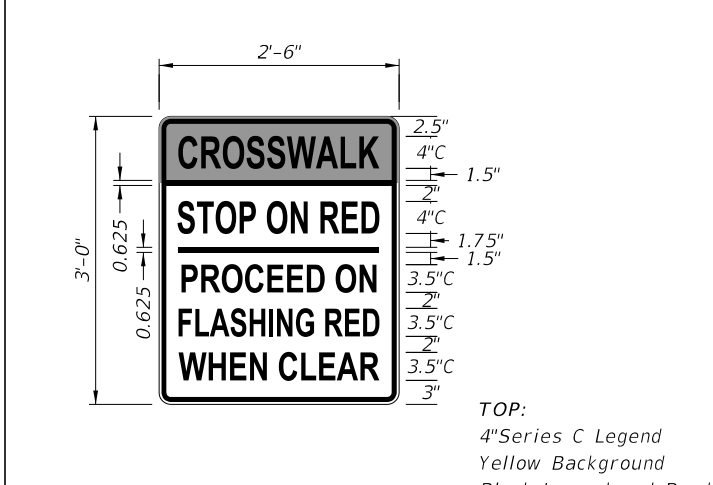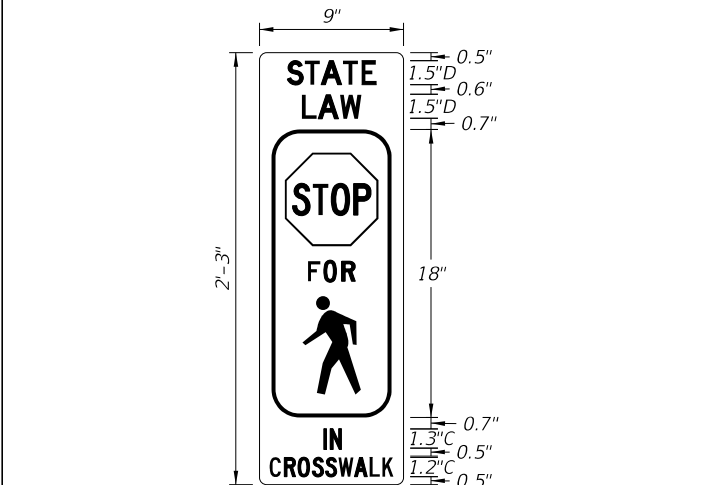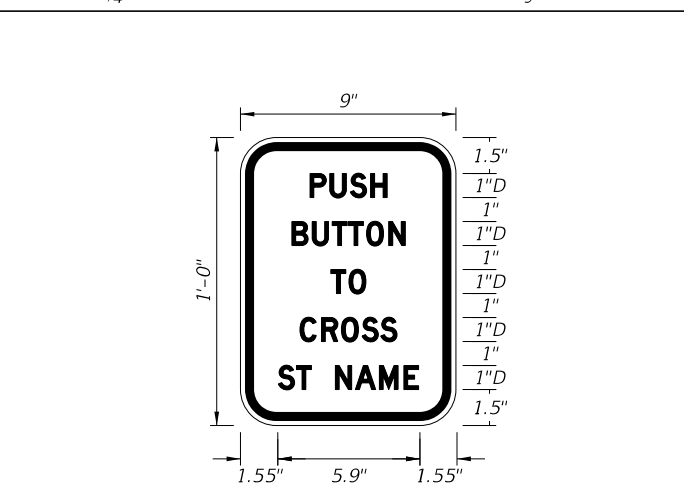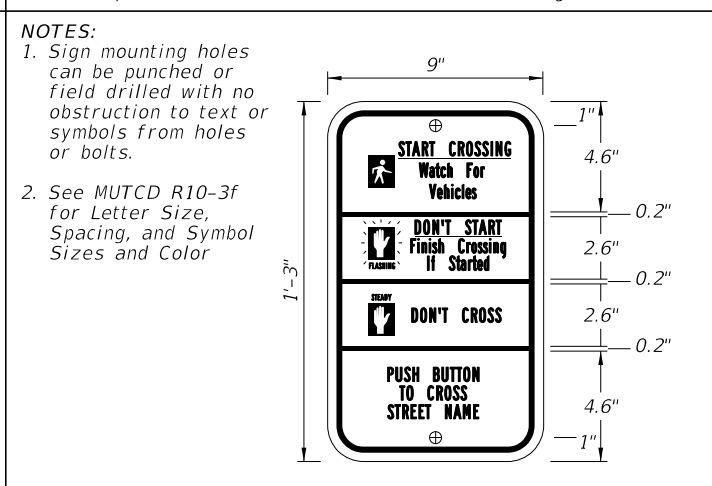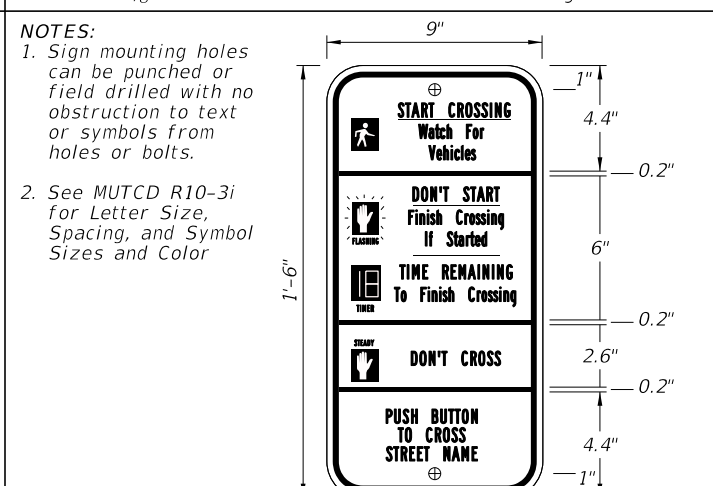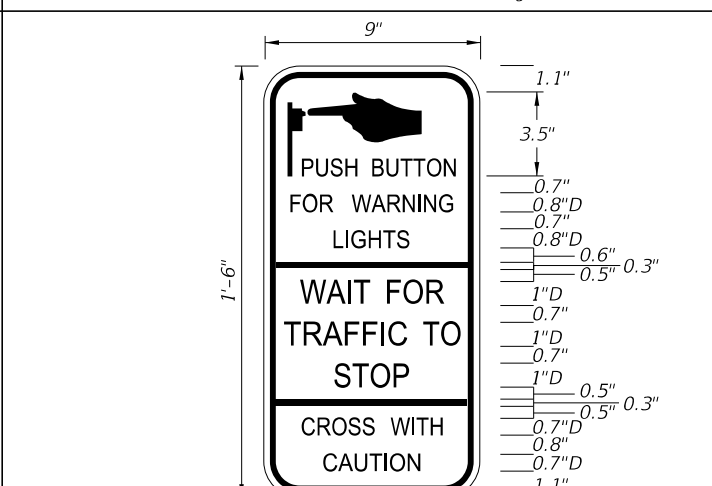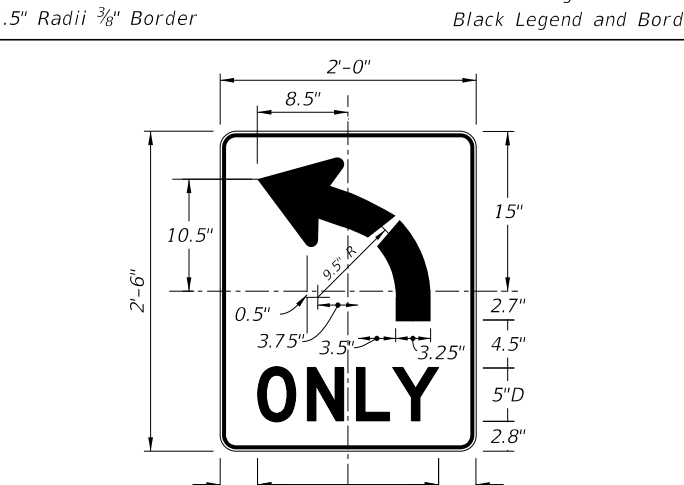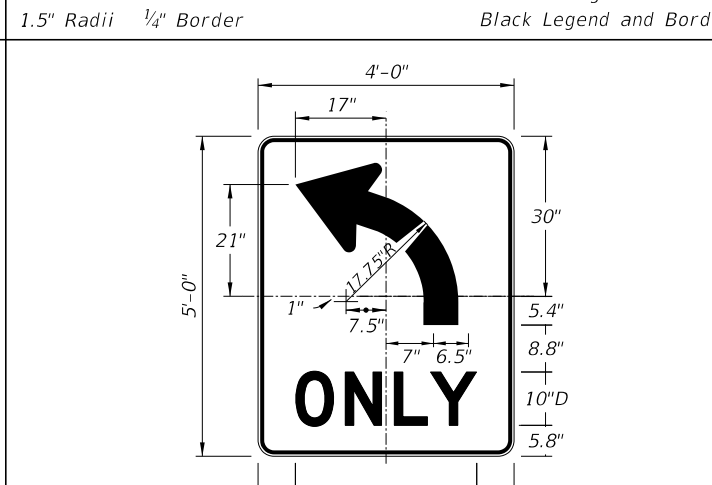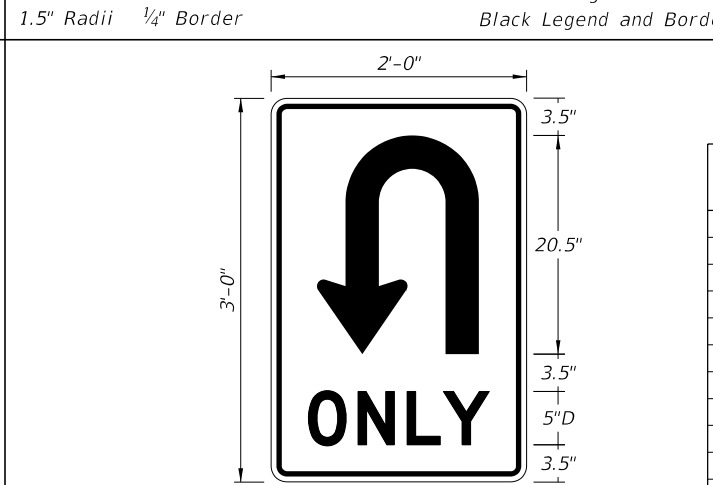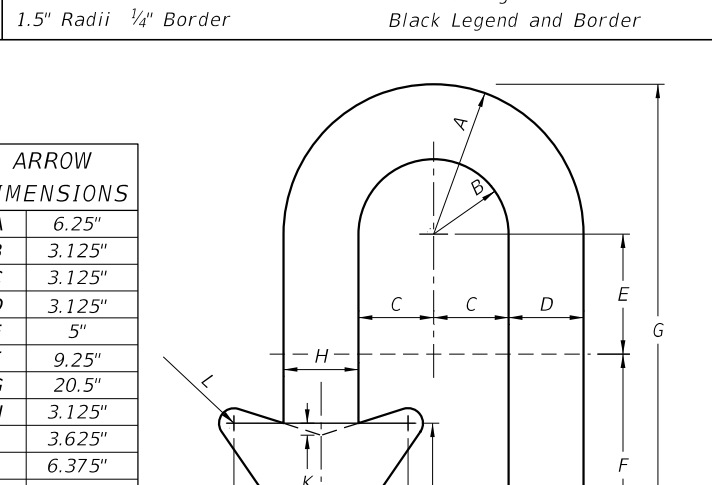
9/28/2026 12:14:12 PM

 <p>FTP-027-25 2'-6" X 3'-6" 1.5" Radii 3/4" Border</p>		 <p>FTP-027A-25 4'-0" X 5'-0" 3" Radii 3/4" Border</p>		 <p>FTP-028-25 2'-6" X 3'-0" 1.5" Radii 3/8" Border</p>		 <p>FTP-029-25 9" X 2'-3" 1.5" Radii No Border</p>																											
 <p>FTP-030-25 9" X 1'-0" 1.5" Radii 3/8" Border</p>		<p>NOTES:</p> <ol style="list-style-type: none">Sign mounting holes can be punched or field drilled with no obstruction to text or symbols from holes or bolts.See MUTCD R10-3f for Letter Size, Spacing, and Symbol Sizes and Color  <p>FTP-031-25 9" X 1'-3" 1.5" Radii 1/4" Border</p>		<p>NOTES:</p> <ol style="list-style-type: none">Sign mounting holes can be punched or field drilled with no obstruction to text or symbols from holes or bolts.See MUTCD R10-3i for Letter Size, Spacing, and Symbol Sizes and Color  <p>FTP-032-25 9" X 1'-6" 1.5" Radii 1/4" Border</p>		 <p>FTP-033-25 9" X 1'-6" 1.5" Radii 1/4" Border</p>																											
 <p>FTP-034L-25 FTP-034R-25 2'-0" X 2'-6" 1.5" Radii 3/8" Border</p> <p>NOTE: Use FTP-034R-25 for RIGHT TURN ONLY</p>		 <p>FTP-034AL-25 FTP-034AR-25 4'-0" X 5'-0" 3" Radii 3/4" Border</p> <p>NOTE: Use FTP-034AR-25 for RIGHT TURN ONLY</p>		 <p>FTP-034U-25 2'-0" X 3'-0" 1.5" Radii 3/4" Border</p>		<table><tr><th colspan="2">ARROW DIMENSIONS</th></tr><tr><td>A</td><td>6.25"</td></tr><tr><td>B</td><td>3.125"</td></tr><tr><td>C</td><td>3.125"</td></tr><tr><td>D</td><td>3.125"</td></tr><tr><td>E</td><td>5"</td></tr><tr><td>F</td><td>9.25"</td></tr><tr><td>G</td><td>20.5"</td></tr><tr><td>H</td><td>3.125"</td></tr><tr><td>I</td><td>3.625"</td></tr><tr><td>J</td><td>6.375"</td></tr><tr><td>K</td><td>0.5"</td></tr><tr><td>L</td><td>0.625"</td></tr></table>  <p>DETAILS</p>		ARROW DIMENSIONS		A	6.25"	B	3.125"	C	3.125"	D	3.125"	E	5"	F	9.25"	G	20.5"	H	3.125"	I	3.625"	J	6.375"	K	0.5"	L	0.625"
ARROW DIMENSIONS																																	
A	6.25"																																
B	3.125"																																
C	3.125"																																
D	3.125"																																
E	5"																																
F	9.25"																																
G	20.5"																																
H	3.125"																																
I	3.625"																																
J	6.375"																																
K	0.5"																																
L	0.625"																																
LAST REVISION 11/01/26	DESCRIPTION:	FY 2027-28 STANDARD PLANS		SPECIAL SIGN DETAILS		INDEX 700-102	SHEET 5 of 29																										

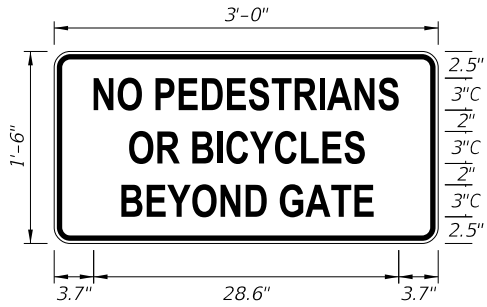12/14/15 PM
9/28/2026













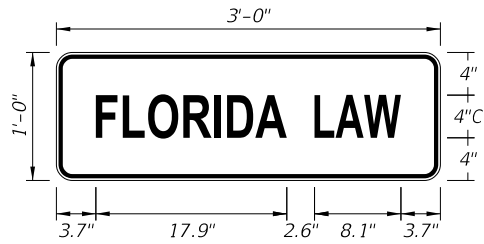
FTP-036-25
3'-0" X 1'-6"
1.5" Radii 0.5" Border
3" Series C Legend
White Background
Black Legend and Border














FTP-037-25
3'-0" X 1'-0"
1.5" Radii 0.4" Border
4" Series C Legend
Fluorescent Yellow Green
Background
Black Legend and Border

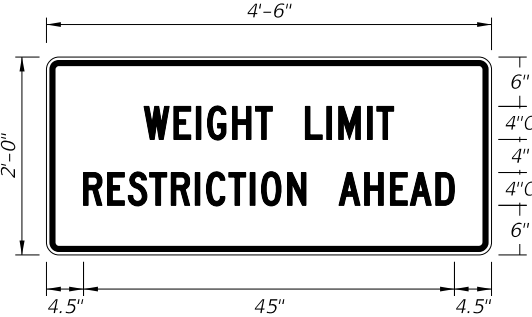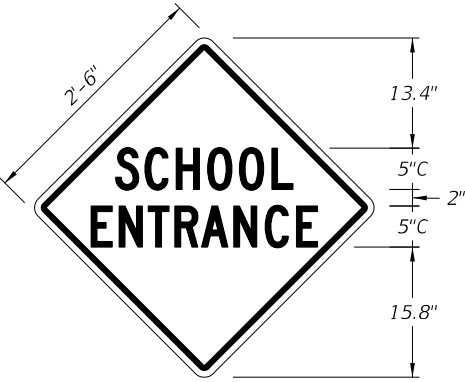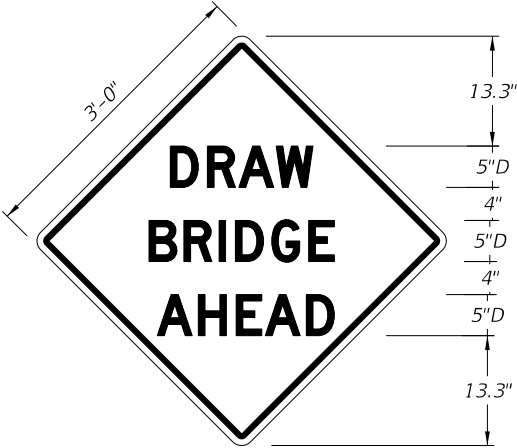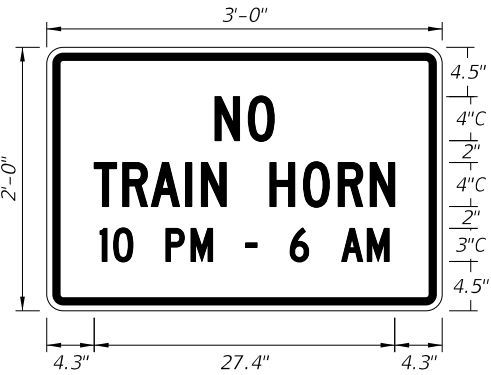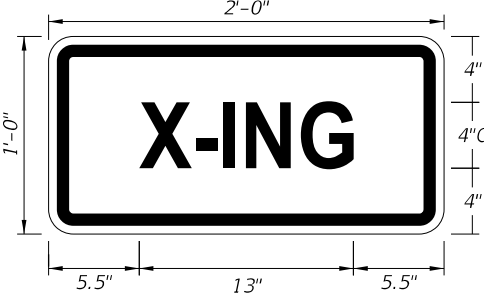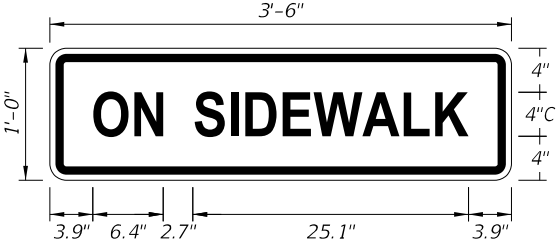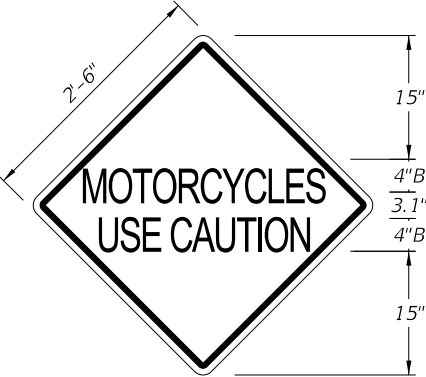
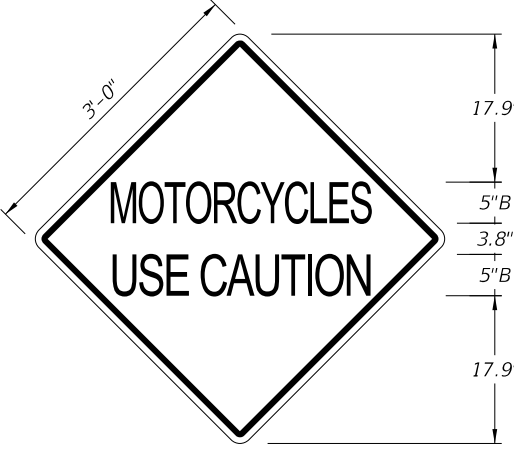
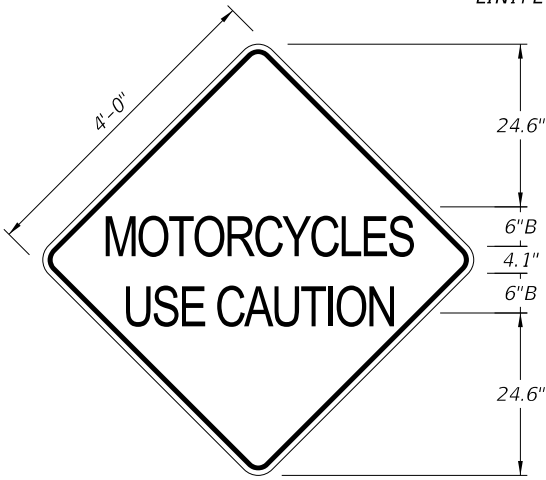
9/28/2026 12:14:18 PM


 <p>FTP-200-25 4'-6" X 2'-0" 1.5" Radii ¾" Border</p> <p>4" Series C Legend Yellow Background Black Legend and Border</p>		 <p>FTP-201-25 2'-6" X 2'-6" 1.5" Radii ¾" Border</p> <p>5" Series C Legend Fluorescent Yellow-Green Background Black Legend and Border</p>		 <p>FTP-202-25 3'-0" X 3'-0" 1.5" Radii ¾" Border</p> <p>5" Series D Legend Yellow Background Black Legend and Border</p>		 <p>FTP-203-25 3'-0" X 2'-0" 1.5" Radii ¾" Border</p> <p>4" and 3" Series C Legend Yellow Background Black Legend and Border</p>	
 <p>FTP-203A-25 3'-0" X 3'-0" 1.5" Radii ¾" Border</p> <p>4" and 5" Series C Legend Yellow Background Black Legend and Border</p>		 <p>FTP-204-25 2'-0" X 1'-0" 1.5" Radii ¾" Border</p> <p>4" Series C Legend Yellow Background Black Legend and Border</p>		 <p>FTP-205-25 3'-6" X 1'-0" 1.5" Radii ¾" Border</p> <p>4" Series C Legend Yellow Background Black Legend and Border</p>		<p>SINGLE-LANE</p>  <p>FTP-206-25 2'-6" X 2'-6" 1.5" Radii ¾" Border</p> <p>4" Series B Legend Yellow Background Black Legend and Border</p>	
<p>MULTI-LANE</p>  <p>FTP-206A-25 3'-0" X 3'-0" 1.5" Radii ¾" Border</p> <p>5" Series B Legend Yellow Background Black Legend and Border</p>		<p>LIMITED ACESS</p>  <p>FTP-206B-25 4'-0" X 4'-0" 3" Radii ¾" Border</p> <p>6" Series B Legend Yellow Background Black Legend and Border</p>					
<div> <div>LAST REVISION</div> <div>11/01/26</div> </div> <div>DESCRIPTION:</div>		<div> <div>FDOT</div> <div>FY 2027-28 STANDARD PLANS</div> </div>		SPECIAL SIGN DETAILS		<div>INDEX</div> <div>700-102</div>	<div>SHEET</div> <div>7 of 29</div>
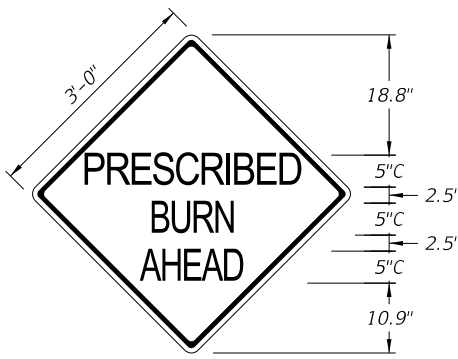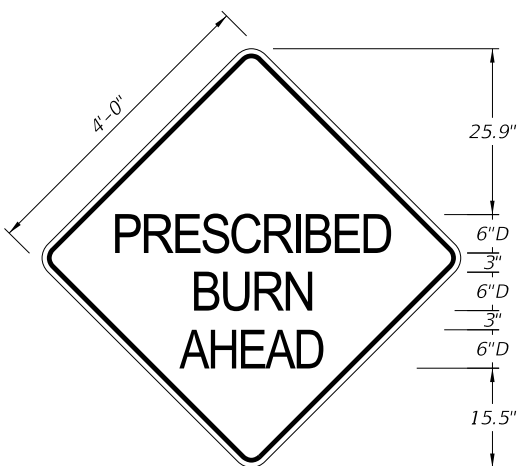
<p>NON-LIMITED ACCESS</p>  <p>FTP-207-25 3'-0" X 3'-0" 1.5" Radii $\frac{3}{4}$" Border</p> <p>5" Series C Legend Yellow Background Black Legend and Border</p>	<p>LIMITED ACCESS</p>  <p>FTP-207A-25 4'-0" X 4'-0" 3" Radii $\frac{3}{4}$" Border</p> <p>6" Series D Legend Yellow Background Black Legend and Border</p>	 <p>FTP-208-25 3'-0" X 3'-0" 3" Radii $\frac{3}{4}$" Border</p> <p>6" Series C Legend Yellow Background Black Legend and Border</p>	 <p>FTP-208A-25 4'-0" X 4'-0" 1.5" Radii $\frac{3}{4}$" Border</p> <p>8" Series C Legend Yellow Background Black Legend and Border</p>
--	---	--	--

--	--	--	--	--	--

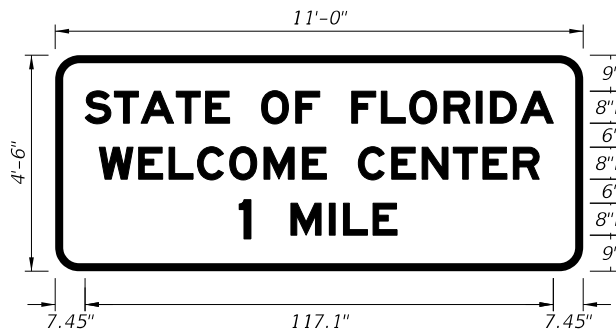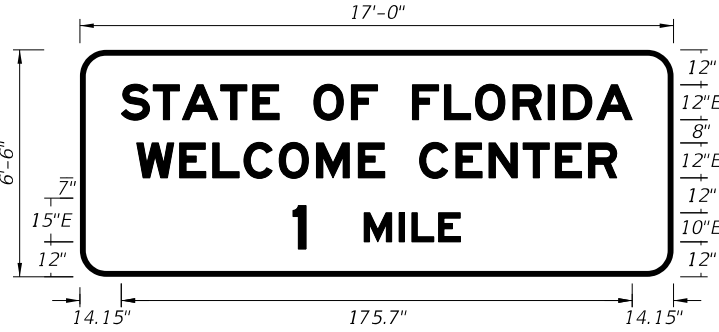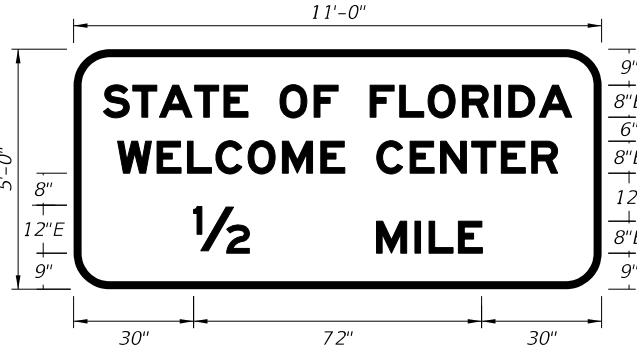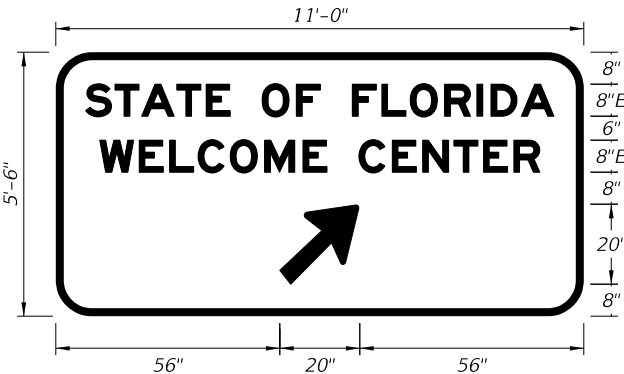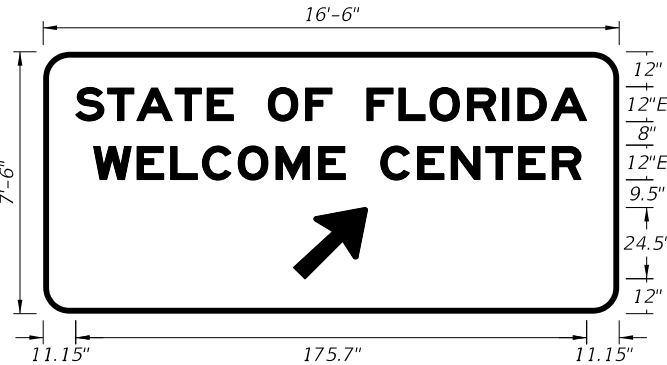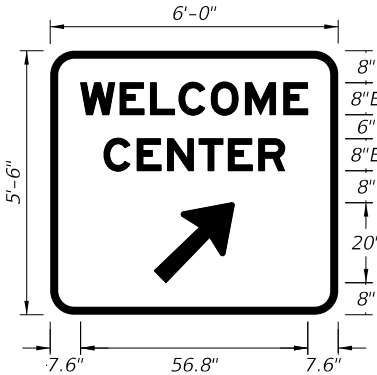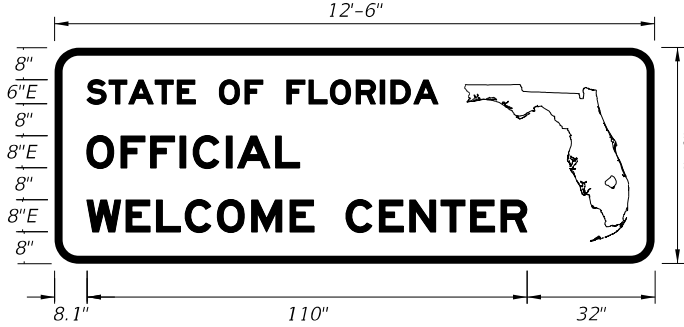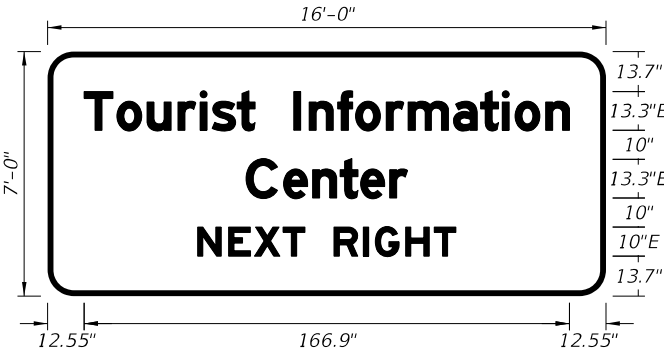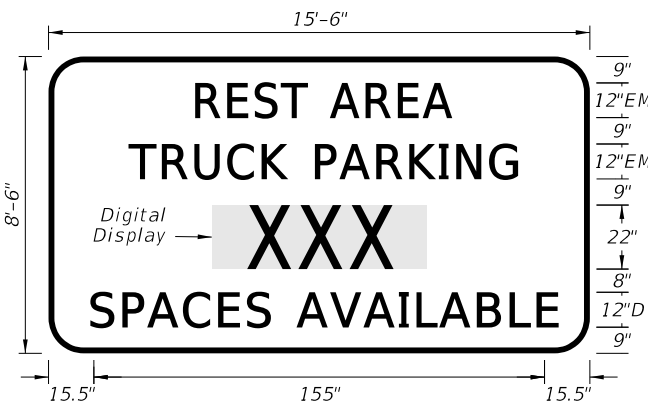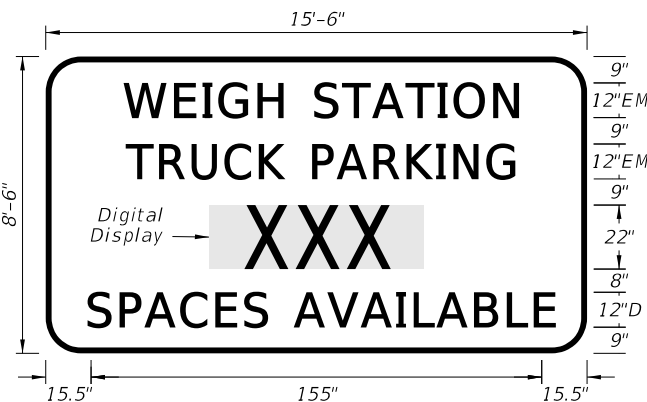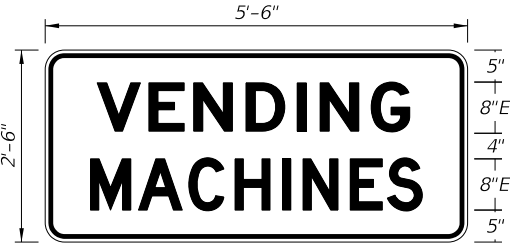 <p>FTP-400-25 11'-0" X 4'-6" 6" Radii 2" Border</p> <p>8" Series E Legend Blue Background White Legend and Border</p>		 <p>FTP-400A-25 17'-0" X 6'-6" 9" Radii 2" Border</p> <p>10", 12" and 15" Series E Legend Blue Background White Legend and Border</p>		 <p>FTP-401-25 11'-0" X 5'-0" 9" Radii 2" Border</p> <p>8" and 12" Series E Legend Blue Background White Legend and Border</p>		 <p>FTP-402-25 11'-0" X 5'-6" 9" Radii 2" Border</p> <p>8" Series E Legend Blue Background White Legend and Border</p>			
 <p>FTP-402A-25 16'-6" X 7'-6" 9" Radii 2" Border</p> <p>12" Series E Legend Blue Background White Legend and Border</p>		 <p>FTP-403-25 6' 0" X 5'-6" 6" Radii 2" Border</p> <p>8" Series E Legend Blue Background White Legend and Border</p>		 <p>FTP-404-25 12'-6" X 4'-6" 6" Radii 2" Border</p> <p>6" and 8" Series E Legend Blue Background White Legend and Border</p>		 <p>FTP-405-25 16'-0" X 7'-0" 9" Radii 2" Border</p> <p>10" and 13.3" Series E Legend Blue Background White Legend and Border</p>			
 <p>FTP-406-25 15'-6" X 8'-6" 12" Radii 2" Border</p> <p>12" Series D Legend 12" Series EM Legend Blue Background White Legend and Border</p>		 <p>FTP-407-25 15'-6" X 8'-6" 12" Radii 2" Border</p> <p>12" Series D Legend 12" Series EM Legend Blue Background White Legend and Border</p>		 <p>FTP-408-25 16'-6" X 8'-6" 12" Radii 2" Border</p> <p>12" Series D Legend 12" Series EM Legend Blue Background White Legend and Border</p>		 <p>FTP-409-25 5' 6" X 2'-6" 3" Radii 3/4" Border</p> <p>8" Series E Legend Blue Background White Legend and Border</p>			
LAST REVISION 11/01/26	REVISION	DESCRIPTION:		 FY 2027-28 STANDARD PLANS		SPECIAL SIGN DETAILS		INDEX 700-102	SHEET 9 of 29

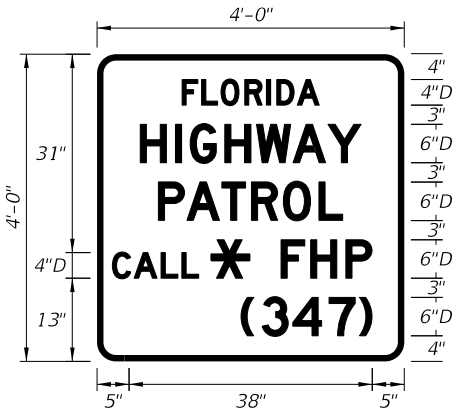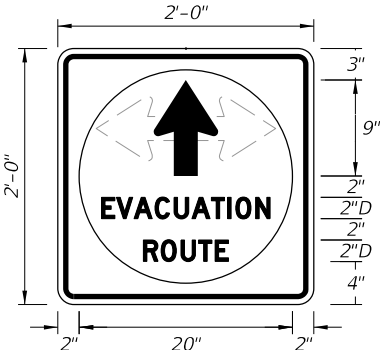
 <p>FTP-410-25 5'-6" X 2'-6" 3" Radii ¾" Border</p> <p>8" and 6" Series D Legend Blue Background White Legend and Border</p>		 <p>FTP-411-25 5'-6" X 1'-3" 3" Radii ¾" Border</p> <p>6" Series D Legend Blue Background White Legend and Border</p>		 <p>FTP-412-25 5'-6" X 1'-3" 3" Radii ¾" Border</p> <p>8" Series D Legend Blue Background White Legend and Border</p>		 <p>FTP-413-25 4'-0" X 4'-0" 3" Radii 1" Border</p> <p>4" and 6" Series D Legend Blue Background White Legend and Border</p>		
 <p>FTP-414-25 4'-0" X 5'-0" 3" Radii 1" Border</p> <p>6" Series D Legend Blue Background White Legend and Border</p>		 <p>FTP-414A-25 5'-6" X 6'-0" 3" Radii 1" Border</p> <p>8" Series D Legend Blue Background White Legend and Border</p>		 <p>DETAIL for FTP-414-25 and FTP-414A-25</p>		 <p>FTP-415-25 2'-0" X 2'-0" 1.5" Radii ½" Border</p> <p>2" Series D Legend White Background with Blue Circle Background White Legend and Border</p>		
 <p>FTP-415A-25 3'-0" X 3'-0" 1.5" Radii ½" Border</p> <p>4" Series C Legend White Backbround with Blue Circle Background White Legend and Border</p>								
LAST REVISION 11/01/26	REVISION	DESCRIPTION:		 FY 2027-28 STANDARD PLANS	SPECIAL SIGN DETAILS		INDEX 700-102	SHEET 10 of 29

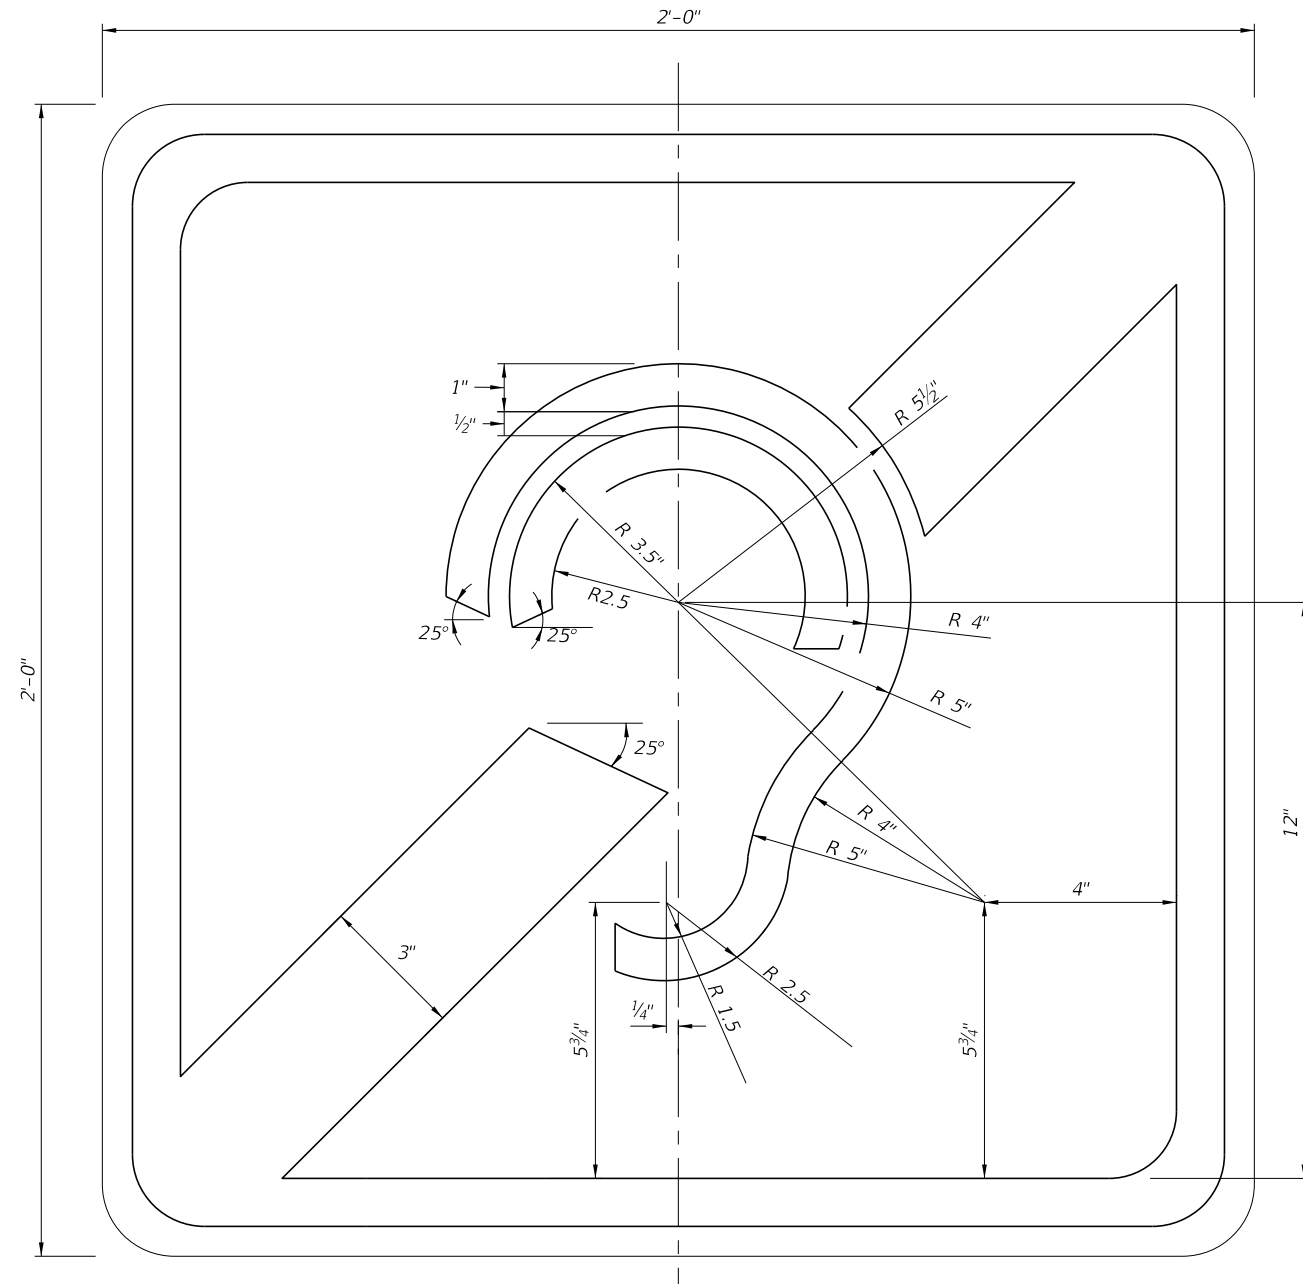

INTERNATIONAL SYMBOL OF
ACCESS FOR HEARING LOSS

FTP-416-25
2'-0" X 2'-0"
1.5" Radii $\frac{5}{8}$ " Border












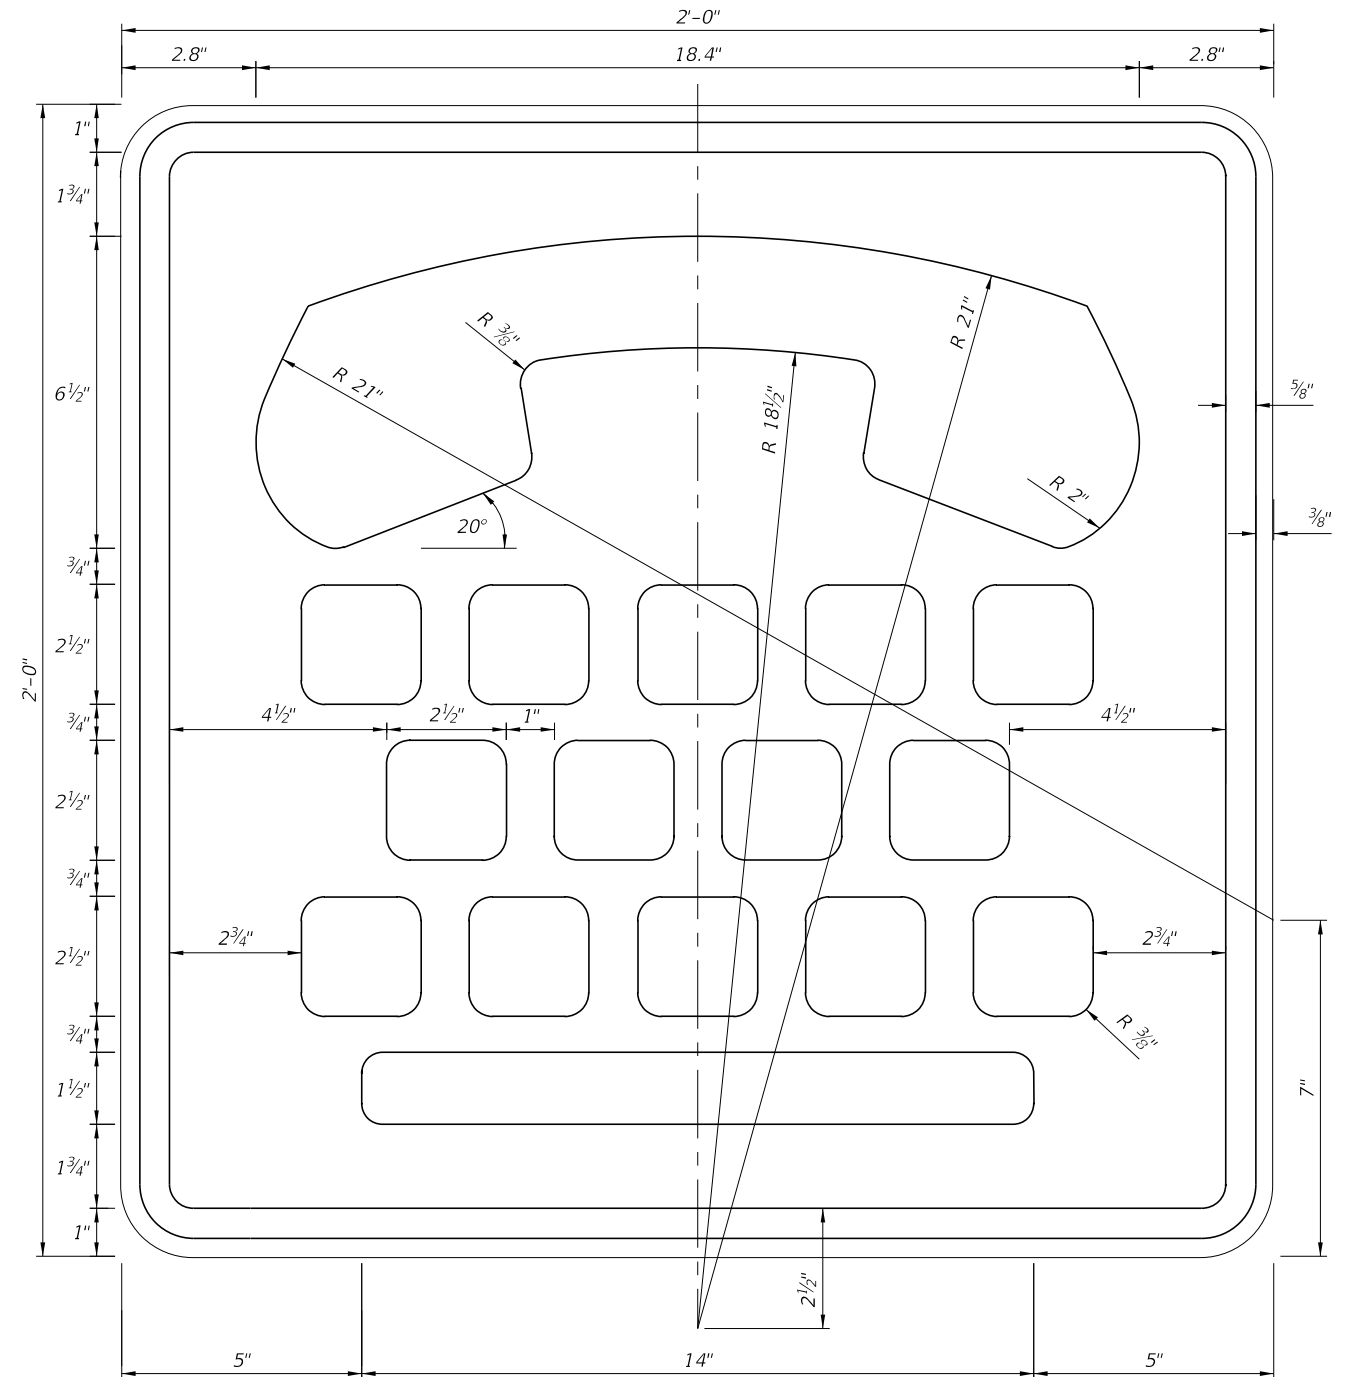
Blue Background
White Legend and Border



INTERNATIONAL TDD SYMBOL


FTP-417-25
2'-0" X 2'-0"
1.5" Radii 5/8" Border

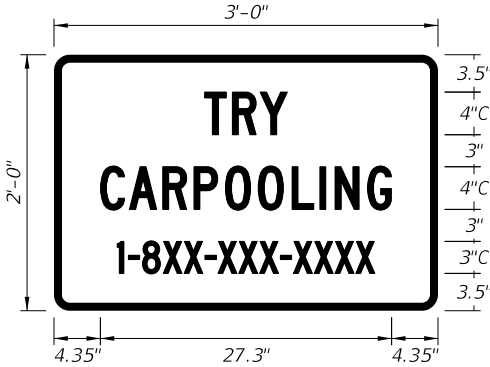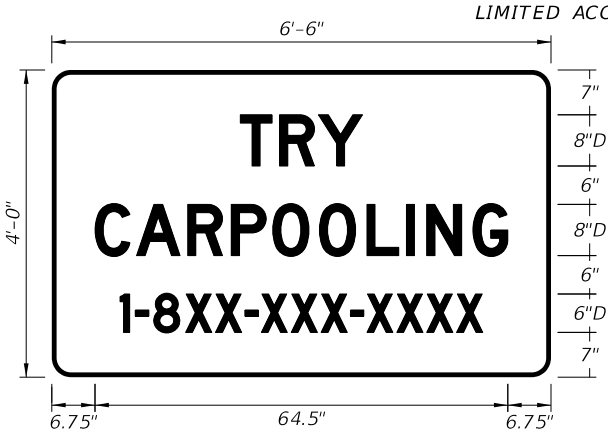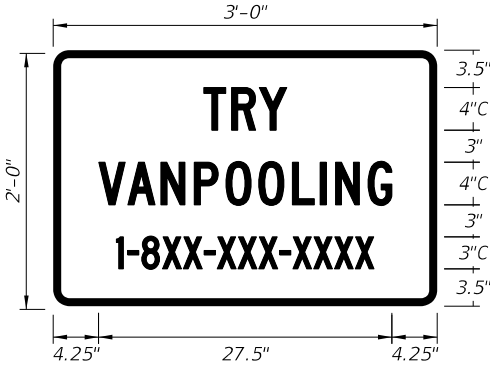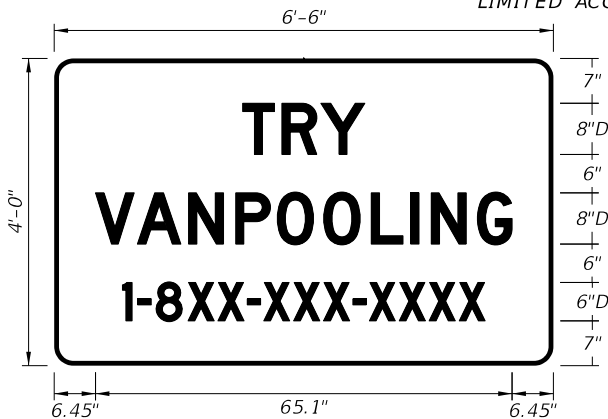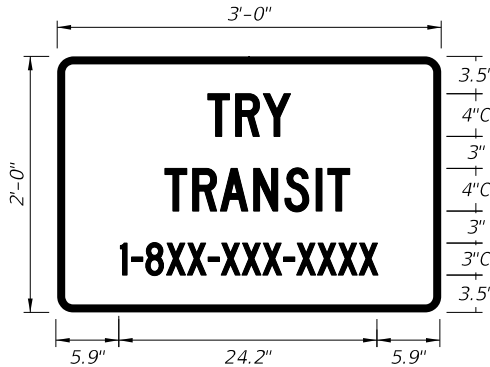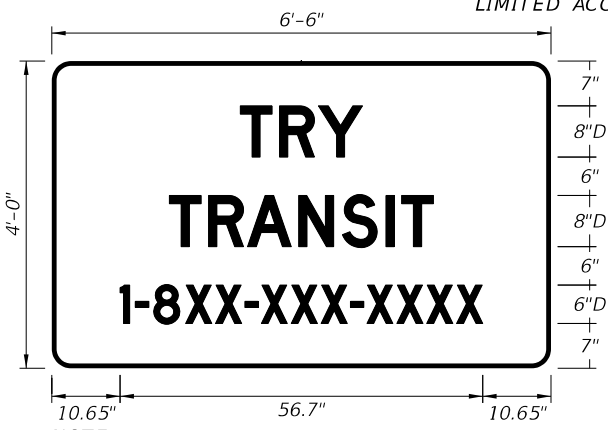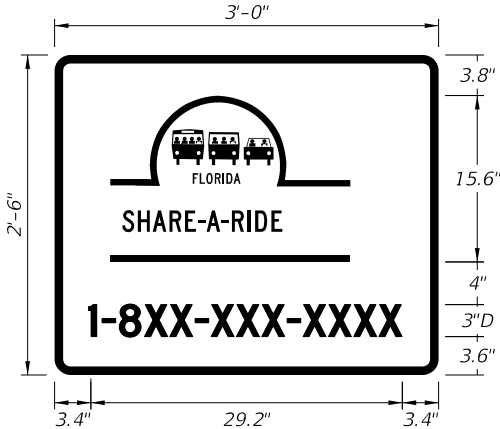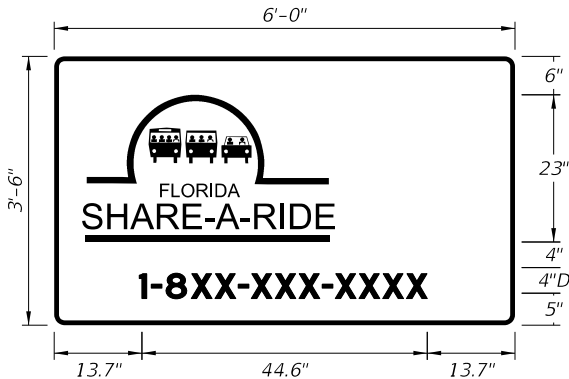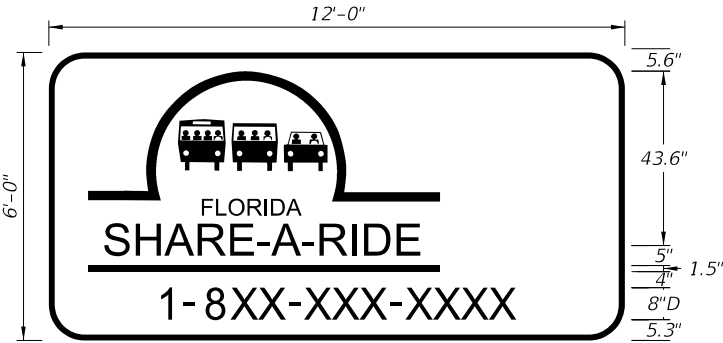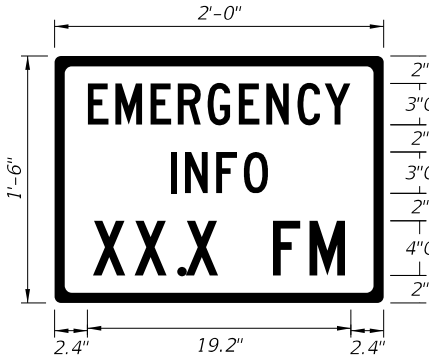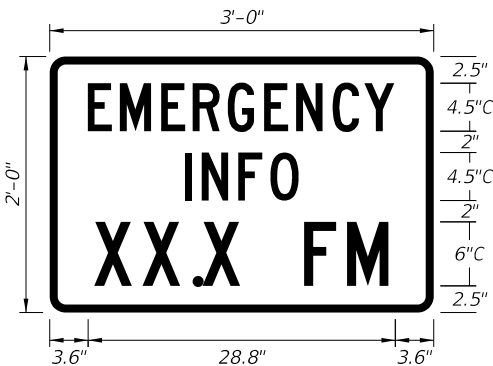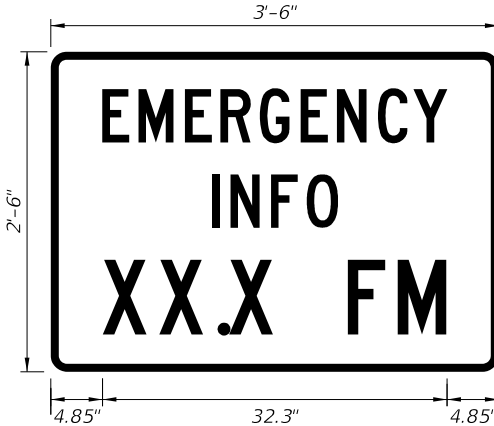Blue Background
White Legend and Border


<div><div>NON-LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-418-25</div><div>3'-0" X 2'-0"</div><div>1.5" Radii 3/4" Border</div></div></div>		<div><div>LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-418A-25</div><div>6'-6" X 4'-0"</div><div>3" Radii 3/4" Border</div></div></div>		<div><div>NON-LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-419-25</div><div>3'-0" X 2'-0"</div><div>1.5" Radii 3/4" Border</div></div></div>		<div><div>LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-419A-25</div><div>6'-6" X 4'-0"</div><div>3" Radii 3/4" Border</div></div></div>	
<div><div>NON-LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-420-25</div><div>3'-0" X 2'-0"</div><div>1.5" Radii 3/4" Border</div></div></div>		<div><div>LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-420A-25</div><div>6'-6" X 4'-0"</div><div>3" Radii 3/4" Border</div></div></div>		<div><div>NON-LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-421-25</div><div>3'-0" X 2'-6"</div><div>1.5" Radii 3/4" Border</div></div></div>		<div><div>LIMITED ACCESS</div><div></div><div><div>NOTE:</div><div>Design Project Manager or Transit Administrator will supply correct 1-8XX number.</div></div><div><div>FTP-421A-25</div><div>6'-0" X 3'-6"</div><div>1.5" Radii 3/4" Border</div></div></div>	
<div><div></div><div><div>FTP-421B-25</div><div>12'-0" X 6'-0"</div><div>9" Radii 1.5" Border</div></div></div>		<div><div></div><div><div>FTP-422-25</div><div>2'-0" X 1'-6"</div><div>1.5" Radii 3/4" Border</div></div></div>		<div><div></div><div><div>FTP-422A-25</div><div>3'-0" X 2'-0"</div><div>1.5" Radii 3/4" Border</div></div></div>		<div><div></div><div><div>FTP-422B-25</div><div>3'-6" X 2'-6"</div><div>1.5" Radii 3/4" Border</div></div></div>	
<div><div>LAST REVISION</div><div>11/01/26</div></div>		<div><div>DESCRIPTION:</div><div><div></div><div>FY 2027-28 STANDARD PLANS</div></div></div>		<div><div>SPECIAL SIGN DETAILS</div></div>		<div><div>INDEX</div><div>700-102</div></div>	<div><div>SHEET</div><div>12 of 29</div></div>

12:13:15 PM

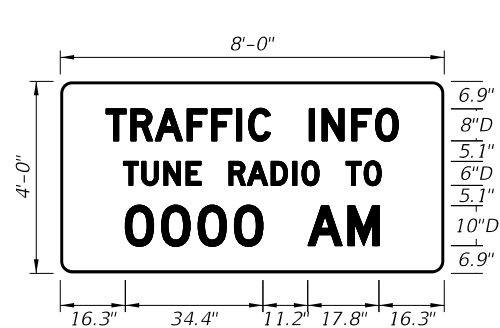9/28/2026













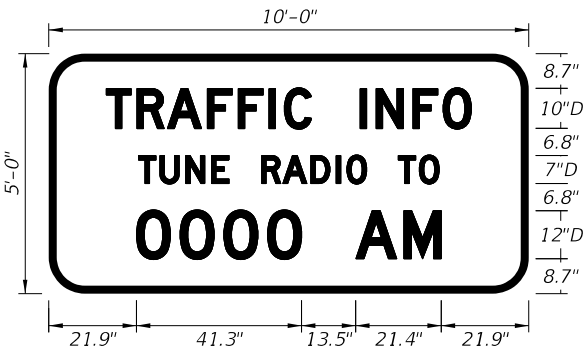FTP-423-25
8'-0" X 4'-0"
3" Radii $\frac{3}{4}$ " Border
6", 8" and 10" Series D Legend
Blue Background
White Legend and Border










FTP-423A-25
10'-0" X 5'-0"
9" Radii 2" Border
7", 10" and 12" Series D Legend
Blue Background
White Legend and Border

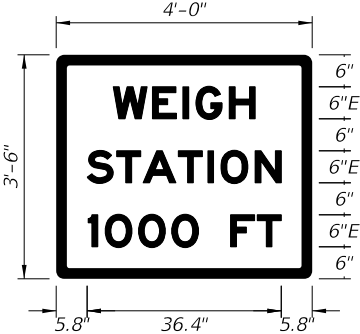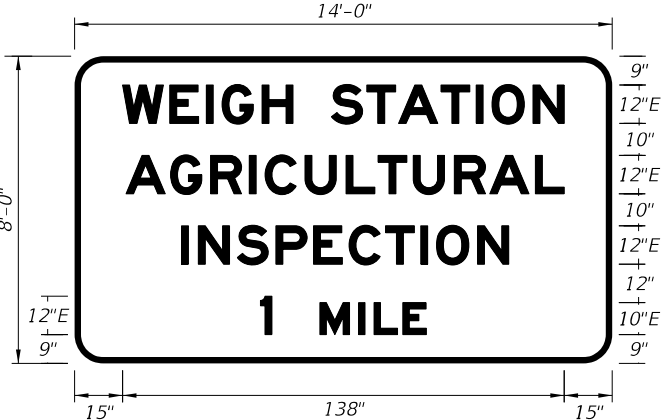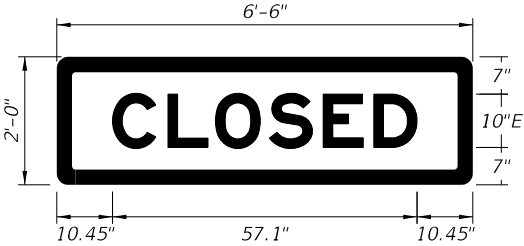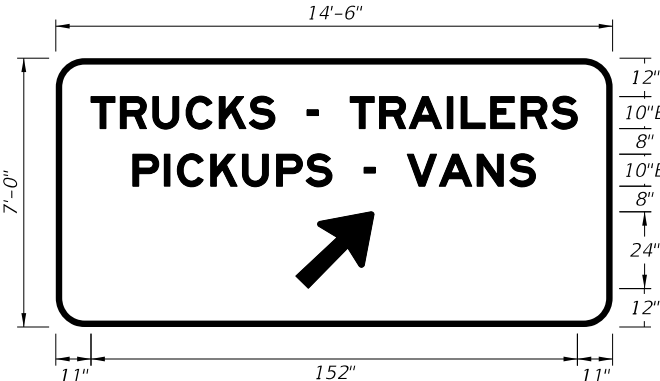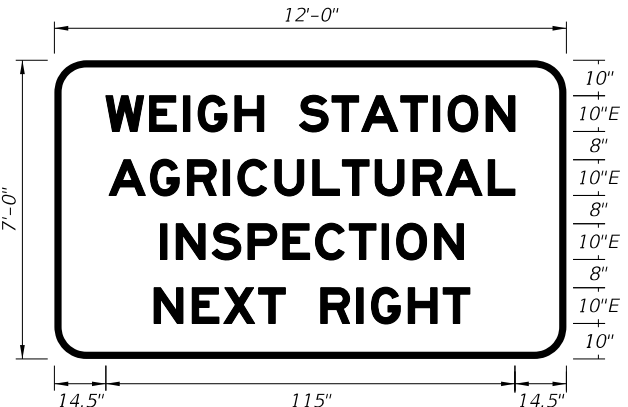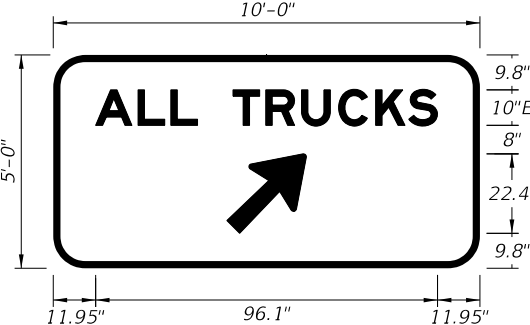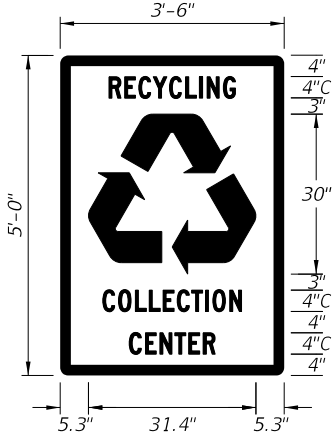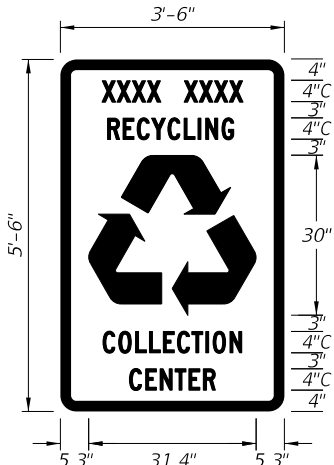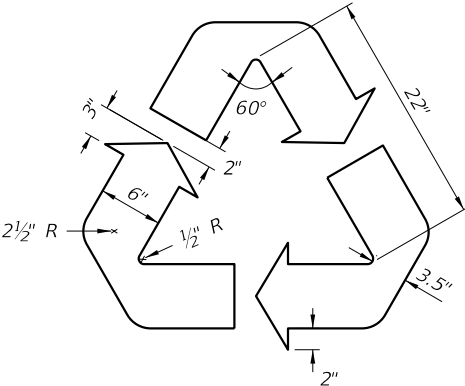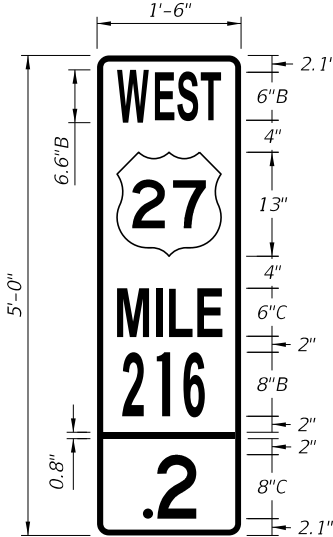9/28/2026 12:13:18 PM

OTHER THAN FREEWAY USE			OTHER THAN FREEWAY USE		FREEWAY USE
					
FTP-600-25 4'-0" X 3'-6" 1.5" Radii 2" Border		6" Series E Legend Green Background White Legend and Border	FTP-601-25 14'-0" X 8'-0" 9" Radii 2" Border	10" and 12" Series E Legend Green Background White Legend and Border	FTP-602A-25 6'-6" X 2'-0" 1.5" Radii 2" Border
NOTE: FTP-602-25 to be used with FTP-600-25			NOTE: FTP-602A-25 to be used with FTP-604R-25		
					
FTP-603R-25 FTP-603L-25 14'-6" X 7'-0" 9" Radii 2" Border		10" Series E Legend Green Background White Legend and Border	FTP-604R-25 FTP-604L-25 12'-0" X 7'-0" 9" Radii 2" Border	10" Series E Legend Green Background White Legend and Border	FTP-605R-25 FTP-605L-25 10'-0" X 5'-0" 9" Radii 2" Border
NOTE: Use FTP-603L-25 for "LEFT ARROW".			NOTE: Use FTP-604L-25 for "NEXT LEFT".		NOTE: Use FTP-605L-25 for LEFT ARROW.
					
FTP-607-25 3'-6" X 5'-0" 1.5" Radii 2" Border		4" Series C Legend Green Background White Legend, Border and Symbol	FTP-608-25 3'-6" X 5'-6" 3" Radii 2" Border	4" Series C Legend Green Background Municipality Name Optional White Legend, Border and Symbol	Detail for FTP-607-25 and FTP-608-25
			TOP: 6" and 6.6" and 8" Series B Legend 6" Series C Legend Green Background White Legend and Border BOTTOM: 8" Series C Legend Green Background White Legend and Border		
FTP-609-25 1'-6" X 5'-0" 1.5" Radii 3/4" Border					
LAST REVISION 11/01/26	REVISION	DESCRIPTION:	FDOT FY 2027-28 STANDARD PLANS		SPECIAL SIGN DETAILS
				INDEX 700-102	SHEET 14 of 29

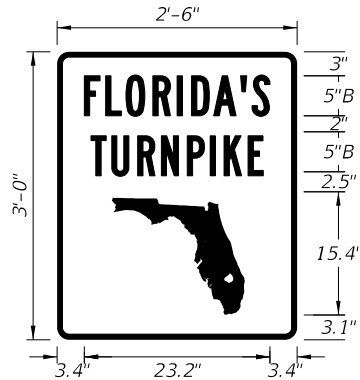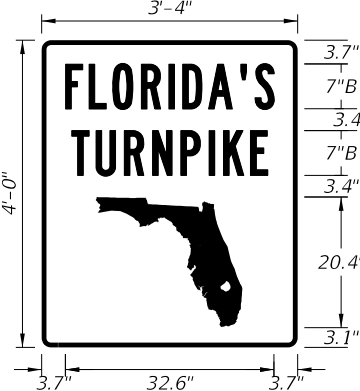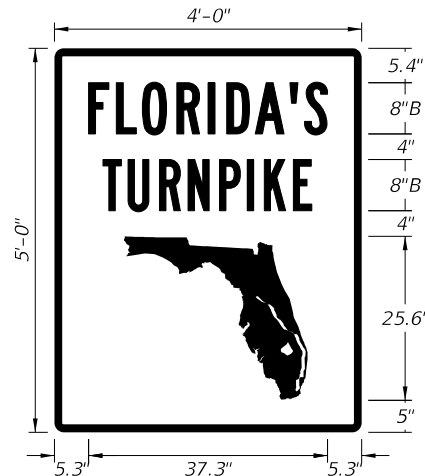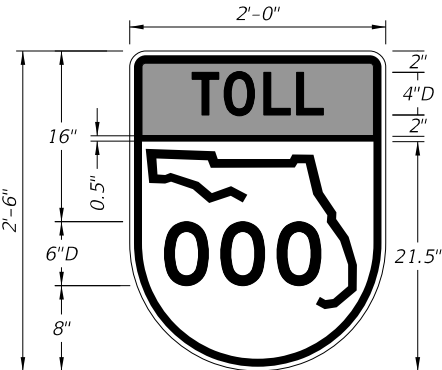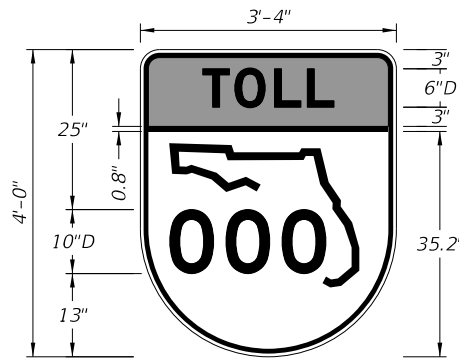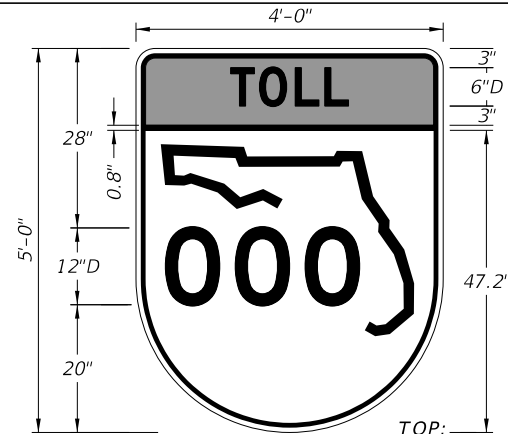9/28/2026 12:13:20 PM


 <p>FTP-610-25 2'-6" X 3'-0" 1.5" Radii $\frac{3}{4}$" Border</p> <p>5" Series B Legend Green Background White Legend, Border, and Florida Symbol</p>		 <p>FTP-610A-25 3'-4" X 4'-0" 1.5" Radii $\frac{3}{4}$" Border</p> <p>7" Series B Legned Green Background White Legend, Border, and Florida Symbol</p>		 <p>FTP-610B-25 4'-0" X 5'-0" 3" Radii $1\frac{1}{4}$" Border</p> <p>8" Series B Legend Green Background White Legend, Border, and Florida Symbol</p>	
 <p>FTP-611-25 2'-0" X 2'-6" 1.5" Radii $\frac{3}{4}$" Border</p> <p>TOP: 4" Series D Legend Yellow Background Black Legend and Border BOTTOM: 6" Series D Legend White Background Black Legend and Border</p>		 <p>FTP-611A-25 3'-4" X 4'-0" 3" Radii $\frac{3}{4}$" Border</p> <p>TOP: 6" Series D Legend Yellow Background Black Legend and Border BOTTOM: 10" Series D Legend White Background Black Legend and Border</p>		 <p>FTP-611B-25 4'-0" X 5'-0" 3" Radii $\frac{3}{4}$" Border</p> <p>TOP: 6" Series D Legend Yellow Background Black Legend and Border BOTTOM: 12" Series D Legend White Background Black Legend and Border</p>	
<div> <div>LAST REVISION 11/01/26</div> <div>REVISION</div> </div>		<div> <div>DESCRIPTION:</div> <div> <div> <div>FDOT</div> <div>FY 2027-28 STANDARD PLANS</div> </div> </div> </div>		<div> <div>SPECIAL SIGN DETAILS</div> </div>	
				<div> <div>INDEX 700-102</div> </div>	<div> <div>SHEET 15 of 29</div> </div>

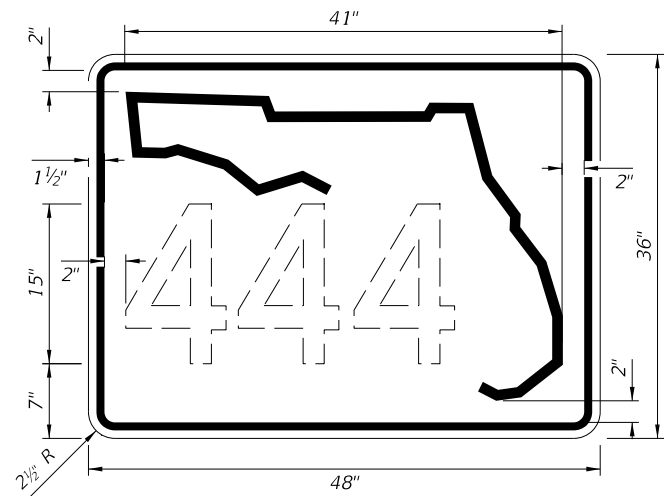


DIGITS	NUMERAL SIZE	SERIES LEGEND	PANEL SIZE
1-3	15"	C	48" x 36"
4	12"	C	48" x 36"

NOTE:
1. Stroke width of State Outline shall be 1".

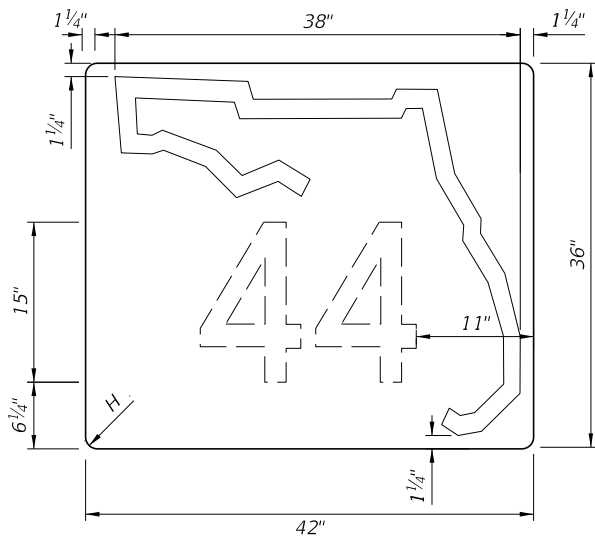INDEPENDENT USE FOR FREEWAY



1 OR 2 DIGITS

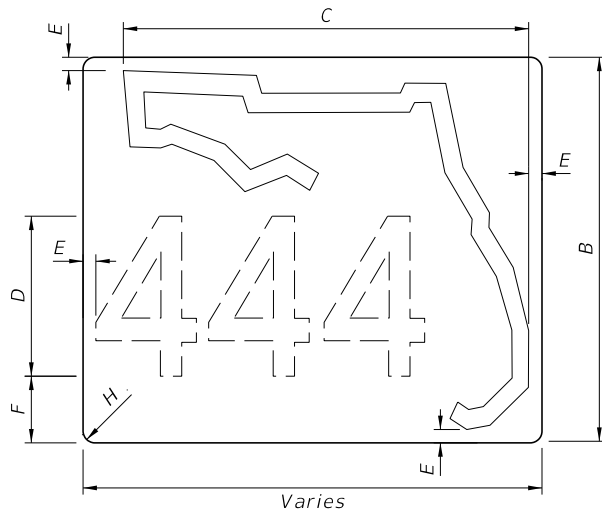


(See Note 4)
3 OR MORE DIGITS

NOTES:
1. Florida marker is Black Legend with White Background.
2. Stroke width of State outline is 1 3/4".
3. Series D Legend.
4. Width varies with the number scheme combination, within a range of 48"-58".


A	B	C	D	E	F	G	H
30"	24"	26"	12"	1 1/4"	2 3/4"	8 1/4"	1 1/4"
36"	30"	32"	15"	1 1/4"	3 1/4"	8 3/4"	1 1/4"
42"	36"	38"	15"	1 1/4"	6 1/4"	11"	1 1/4"

GUIDE SIGN USE

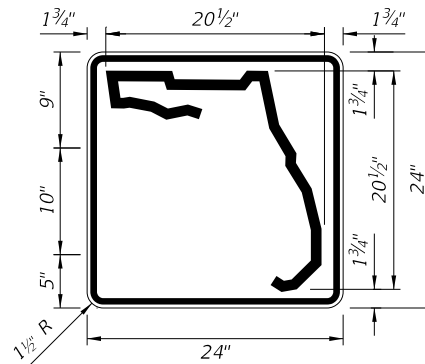FTP-612-25 - FLORIDA ROUTE MARKER



1 or 2 DIGITS

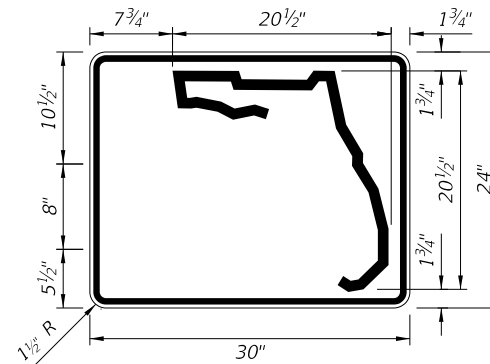

3 or 4 DIGITS


DIGITS	NUMERAL SIZE	SERIES LEGEND	PANEL SIZE
1-2	10"	D	24" x 24"

DIGITS	NUMERAL SIZE	SERIES LEGEND	PANEL SIZE
3	8"	D	30" x 24"
4	8"	C	30" x 24"

NOTES:
1. Stroke width of State Outline shall be 1".
2. The 24" X 24" panel shall only be used for a 3 digit route when the panel is to be used on a sign cluster with other 24" X 24" panels.

INDEPENDENT USE OTHER THAN FREEWAY






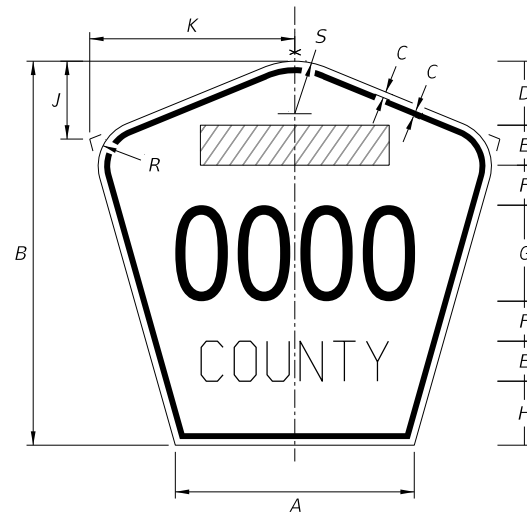
NOTES:
1. Series D Legend, all upper case.
2. Color: Yellow Legend and Border on Blue Background.
3. When used on a guide sign, marker must be overlaid on a square Yellow Background as shown in chart.
4. When two or more County Route Markers are mounted together, use the dimensions of the largest marker for all other markers.



SIGN	DIMENSIONS												Square Yellow Background Dimensions (See Note 3)
	A	B	C	D	E	F	G	H	J	K	R	S	
4 DIGIT POST MOUNTED	25 ¹ / ₈ "	42"	¾"	10"	4"	4"	8"	8"	8 ³ / ₈ "	22"	5"	8 ³ / ₄ "	
2 DIGIT OVERHEAD	21 ¹ / ₂ "	36"	½"	7 ¹ / ₂ "	3"	3"	12"	4 ¹ / ₂ "	7 ¹ / ₈ "	18 ⁷ / ₈ "	4 ¹ / ₄ "	7 ¹ / ₂ "	42" x 42"
3 DIGIT OVERHEAD	25 ¹ / ₈ "	42"	¾"	8"	4"	4"	12"	6"	8 ³ / ₈ "	22"	5"	8 ³ / ₄ "	48" x 48"
4 DIGIT OVERHEAD	29 ⁷ / ₈ "	48"	¾"	8"	5"	5"	12"	8"	9 ³ / ₄ "	25 ⁵ / ₈ "	5 ³ / ₄ "	10 ¹ / ₄ "	52" x 52"










FTP-613-25 - COUNTY ROUTE MARKER (M1-6)




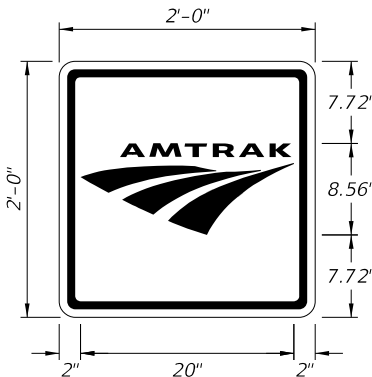
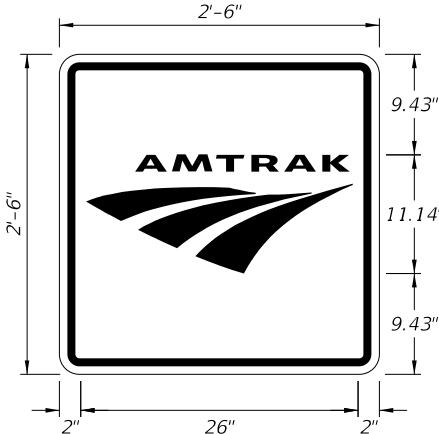
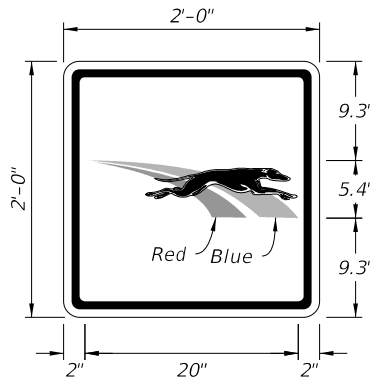
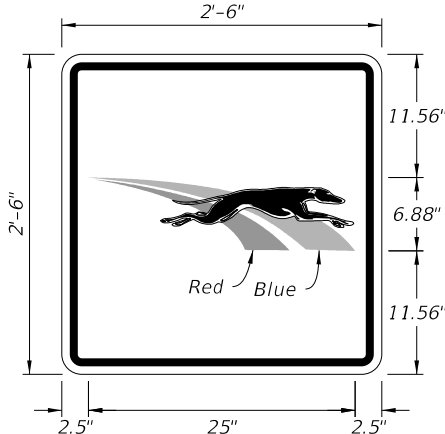
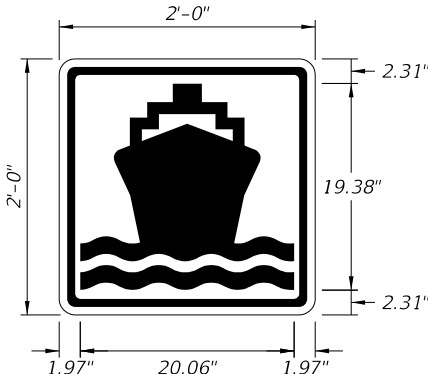
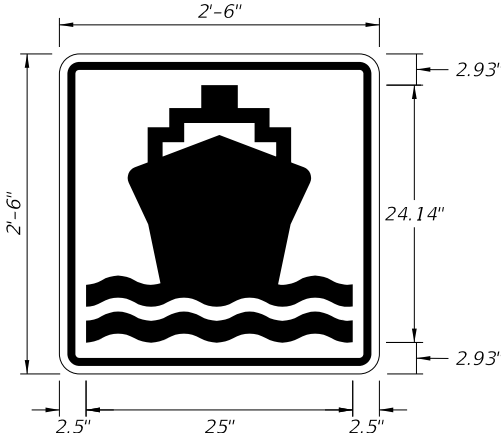
9/28/2026 12:13:26 PM

<div>NON-LIMITED ACCESS</div> <div></div> <div>FTP-614-25 2'-0" X 2'-0" 1.5" Radii 3/4" Border</div> <div>Green Background White Legend, Border and Symbol</div>		<div>LIMITED ACCESS</div> <div></div> <div>FTP-614A-25 2'-6" X 2'-6" 1.5" Radii 3/4" Border</div> <div>Green Background White Legend, Border and Symbol</div>		<div>NON-LIMITED ACCESS</div> <div></div> <div>FTP-615-25 2'-0" X 2'-0" 1.5" Radii 3/4" Border</div> <div>Green Background White Legend, Border and Symbol</div>		<div>LIMITED ACCESS</div> <div></div> <div>FTP-615A-25 2'-6" X 2'-6" 1.5" Radii 3/4" Border</div> <div>Green Background White Legend, Border and Symbol</div>			
<div>NON-LIMITED ACCESS</div> <div></div> <div>FTP-616-25 2'-0" X 2'-0" 1.5" Radii 3/4" Border</div> <div>Green Background White Legend, Border and Symbol</div>		<div>LIMITED ACCESS</div> <div></div> <div>FTP-616A-25 2'-6" X 2'-6" 1.5" Radii 3/4" Border</div> <div>Green Background White Legend, Border and Symbol</div>							
<div>LAST REVISION 11/01/26</div>		<div>DESCRIPTION:</div>		<div> FY 2027-28 STANDARD PLANS</div>		<div>SPECIAL SIGN DETAILS</div>		<div>INDEX 700-102</div>	<div>SHEET 17 of 29</div>


<div></div> <div><div>FTP-800-25</div><div>4'-6" X 2'-0"</div><div>1.5" Radii 1/2" Border</div></div> <div><div>5" Series B Legend</div><div>2" Series C Legned</div><div>Brown Background</div><div>Yellow Legend and Border</div></div>	<div></div> <div><div>FTP-800A-25</div><div>4'-6" X 2'-6"</div><div>1.5" Radii 1/2" Border</div></div> <div><div>5" Series B Legend</div><div>2" Series C Legned</div><div>Brown Background</div><div>Yellow Legend and Border</div></div>	<div></div> <div><div>FTP-801-25</div><div>4'-0" X 2'-6"</div><div>1.5" Radii 3/4" Border</div></div> <div><div>4" Series C Legend</div><div>2" Series EM Legend</div><div>White Background</div><div>Blue Legend and Border</div></div>	<div></div> <div><div>NOTE:</div><div>To be installed with Co-location of route Confirmation Marker</div></div> <div><div>FTP-802-25</div><div>2'-0" X 1'-4"</div></div>
<div></div> <div><div>NOTE:</div><div>Install at the Florida Scenic Highway Entrance Points</div></div> <div><div>FTP-802A-25</div><div>3'-0" X 2'-0"</div></div>			

LAST REVISION 11/01/26	DESCRIPTION:	<div><div></div><div>FY 2027-28 STANDARD PLANS</div></div>	SPECIAL SIGN DETAILS	INDEX 700-102	SHEET 18 of 29
---------------------------	--------------	--	----------------------	------------------	-------------------

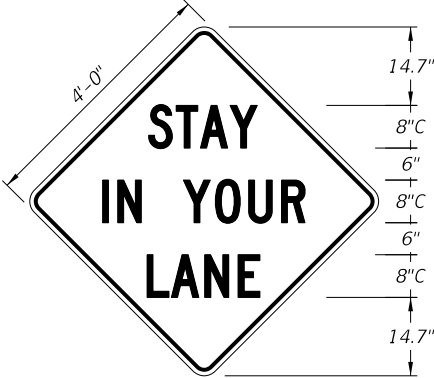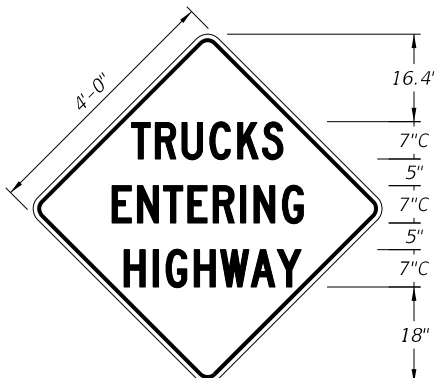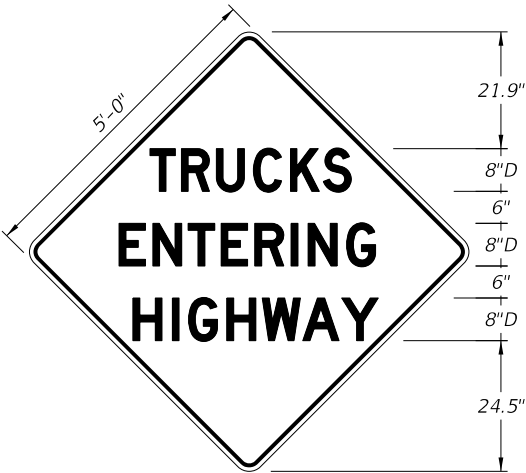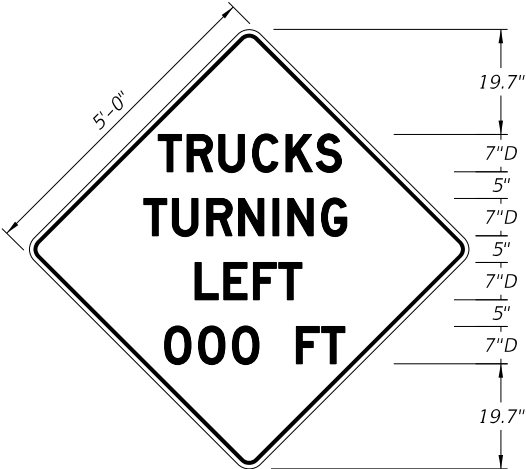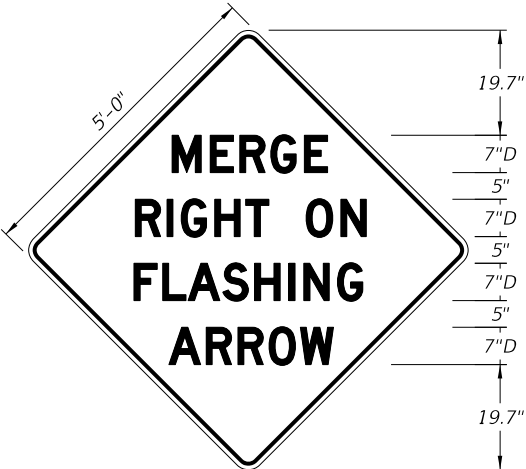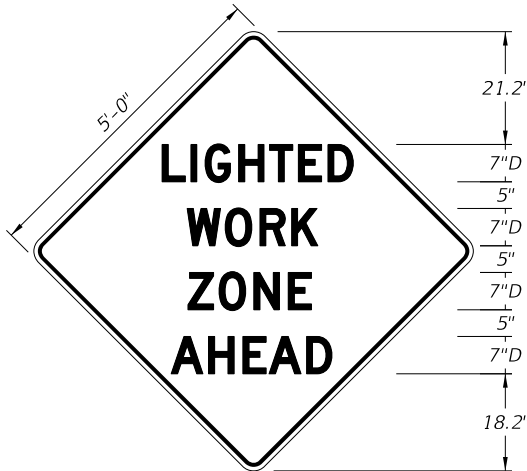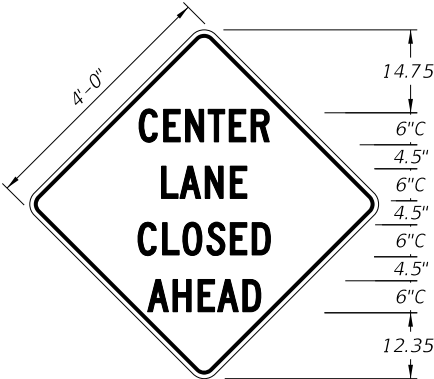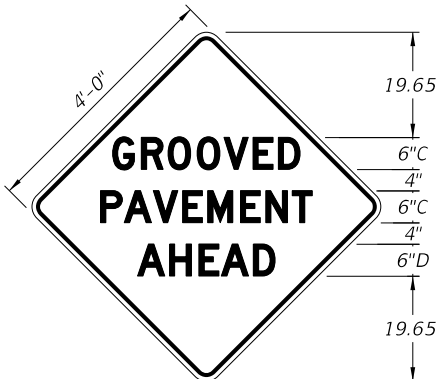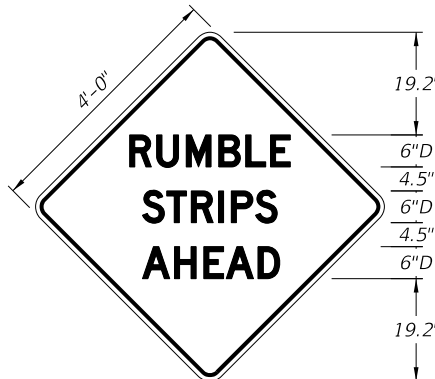
 <p>TTC-001-25 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>8" Series C Legend Orange Background Black Legend and Border</p>		 <p>TTC-002-25 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>8" Series C Legend Orange Background Black Legend and Border</p>		 <p>TTC-003-25 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>7" Series C Legend Orange Background Black Legend and Border</p>		 <p>TTC-003A-25 5'-0" X 5'-0" 3" Radii 3/4" Border</p> <p>8" Series D Legend Orange Background Black Legend and Border</p>	
 <p>TTC-004-25 5'-0" X 5'-0" 3" Radii 3/4" Border</p> <p>7" Series D Legend Orange Background Black Legend and Border</p>		 <p>TTC-005-25 5'-0" X 5'-0" 3" Radii 3/4" Border</p> <p>7" Series D Legend Orange Background Black Legend and Border</p>		 <p>TTC-006-25 5'-0" X 5'-0" 3" Radii 3/4" Border</p> <p>7" Series D Legend Orange Background Black Legend and Border</p>		 <p>TTC-007-25 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>7" Series C Legend Orange Background Black Legend and Border</p>	
 <p>TTC-008-25 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>6" Series C Legend Orange Background Black Legend and Border</p>		 <p>TTC-009-25 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>6" Series D Legend Orange Background Black Legend and Border</p>		 <p>TTC-010-25 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>6" Series D Legend Orange Background Black Legend and Border</p>			
<div> <div>LAST REVISION</div> <div>11/01/26</div> </div> <div>REVISION</div>		<div>DESCRIPTION:</div> <div> <div> <div>FDOT</div> <div>FY 2027-28</div> <div>STANDARD PLANS</div> </div> </div>		<div>SPECIAL SIGN DETAILS</div>		<div>INDEX</div> <div>700-102</div>	<div>SHEET</div> <div>19 of 29</div>
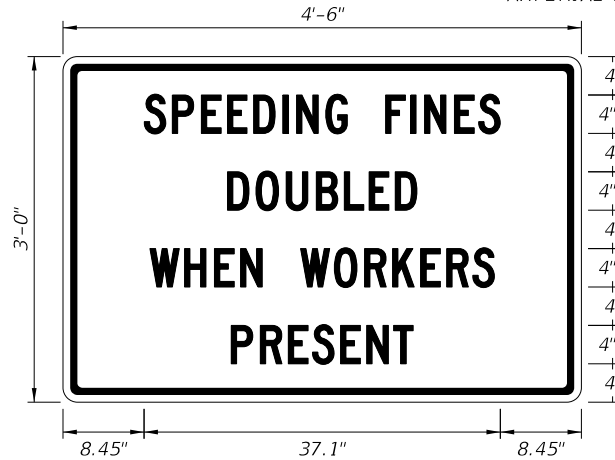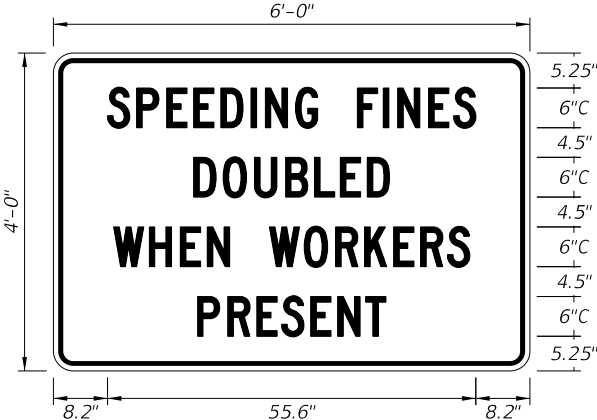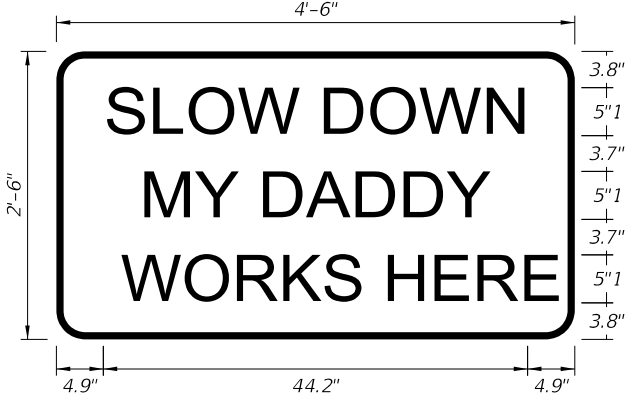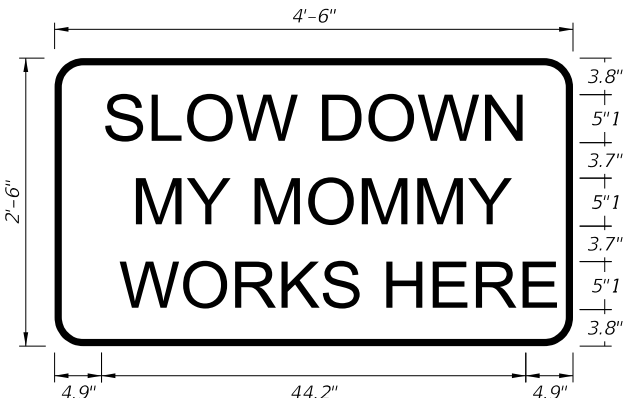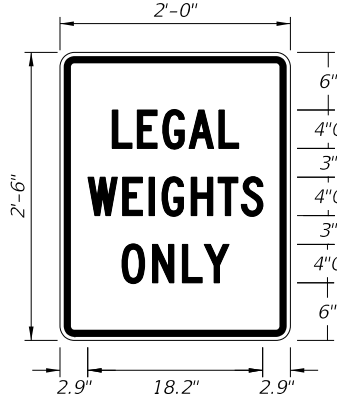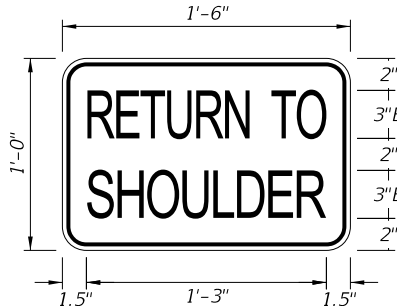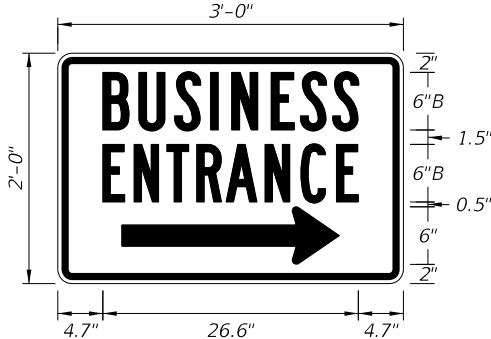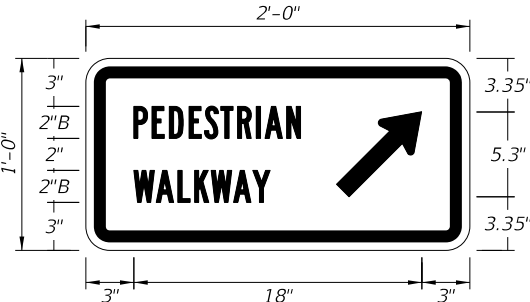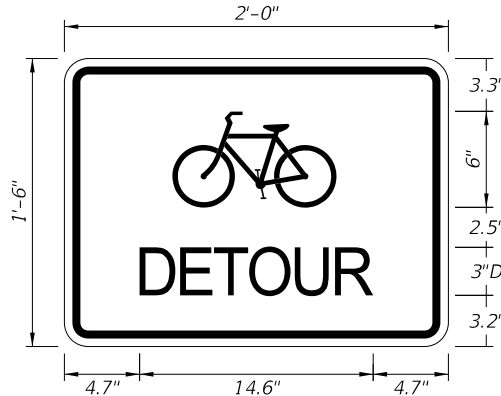
<div><p><i>ARTERIAL SIGN</i></p></div> <div><p><i>TTC-011-25</i> 4'-6" X 3'-0" 1.5" Radii 3/4" Border</p><p>4" Series C Legend White Background Black Legend and Border</p></div>		<div><p><i>FREEWAY SIGN</i></p></div> <div><p><i>TTC-011A-25</i> 6'-0" X 4'-0" 3" Radii 3/4" Border</p><p>6" Series C Legend White Background Black Legend and Border</p></div>		<div><p><i>5" Kids Series Legend</i> <i>Orange Background</i> <i>Black Legend and Border</i></p></div> <div><p><i>TTC-012-25</i> 4'-6" X 2'-6" 3" Radii 3/4" Border</p><p>5" Kids Series Legend Orange Background Black Legend and Border</p></div>		<div><p><i>5" Kids Series Legend</i> <i>Orange Background</i> <i>Black Legend and Border</i></p></div> <div><p><i>TTC-013-25</i> 4'-6" X 2'-6" 3" Radii 3/4" Border</p><p>5" Kids Series Legend Orange Background Black Legend and Border</p></div>		
<div><p><i>4" Series C Legend</i> <i>White Background</i> <i>Red Legend and Border</i></p></div> <div><p><i>TTC-014-25</i> 2'-0" X 2'-6" 1.5" Radii 3/4" Border</p><p>4" Series C Legend White Background Red Legend and Border</p></div>		<div><p><i>3" Series B Legend</i> <i>Orange Background</i> <i>Black Legend and Border</i></p></div> <div><p><i>TTC-015-25</i> 1'-6" X 1'-0" 1.5" Radii 1/4" Border</p><p>3" Series B Legend Orange Background Black Legend and Border</p></div>		<div><p><i>6" Series B Legend</i> <i>Blue Background</i> <i>White Legend and Border</i></p><p><i>NOTE:</i> Use TTC-016L-25 for "LEFT ARROW".</p></div> <div><p><i>TTC-016R-25</i> <i>TTC-016L-25</i> 3'-0" X 2'-0" 1.5" Radii 3/4" Border</p><p>6" Series B Legend Blue Background White Legend and Border</p></div>		<div><p><i>2" Series B Legend</i> <i>White Background</i> <i>Black Legend and Border</i></p><p><i>NOTE:</i> Use TTC-017L-25 for "LEFT ARROW".</p></div> <div><p><i>TTC-017R-25</i> <i>TTC-017L-25</i> 2'-0" X 1'-0" 1.5" Radii 3/4" Border</p><p>2" Series B Legend White Background Black Legend and Border</p></div>		
<div><p><i>3" Series D Legend</i> <i>Orange Background</i> <i>Black Legend and Border</i></p></div> <div><p><i>TTC-018-25</i> 2'-0" X 1'-6" 1.5" Radii 1/2" Border</p><p>3" Series D Legend Orange Background Black Legend and Border</p></div>								
LAST REVISION 11/01/26	REVISION	DESCRIPTION:		 FY 2027-28 STANDARD PLANS	SPECIAL SIGN DETAILS		INDEX 700-102	SHEET 20 of 29

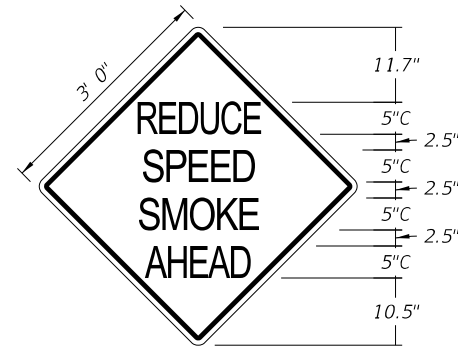
9/28/2026 12:13:39 PM



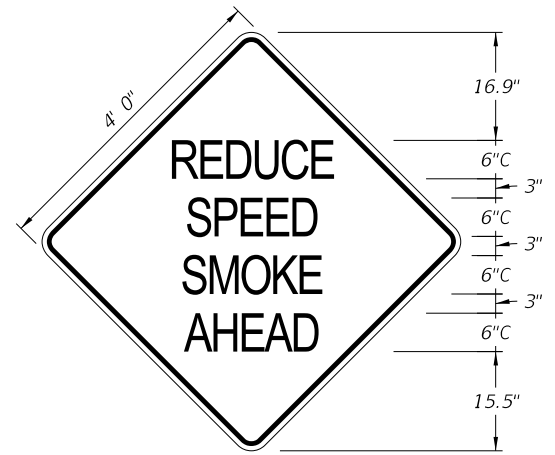
TTC-019-25
3'-0" x 3'-0"
1.5" Radii $\frac{3}{4}$ " Border
5" Series C Legend
Pink Background
Black Legend and Border



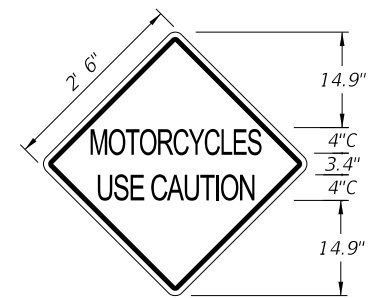
TTC-019A-25
4'-0" x 4'-0"
3" Radii $\frac{3}{4}$ " Border
6" Series C Legend
Pink Background
Black Legend and Border



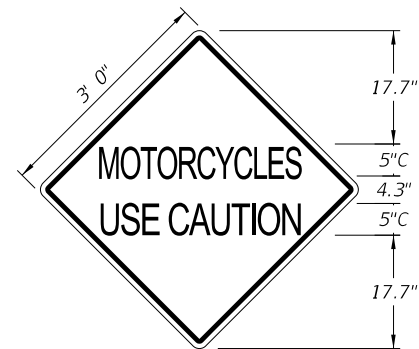TTC-020-25
2'-6" x 2'-6"
1.5" Radii $\frac{3}{4}$ " Border
4" Series C Legend
Pink Background
Black Legend and Border







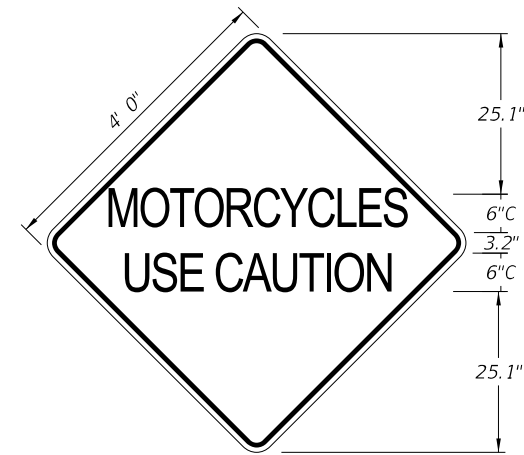TTC-020A-25
3'-0" x 3'-0"
1.5" Radii $\frac{3}{4}$ " Border
5" Series C Legend
Pink Background
Black Legend and Border















TTC-020B-25
4'-0" x 4'-0"
1.5" Radii $\frac{3}{4}$ " Border
6" Series C Legend
Pink Background
Black Legend and Border

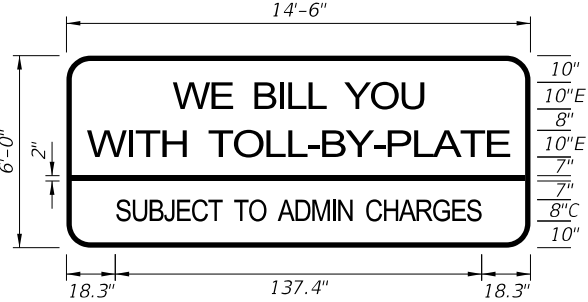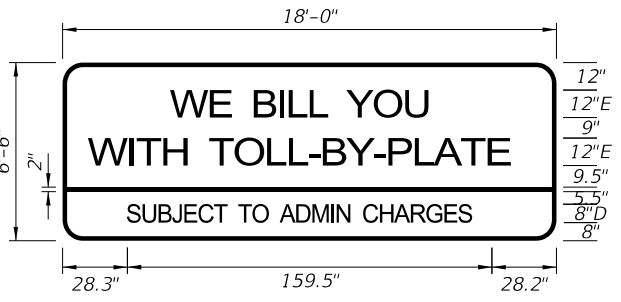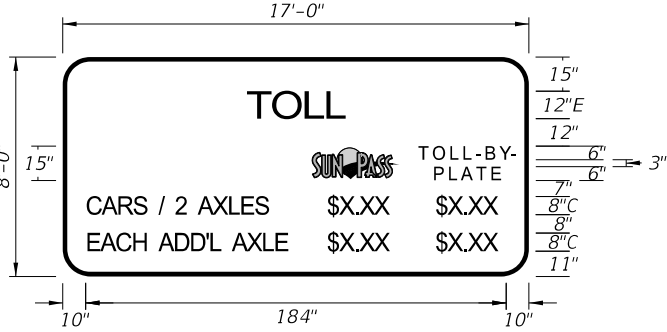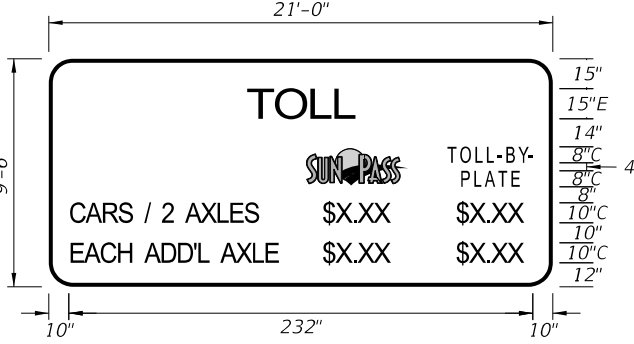9/28/2026 12:13:42 PM













RAMP APPLICATIONS		MAINLINE APPLICATIONS		RAMP APPLICATIONS		MAINLINE APPLICATIONS	
							
AET-001-26 14'-6" X 6'-0" 9" Radii 2" Border	8" Series C and 10" Series E Legend White Background Black Legend and Border	AET-001A-26 18'-0" X 6'-6" 9" Radii 2" Border	8" Series D and 12" Series E Legend White Background Black Legend and Border	AET-002-26 17'-0" X 8'-0" 12" Radii 2" Border	8" Series C and 12" Series E Legend White Background Black Legend and Border	AET-002A-26 21'-0" X 9'-6" 12" Radii 2" Border	8" and 10" Series C and 15" Series E Legend White Background Black Legend and Border

--	--	--	--	--	--	--	--

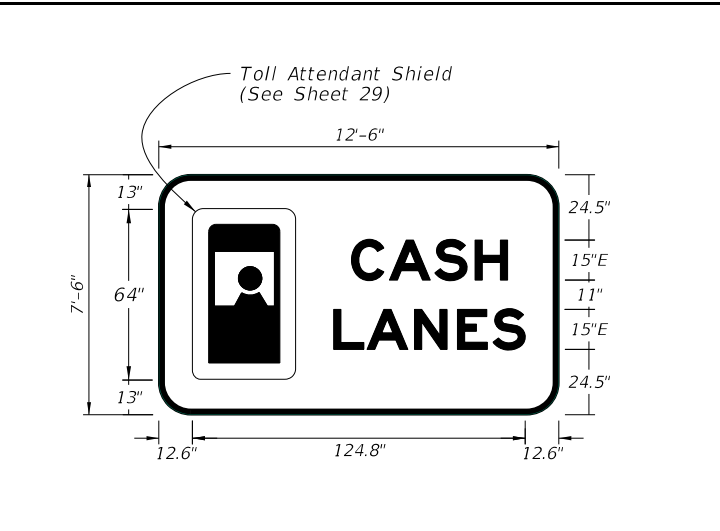
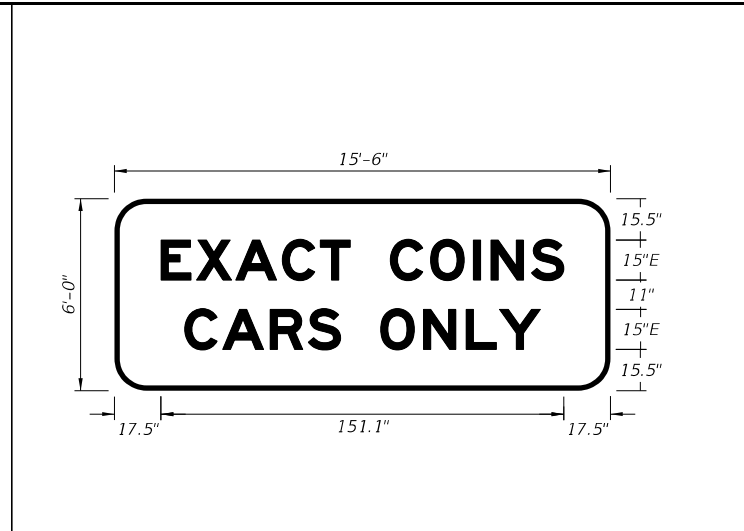
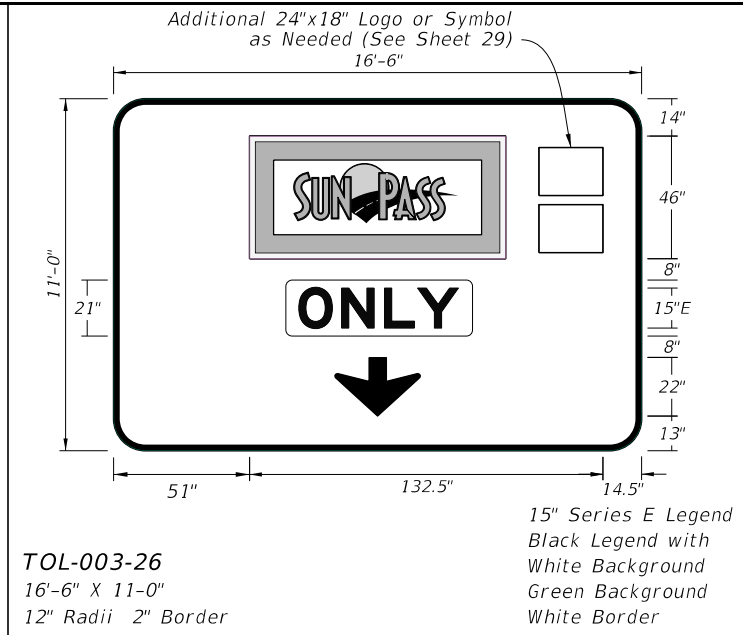
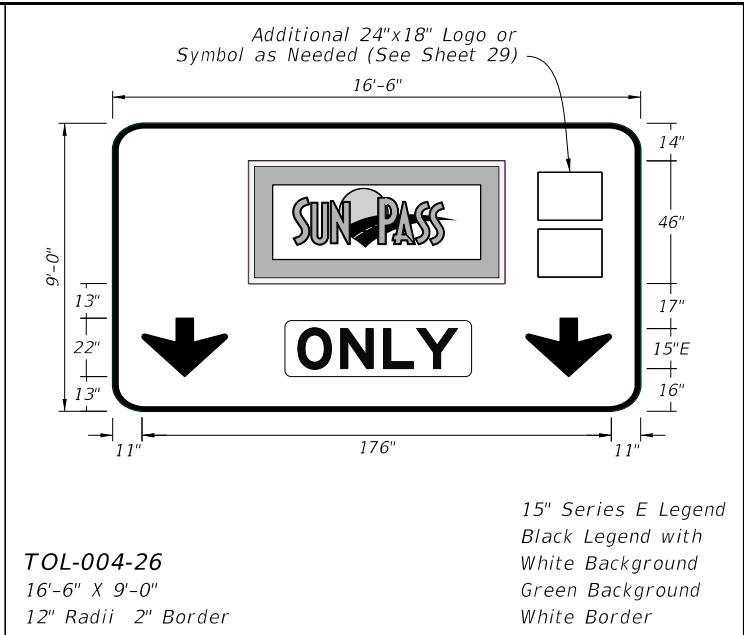
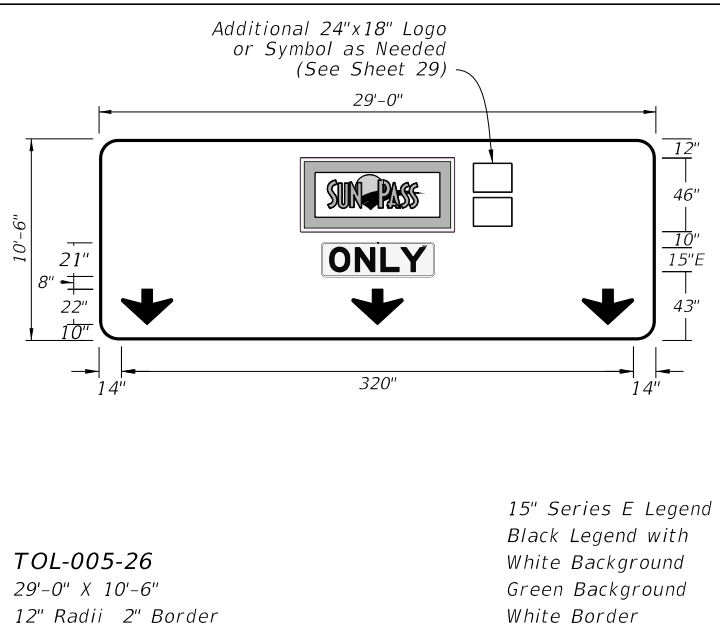
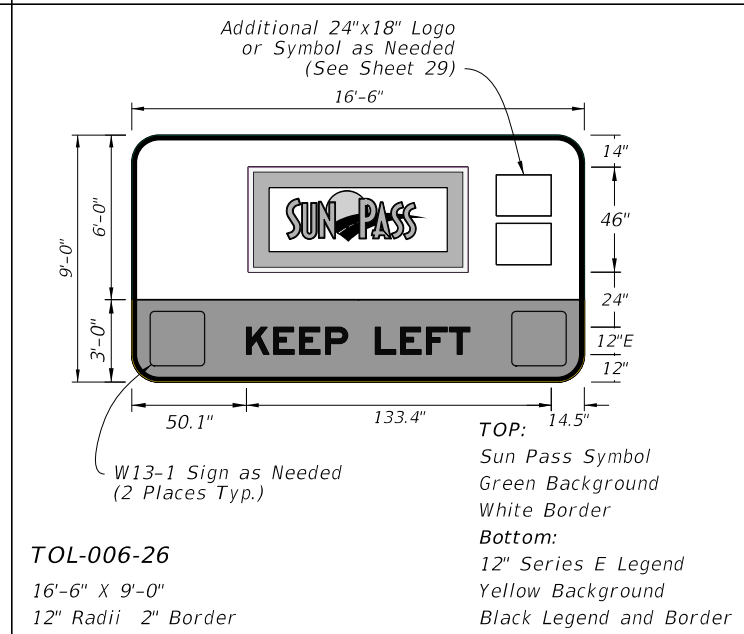
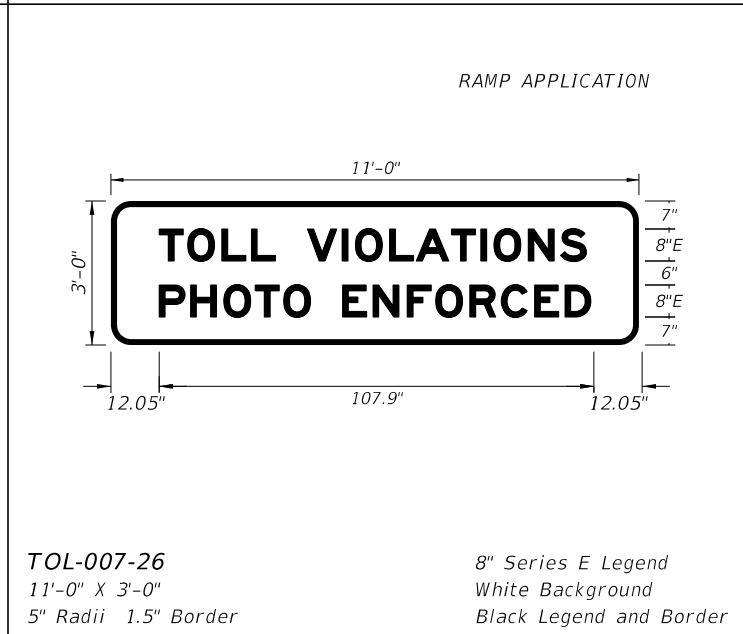
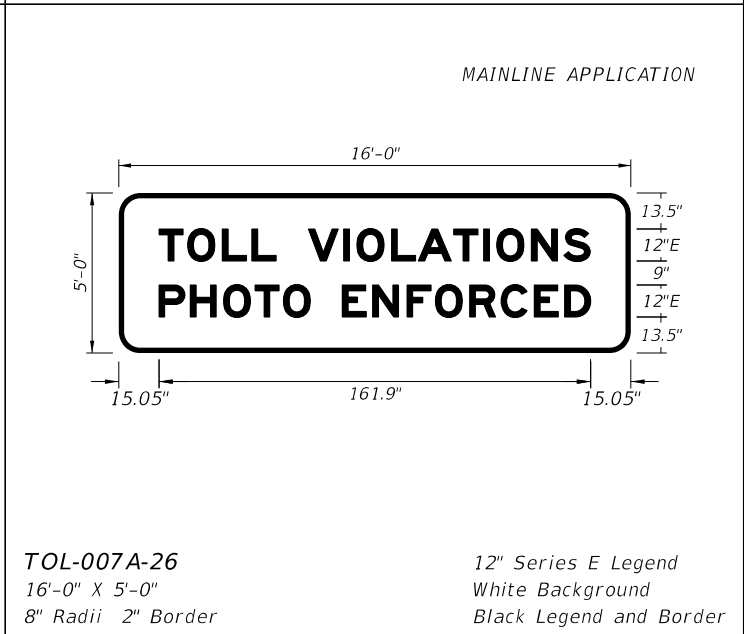
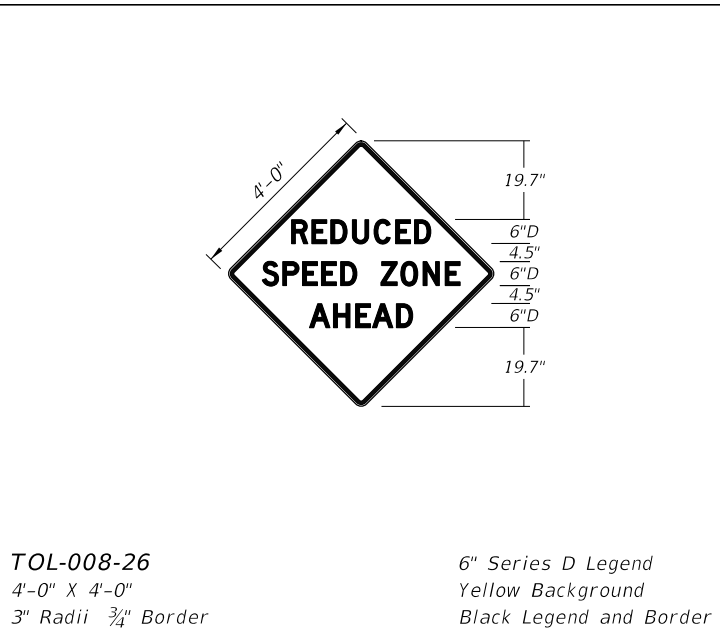
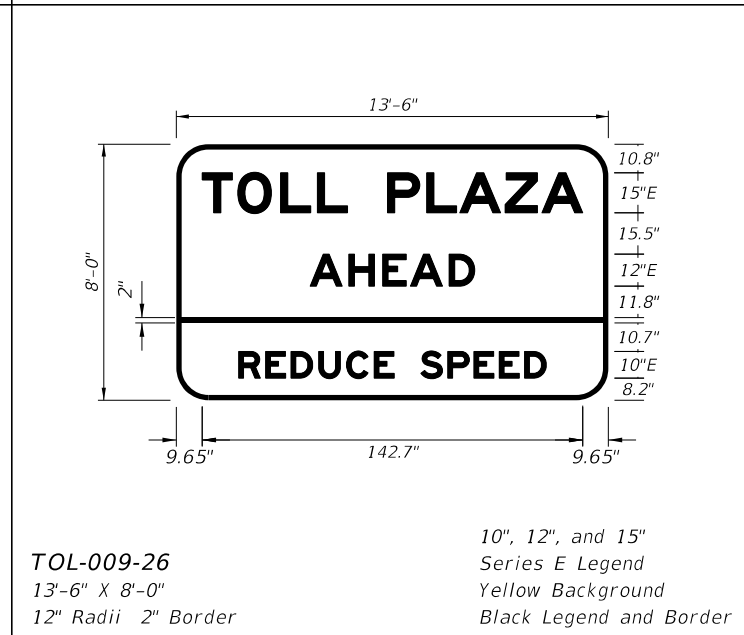
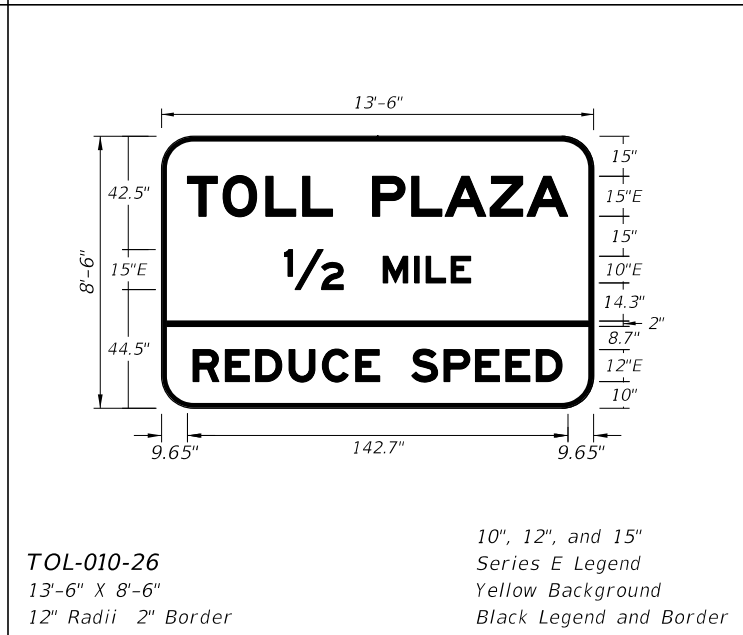
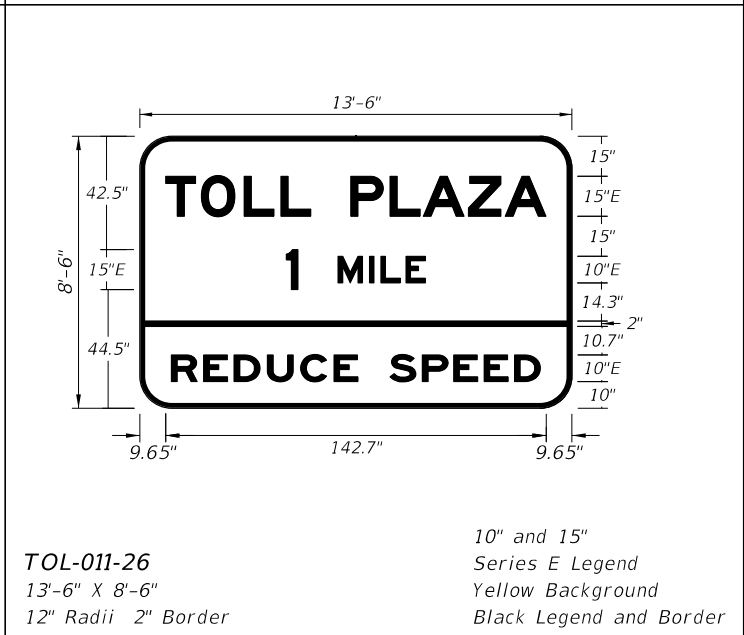
9/28/2026 12:13:45 PM

 <p>TOL-001-26 12'-6" X 7'-6" 12" Radii 2" Border</p> <p>15" Series E Legend Green Background White Legend and Border</p>		 <p>TOL-002-26 15'-6" X 6'-0" 12" Radii 2" Border</p> <p>15" Series E Legend Blue Background White Legend and Border</p>		 <p>TOL-003-26 16'-6" X 11'-0" 12" Radii 2" Border</p> <p>15" Series E Legend Black Legend with White Background Green Background White Border</p>		 <p>TOL-004-26 16'-6" X 9'-0" 12" Radii 2" Border</p> <p>15" Series E Legend Black Legend with White Background Green Background White Border</p>			
 <p>TOL-005-26 29'-0" X 10'-6" 12" Radii 2" Border</p> <p>15" Series E Legend Black Legend with White Background Green Background White Border</p>		 <p>TOL-006-26 16'-6" X 9'-0" 12" Radii 2" Border</p> <p>12" Series E Legend Yellow Background Black Legend and Border</p>		<p>RAMP APPLICATION</p>  <p>TOL-007-26 11'-0" X 3'-0" 5" Radii 1.5" Border</p> <p>8" Series E Legend White Background Black Legend and Border</p>		<p>MAINLINE APPLICATION</p>  <p>TOL-007A-26 16'-0" X 5'-0" 8" Radii 2" Border</p> <p>12" Series E Legend White Background Black Legend and Border</p>			
 <p>TOL-008-26 4'-0" X 4'-0" 3" Radii 3/4" Border</p> <p>6" Series D Legend Yellow Background Black Legend and Border</p>		 <p>TOL-009-26 13'-6" X 8'-0" 12" Radii 2" Border</p> <p>10", 12", and 15" Series E Legend Yellow Background Black Legend and Border</p>		 <p>TOL-010-26 13'-6" X 8'-6" 12" Radii 2" Border</p> <p>10", 12", and 15" Series E Legend Yellow Background Black Legend and Border</p>		 <p>TOL-011-26 13'-6" X 8'-6" 12" Radii 2" Border</p> <p>10" and 15" Series E Legend Yellow Background Black Legend and Border</p>			
LAST REVISION 11/01/26		DESCRIPTION:		FDOT FY 2027-28 STANDARD PLANS		SPECIAL SIGN DETAILS		INDEX 700-102	SHEET 23 of 29

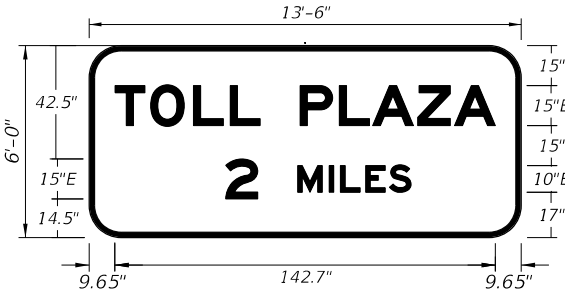
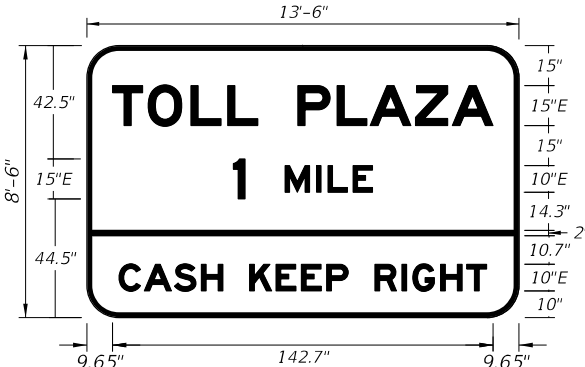
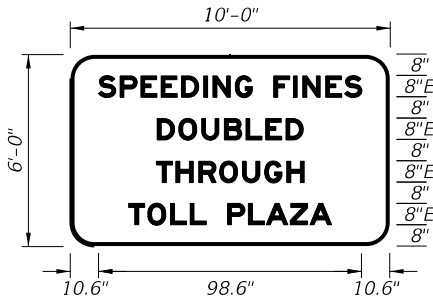

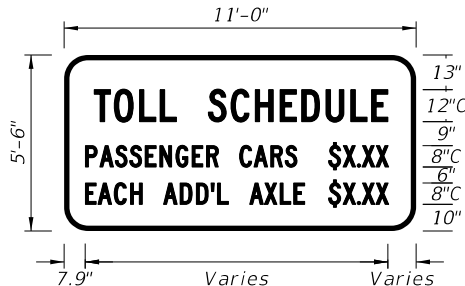
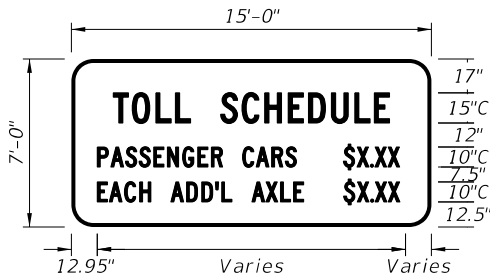
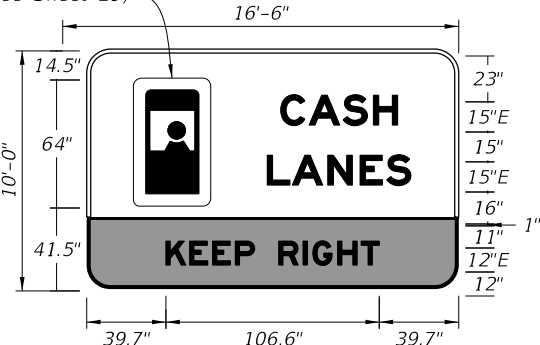
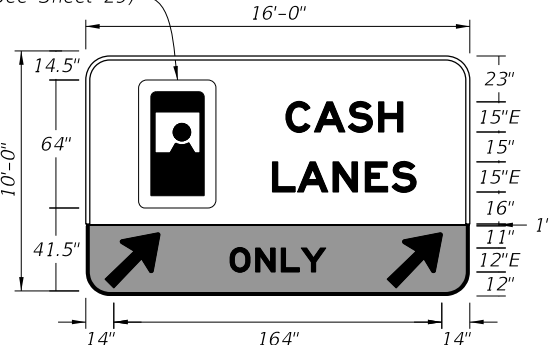
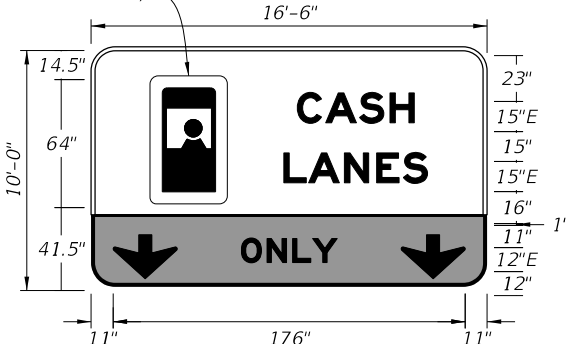
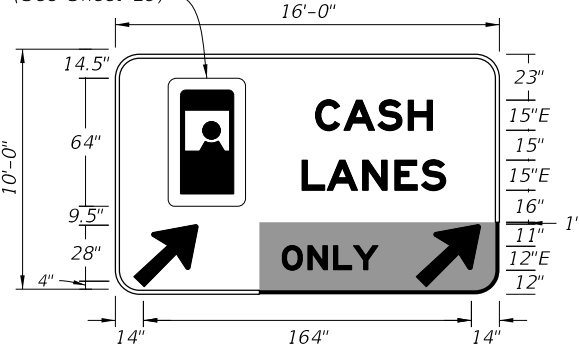
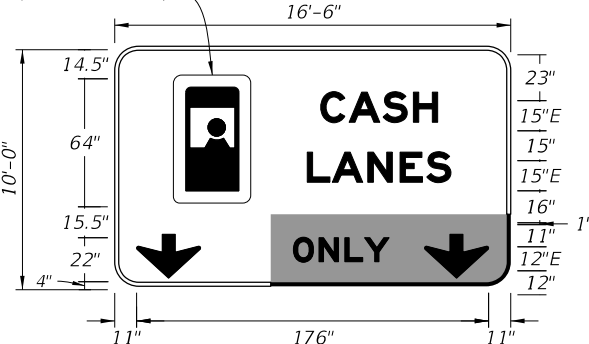
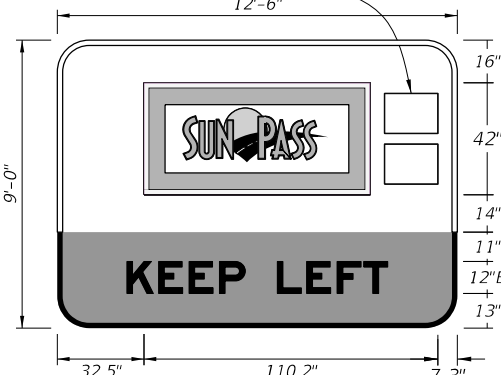
9/28/2026 12:13:47 PM












 <p>TOL-012-26 13'-6" X 6'-0" 9" Radii 2" Border</p> <p>10" and 15" Series E Legend Yellow Background Black Legend and Border</p>		 <p>TOL-013-26 13'-6" X 8'-6" 12" Radii 2" Border</p> <p>10" and 15" Series E Legend Yellow Background Black Legend and Border</p>		<p>MAINLINE AND RAMP USE</p>  <p>TOL-014-26 10'-0" X 6'-0" 9" Radii 1.5" Border</p> <p>8" Series E Legend White Background Black Legend and Border</p>		 <p>TOL-015-26 4'-0" X 5'-0" 6" Radii 1.5" Border</p> <p>8" Series D Legend Yellow Background Black Legend and Border</p>		
<p>USE ON RAMP</p>  <p>TOL-016-26 11'-0" X 5'-6" 9" Radii 2" Border</p> <p>8" and 12" Series C Legend White Background Black Legend and Border</p>		<p>MAINLINE USE</p>  <p>TOL-016A-26 15'-0" X 7'-0" 11" Radii 2" Border</p> <p>10" and 15" Series C Legend White Background Black Legend and Border</p>		<p>Toll Attendant Shield (See Sheet 29)</p>  <p>TOL-017-26 15'-6" X 10'-0" 12" Radii 2" Border</p> <p>TOP: 15" Series E Legend Green Background White Legend and Border BOTTOM: 12" Series E Legend Yellow Background Black Legend and Border</p>		<p>Toll Attendant Shield (See Sheet 29)</p>  <p>TOL-018-26 16'-0" X 10'-0" 12" Radii 2" Border</p> <p>TOP: 15" Series E Legend Green Background White Legend and Border BOTTOM: 12" Series E Legend Yellow Background Black Legend and Border</p>		
<p>Toll Attendant Shield (See Sheet 29)</p>  <p>TOL-018A-26 16'-6" X 10'-0" 12" Radii 2" Border</p> <p>TOP: 15" Series E Legend Green Background White Legend and Border BOTTOM: 12" Series E Legend Yellow Background Black Legend and Border</p>		<p>Toll Attendant Shield (See Sheet 29)</p>  <p>TOL-019-26 16'-0" X 10'-0" 12" Radii 2" Border</p> <p>TOP: 15" Series E Legend Green Background White Legend and Border BOTTOM RIGHT: 12" Series E Legend Yellow Background Black Legend and Border</p>		<p>Toll Attendant Shield (See Sheet 29)</p>  <p>TOL-019A-26 16'-6" X 10'-0" 12" Radii 2" Border</p> <p>TOP: 15" Series E Legend Green Background White Legend and Border BOTTOM RIGHT: 12" Series E Legend Yellow Background Black Legend and Border</p>		<p>Additional 24"x18" Logo or Symbol as Needed (See Sheet 29)</p>  <p>TOL-020-26 12'-6" X 9'-0" 12" Radii 2" Border</p> <p>TOP: Sun Pass Symbol Green Background White Border BOTTOM: 12" Series E Legend Yellow Background Black Legend and Border</p>		
LAST REVISION 11/01/26	REVISION	DESCRIPTION:	 FY 2027-28 STANDARD PLANS	SPECIAL SIGN DETAILS			INDEX 700-102	SHEET 24 of 29

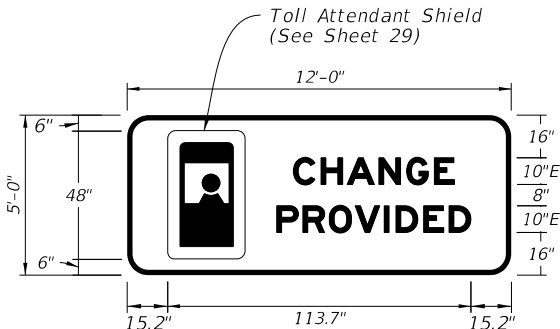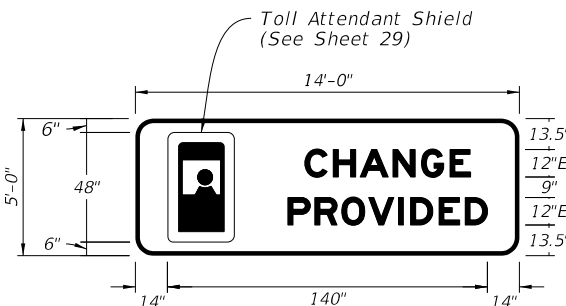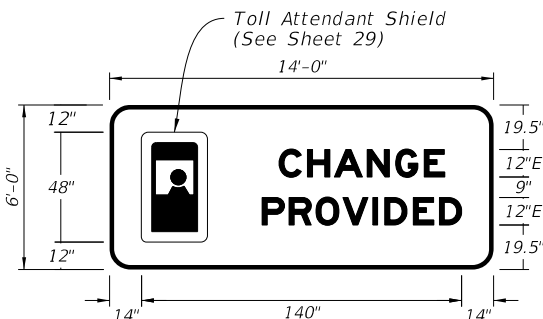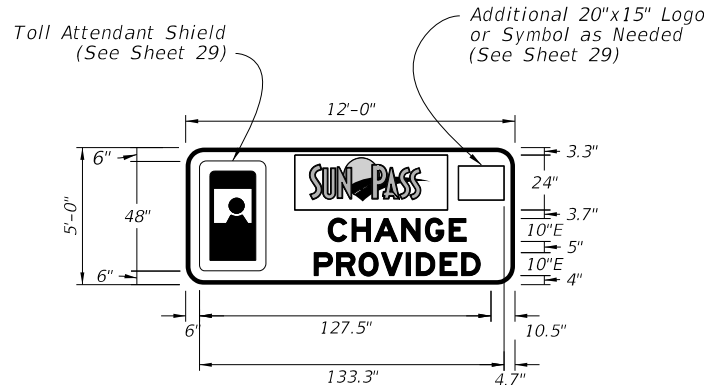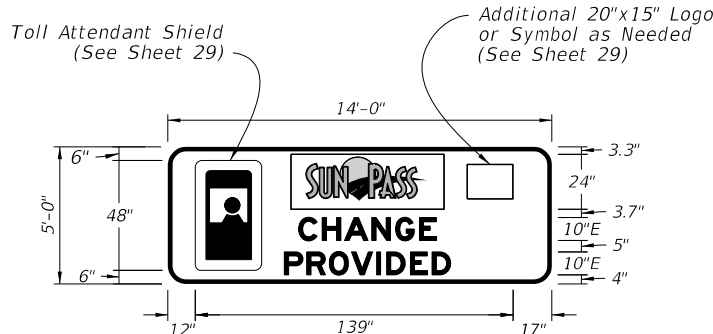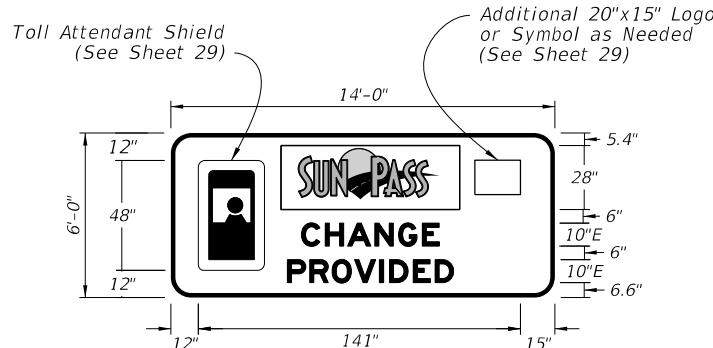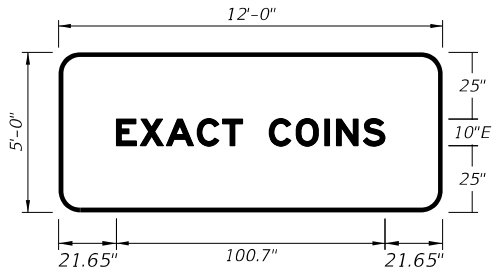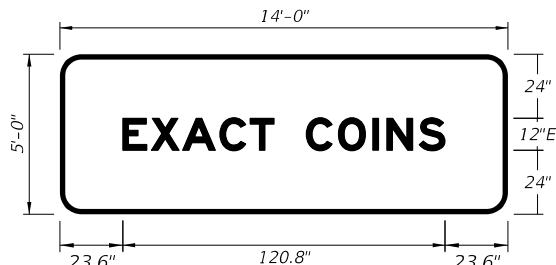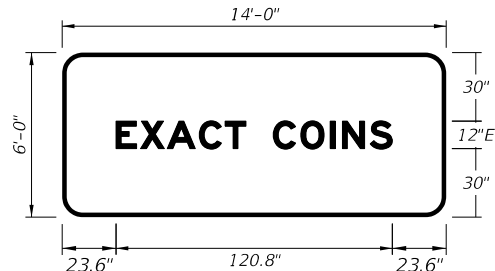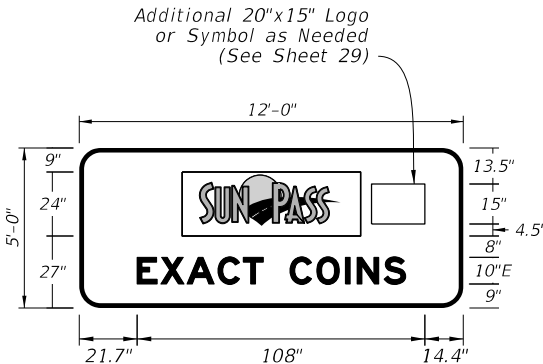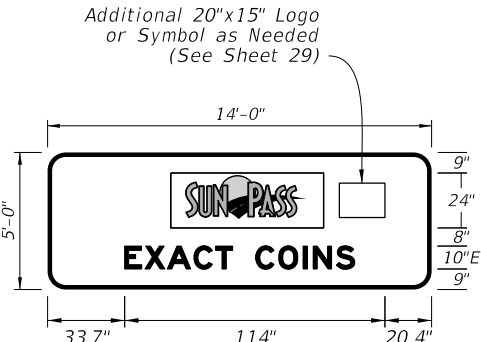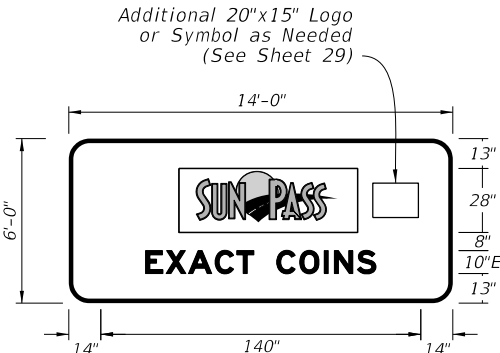9/28/2026 12:13:50 PM

 <p><i>Toll Attendant Shield (See Sheet 29)</i></p>		<p>TOL-021-26 12'-0" X 5'-0" 8" Radii 2" Border</p> <p>10" Series E Legend Green Background White Legend and Border</p>		 <p><i>Toll Attendant Shield (See Sheet 29)</i></p>		<p>TOL-021A-26 14'-0" X 5'-0" 8" Radii 2" Border</p> <p>12" Series E Legend Green Background White Legend and Border</p>		 <p><i>Toll Attendant Shield (See Sheet 29)</i></p>		<p>TOL-021B-26 14'-0" X 6'-0" 9" Radii 2" Border</p> <p>12" Series E Legend Green Background White Legend and Border</p>		 <p><i>Toll Attendant Shield (See Sheet 29)</i></p> <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-022-26 12'-0" X 5'-0" 8" Radii 1.75" Border</p> <p>10" Series E Legend Green Background White Legend and Border</p>	
 <p><i>Toll Attendant Shield (See Sheet 29)</i></p> <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-022A-26 14'-0" X 5'-0" 8" Radii 1.75" Border</p> <p>10" Series E Legend Green Background White Legend and Border</p>		 <p><i>Toll Attendant Shield (See Sheet 29)</i></p> <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-022B-26 14'-0" X 6'-0" 9" Radii 1.75 Border</p> <p>10" Series E Legend Green Background White Legend and Border</p>		 <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-023-26 12'-0" X 5'-0" 8" Radii 1.75" Border</p> <p>10" Series E Legend Blue Background White Legend and Border</p>		 <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-023A-26 14'-0" X 5'-0" 8" Radii 2" Border</p> <p>12" Series E Legend Blue Background White Legend and Border</p>	
 <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-023B-26 14'-0" X 6'-0" 9" Radii 2" Border</p> <p>12" Series E Legend Blue Background White Legend and Border</p>		 <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-024-26 12'-0" X 5'-0" 8" Radii 1.75" Border</p> <p>10" Series E Legend Green Background White Legend and Border</p>		 <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-024A-26 14'-0" X 5'-0" 8" Radii 1.75" Border</p> <p>10" Series E Legend Green Background White Legend and Border</p>		 <p><i>Additional 20"x15" Logo or Symbol as Needed (See Sheet 29)</i></p>		<p>TOL-024B-26 14'-0" X 6'-0" 9" Radii 1.75" Border</p> <p>10" Series E Legend Green Background White Legend and Border</p>	
LAST REVISION 11/01/26		DESCRIPTION:				FY 2027-28 STANDARD PLANS		SPECIAL SIGN DETAILS				INDEX 700-102		SHEET 25 of 29	

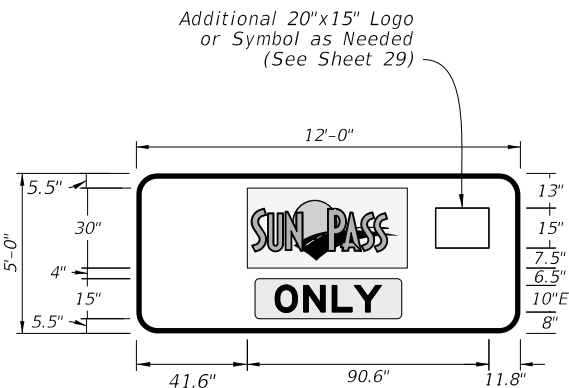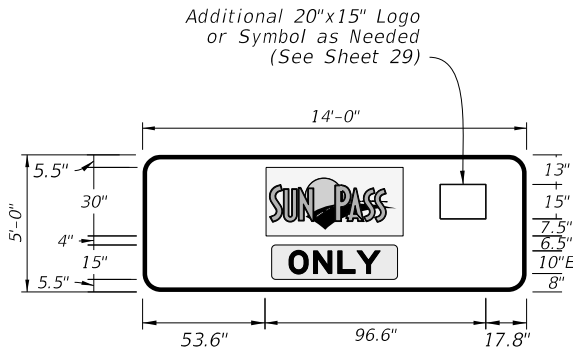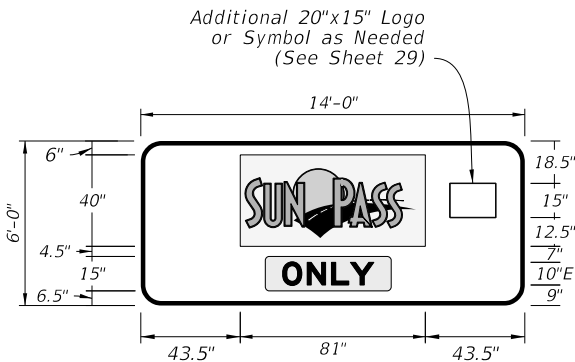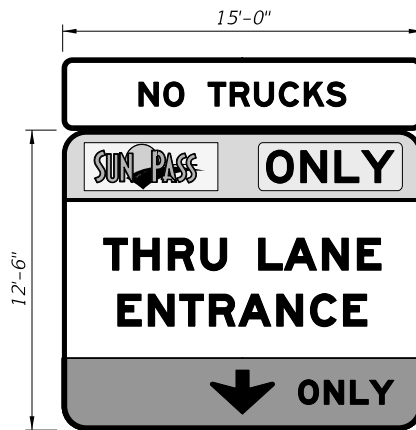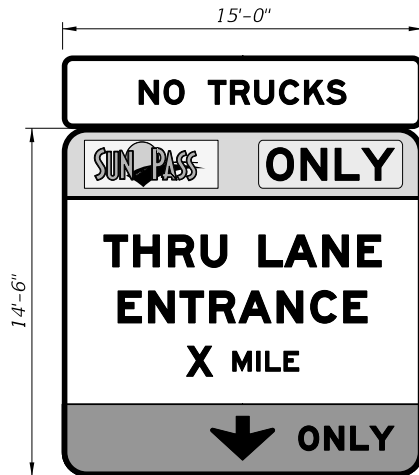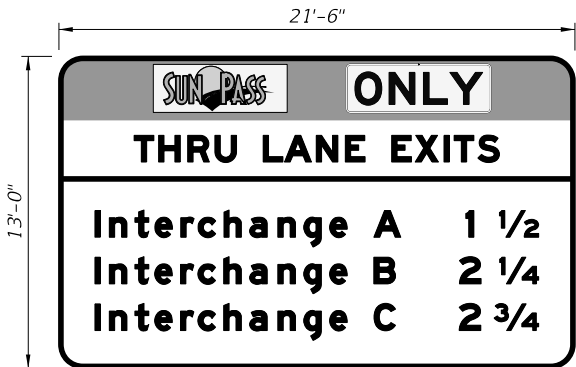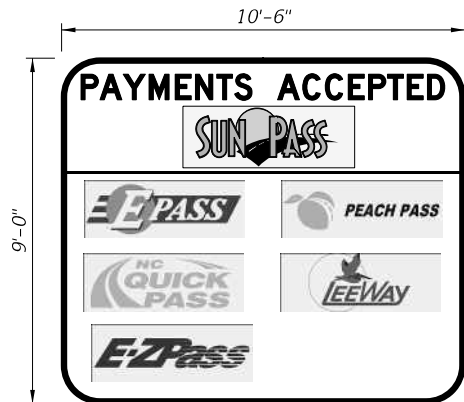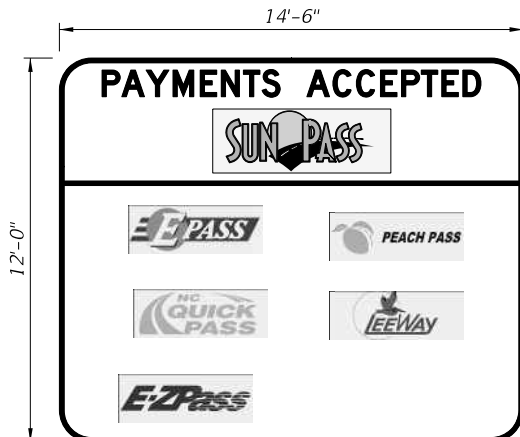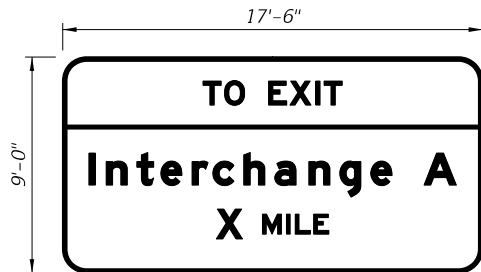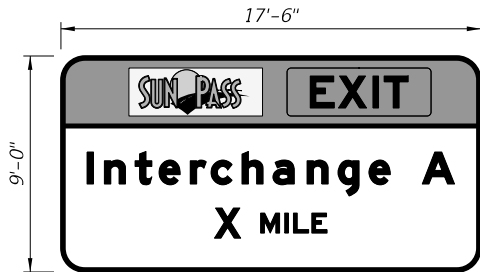9/28/2026 12:13:56 PM


 <p><i>6" Series E Legend Black Legend with White Background Purple Background White Border</i></p> <p>TOL-025-26 3'-0" X 3'-0" 3" Radii ¾" Border</p>		 <p><i>10" Series E Legend Black Legend with White Background Purple Background White Border</i></p> <p>TOL-026-26 12'-0" X 5'-0" 8" Radii 2" Border</p>		 <p><i>10" Series E Legend Black Legend with White Background Purple Background White Border</i></p> <p>TOL-026A-26 14'-0" X 5'-0" 8" Radii 2" Border</p>		 <p><i>10" Series E Legend Black Legend with White Background Purple Background White Border</i></p> <p>TOL-026B-26 14'-0" X 6'-0" 9" Radii 2" Border</p>		
 <p>TOL-027-26 10'-6" X 12'-6" 12" Radii 2" Border</p>		 <p><i>12" and 16" Series E Legend 16" Series EM Legend White, Purple, Green, and Yellow Background Black and White Legend and Border</i></p> <p>TOL-028-26 15'-0" X 12'-6" 12" Radii 2" Border</p>		 <p><i>10" and 12" Series E Legend 16" Series EM Legend White, Purple, Green, and Yellow Background Black and White Legend and Border</i></p> <p>TOL-029-26 15'-0" X 14'-6" 12" Radii 2" Border</p>		 <p><i>16" Series E and 13.5" Series EM Legend White Legend and White, Purple, and Green Background White Border</i></p> <p>TOL-030-26 21'-6" X 13'-0" 12" Radii 2" Border</p>		
 <p>TOL-031-26 10'-6" X 9'-0" 12" Radii 1.5" Border</p>		 <p>TOL-031A-26 14'-6" X 12'-0" 12" Radii 1.75" Border</p>		 <p><i>10" and 12" Series E Legend 16" Series EM Legend Green Background White Legend and Border</i></p> <p>TOL-032-26 17'-6" X 9'-0" 12" Radii 2" Border</p>		 <p><i>10" Series E Legend 16" Series EM Legend Purple and Green Background White Legend and Border</i></p> <p>TOL-033-26 17'-6" X 9'-0" 12" Radii 2" Border</p>		
LAST REVISION 11/01/26	REVISION	DESCRIPTION:	 FY 2027-28 STANDARD PLANS	SPECIAL SIGN DETAILS			INDEX 700-102	SHEET 26 of 29

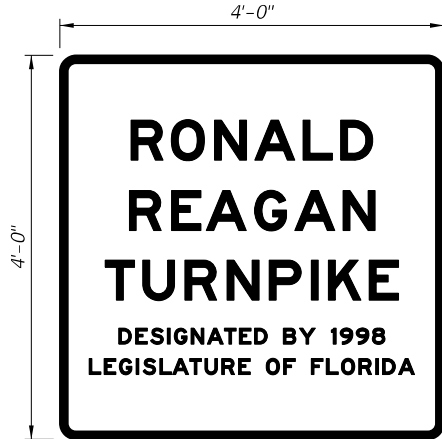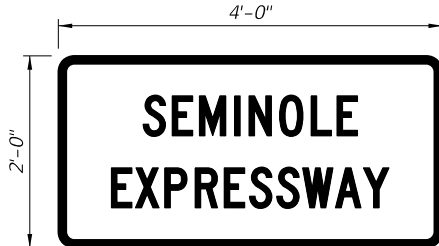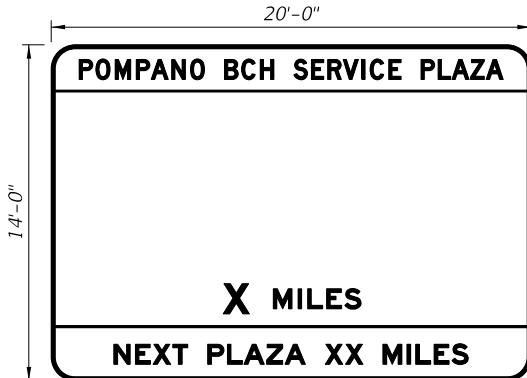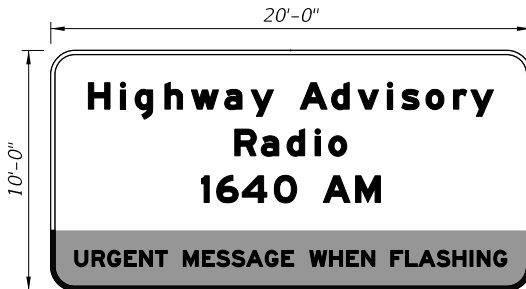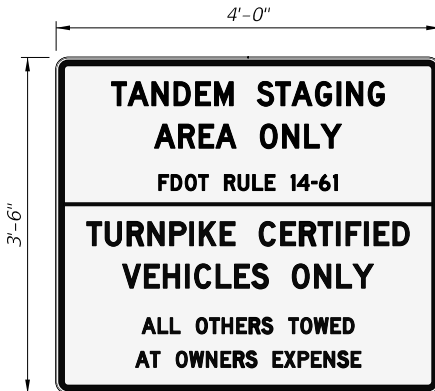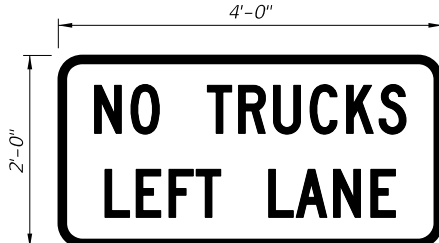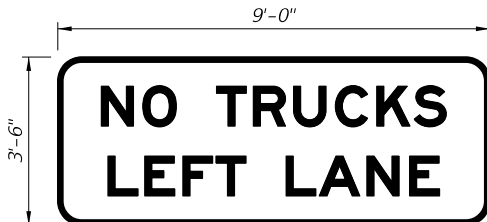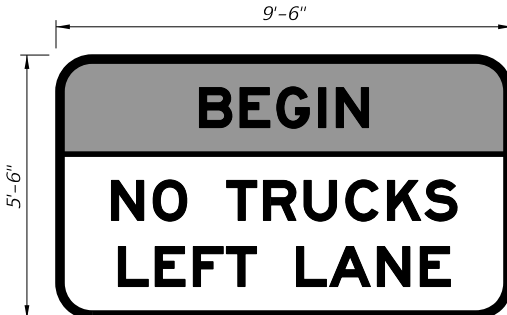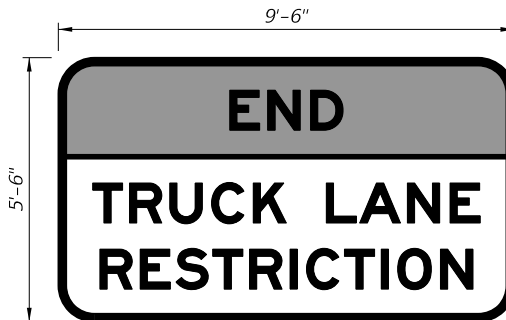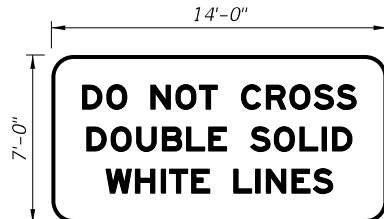 <p>TOL-034-26 4'-0" X 4'-0" 4" Radii 1" Border</p> <p>2" and 5" Series E Legend Green Background White Legend and Border</p>		 <p>TOL-035-26 4'-0" X 2'-0" 2" Radii 1" Border</p> <p>5" Series C Legend Green Background White Legend and Border</p>		 <p>TOL-036-26 20'-0" X 14'-0" 12" Radii 2" Border</p> <p>10" Series D Legend and 10" Series E Legend Blue Background White Legend and Border</p>		 <p>TOL-037-26 20'-0" X 10'-0" 12" Radii 2" Border</p> <p>TOP: 13.3" Series EM Legend Blue Background White Legend and Border BOTTOM: 8" Series E Legend Yellow Background Black Legend and Border</p>	
 <p>TOL-038-26 4'-0" X 3'-6" 1.13" Radii 0.63" Border</p> <p>2" and 3" Series D Legend White Background Black Legend and Border</p>		 <p>TOL-039-26 4'-0" X 2'-0" 3" Radii 1" Border</p> <p>6" Series C Legend White Background Black Legend and Border</p>		 <p>TOL-039A-26 9'-0" X 3'-6" 6" Radii 1.25" Border</p> <p>10" Series E Legend White Background Black Legend and Border</p>		 <p>TOL-040-26 9'-6" X 5'-6" 9" Radii 2" Border</p> <p>TOP: 10" Series E Legend Yellow Background Black Legend and Border BOTTOM: 10" Series E Legend White Background Black Legend and Border</p>	
 <p>TOL-041-26 9'-6" X 5'-6" 9" Radii 2" Border</p> <p>TOP: 10" Series E Legend Yellow Background Black Legend and Border BOTTOM: 10" Series E Legend White Background Black Legend and Border</p>		 <p>TOL-042-26 14'-0" X 7'-0" 11" Radii 2" Border</p> <p>12" Series E Legend White Background Black Legend and Border</p>		 <p>TOL-043-26 13'-0" X 8'-0" 12" Radii 2" Border</p> <p>13.5" Series E Legend White Background Black Legend and Border</p>		 <p>TOL-044-26 13'-0" X 9'-6" 12" Radii 2" Border</p> <p>10" and 13.5" Series E Legend White Background Black Legend and Border</p>	
LAST REVISION 11/01/26	DESCRIPTION:	 FY 2027-28 STANDARD PLANS	SPECIAL SIGN DETAILS			INDEX 700-102	SHEET 27 of 29



TOL-045-26
1'-6" X 1'-0"
1.5" Radii 1/2" Border

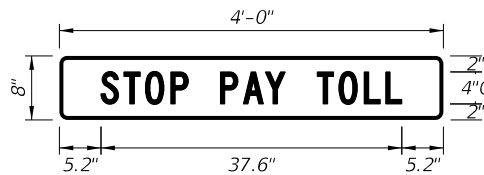3" Series C Legend
Fluorescent Yellow Background
Black Legend and Border




TOL-046-26
4'-0" X 8"
1" Radii 1/2" Border

4" Series C Legend
Red Background
White Legend and Border




TOL-047-26
3'-0" X 1'-6"
3" Radii 3/4" Border

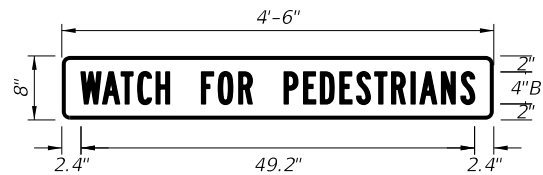TOP:
4" Series D Legend
White Legend
Red Background
BOTTOM:
2" Series D Legend
White Background
Black Legend



TOL-048-26
4'-6" X 8"
1" Radii 1/2" Border

4" Series B Legend
Fluorescent Yellow Background
Black Legend and Border




TOLL ATTENDANT WARNING SYMBOL

SYMBOL DIMENSIONS

Size	A	B	C
8"	8"	0.6"	0.6"
14"	1"	1"	1"


- NOTE:
1. Place symbols in booth doorways and walkway as shown in the Plans.
 2. Clean surfaces thoroughly prior to application.

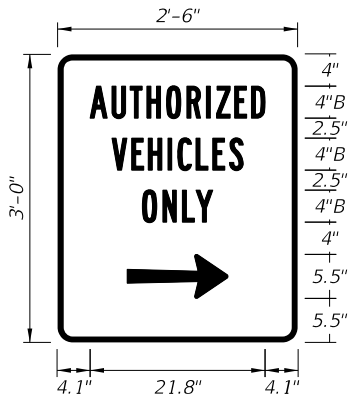TOL-049-26
Yellow Background
Black Legend
Red Border



TOL-050-26
2'-6" X 3'-0"
1.875" Radii 3/4" Border


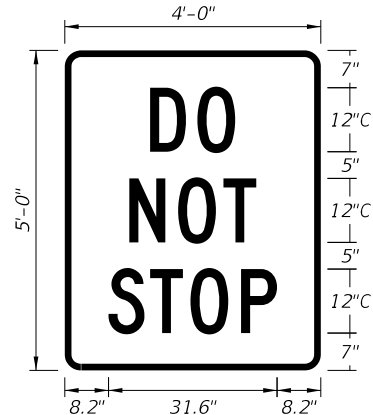
4" Series B Legend
White Background
Black Legend and Border



TOL-051-26
4'-0" X 5'-0"
1.5" Radii 1/2" Border



12" Series C Legend
White Background
Black Legend and Border

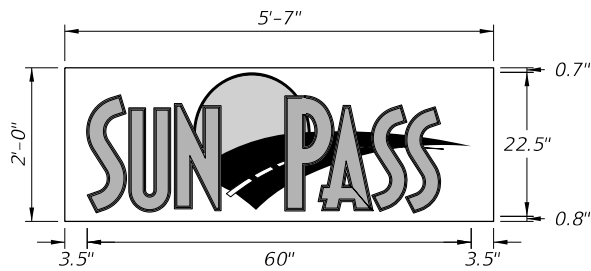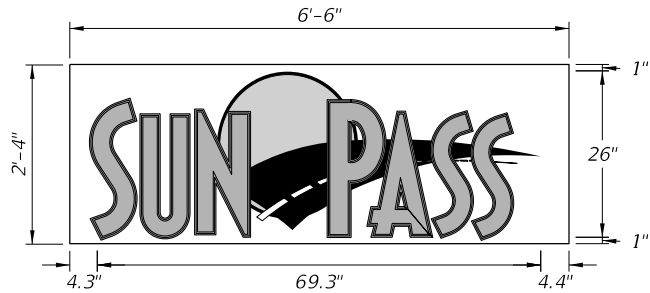9/28/2026 12:14:02 PM







- NOTES:**
- See FDOT Highway Sign Library for Microstation formatted logos.
 - Logos are not to be fabricated by hand cut out method.
 - Use colors as specified in the MUTCD.

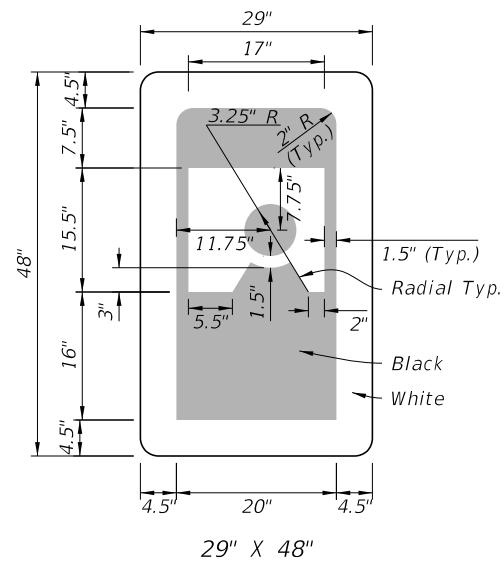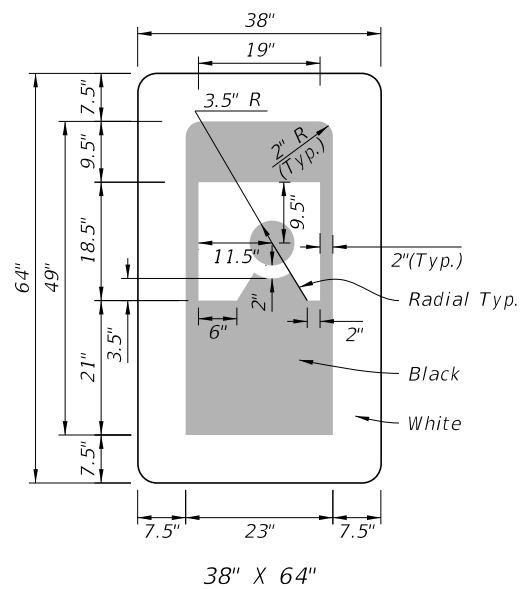
SUNPASS SHIELD




TOLL ATTENDANT SHIELD

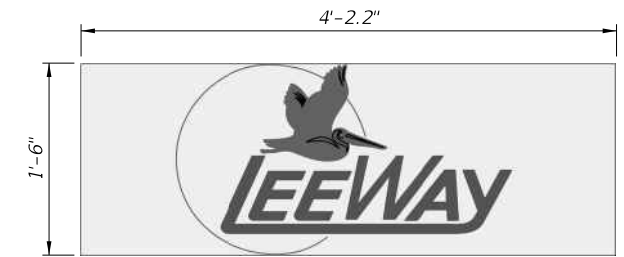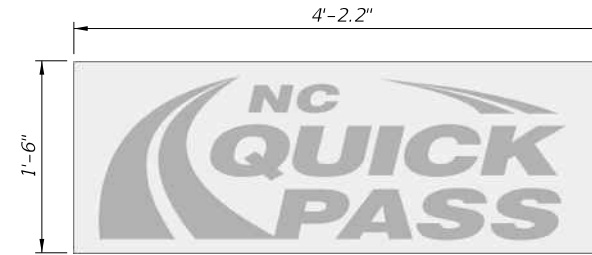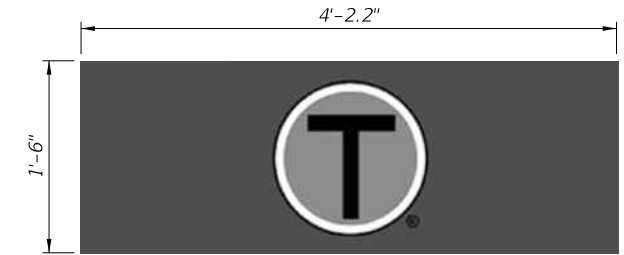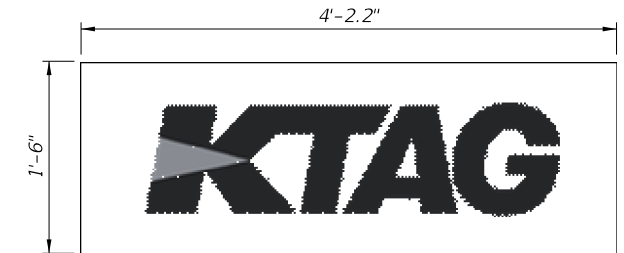

ADDITIONAL SHIELDS

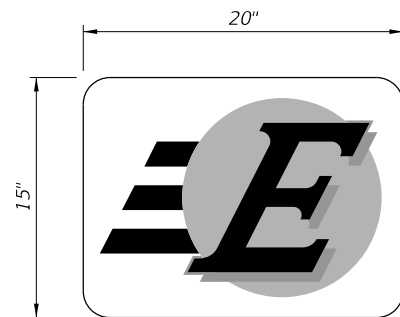

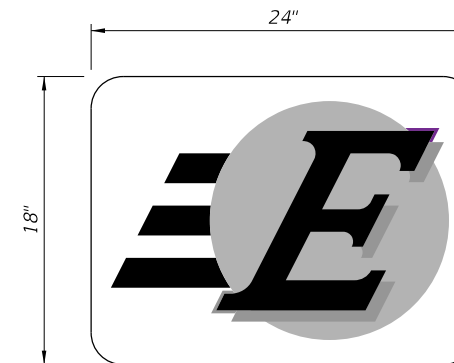- NOTES:**
- EPASS logo colors:
White
Purple, 3M Violet No. 893 or approved equal.
Orange, 3M Orange No. 886 or approved equal.
 - Narrow portions of special design copy in EPASS logo have a minimum thickness of 1.00 inch.
 - Attached shield by riveting method only. No adhesives or other means are allowed.



EPASS SHIELD

SPECIAL SIGN DETAILS CROSSWALK					
Previous Sign Number	Current Sign Number	Sign Description	Previous Sign Number	Current Sign Number	Sign Description
FTP-2-06	FTP-001-25	ALL TRUCKS ENTER WEIGH STATION (OTHER THAN FREEWAY USE)	FTP-91-22	FTP-026-25	STOP WHILE SCHOOL BUSES LOAD OR UNLOAD THIS ROADWAY
FTP-1-06	FTP-001A-25	ALL TRUCKS ENTER WEIGH STATION (FREEWAY USE)	NEW	FTP-027-25	STATE LAW STOP FOR PEDESTRIANS IN CROSSWALKS
FTP-6A/B-06	FTP-002R/L-25	ALL TRUCKS - TRAILERS PICKUPS VANS NEXT (RIGHT / LEFT)	NEW	FTP-027A-25	STATE LAW STOP FOR PEDESTRIANS IN CROSSWALKS
FTP-51-06	FTP-003-25	WEIGHT LIMIT LAST EXIT	NEW	FTP-028-25	CROSSWALK STOP ON RED PROCEED ON FLASHING RED WHEN CLEAR
FTP-44A-25	FTP-004-25	SAFETY BELT CHILD RESTRAINT USE REQUIRED BY LAW	FTP-86-21	FTP-029-25	STATE LAW STOP FOR [PED] WITHIN CROSSWALK
FTP-44-06	FTP-004A-25	SAFETY BELT CHILD RESTRAINT USE REQUIRED BY LAW	FTP-25-06	FTP-030-25	PUSH BUTTON TO CROSS ST NAME
FTP-47-06	FTP-005-25	BUCKLE UP IT'S THE LAW	FTP-68A-06	FTP-031-25	PEDESTRIAN CROSSING PUSH BUTTON
FTP-46-06	FTP-005A-25	BUCKLE UP IT'S THE LAW	FTP-68B-06	FTP-032-25	PEDESTRIAN CROSSING PUSH BUTTON
FTP-45-25	FTP-006-25	FLORIDA LAW SAFETY BELT USE CHILD RESTRAINT USE	FTP-68C-21	FTP-033-25	PUSH BUTTON FOR WARNING LIGHTS
NEW	FTP-007-25	FENDER BENDER MOVE VEHICLES FROM TRAVEL LANES (NON-LIMITED ACCESS)	FTP-54L-06	FTP-034L/R-25	[LEFT / RIGHT ARROW] ONLY (FTP-034R-25 FOR RIGHT ARROW)
NEW	FTP-007A-25	FENDER BENDER MOVE VEHICLES FROM TRAVEL LANES (NON-LIMITED ACCESS)	FTP-55L-06	FTP-034L/R-25	[LEFT / RIGHT ARROW] ONLY (FTP-03AR-25 FOR RIGHT ARROW)
NEW	FTP-007B-25	FENDER BENDER MOVE VEHICLES FROM TRAVEL LANES (NON-LIMITED ACCESS)	FTP-82-08	FTP-034U-25	[U-TURN] ONLY
NEW	FTP-008-25	FLORIDA LAW - MOVE OVER FOR STOPPED EMERGENCY VEHICLES	FTP-53-06	DELETED	LEFT TURN ONLY - IN THE MUCTD
NEW	FTP-009-25	TWO-AXLE VEHICLES ONLY BUSES ALLOWED (LIMITED ACCESS)	FTP-52-06	DELETED	RIGHT TURN ONLY - IN THE MUCTD
FDM ESS-R1	FTP-010-25	EMERGENCY STOPPING SITE	NEW	FTP-036-25	NO PEDESTRIANS OR BICYCLES BEYOND GATE
FDM ESS-R2	FTP-011-25	EMERGENCY STOPPING SITE 1 MILE	FTP-100-25	FTP-037-25	FLORIDA LAW
FDM ESS-R3	FTP-012-25	EMERGENCY STOPPING SITE X MILES	FTP-69-06	DELETED	NO PEDESTRIANS BICYCLES MOTOR VEHICLES LESS THAN 5 BHP
FTP-65-06	FTP-013-25	OFFICIAL USE ONLY	FTP-50-06	FTP-200-25	WEIGHT LIMIT RESTRICTION AHEAD
FTP-29-06	FTP-014-25	GROOVED	FTP-33-06	FTP-201-25	SCHOOL ENTRANCE
FTP-41-21	FTP-015-25	FLORIDA LITTER LAW \$150 MIN FINE FOR LITTERING	FTP-84-09	FTP-202-25	DRAW BRIDGE AHEAD
FTP-40-21	FTP-015A-25	FLORIDA LITTER LAW \$150 MIN FINE FOR LITTERING	FTP-61-06	FTP-203-25	NO TRAIN HORN 10 PM - 6 AM
FTP-19-06	FTP-016-25	24 HOUR PARKING	FTP-62-06	FTP-203A-25	NO TRAIN HORN 10 PM - 6 AM
FTP-20-06	FTP-017-25	PARKING BY DISABLED PERMIT ONLY	NEW	FTP-204-25	X-ING
FTP-21-06	FTP-018-25	PARKING BY DISABLED PERMIT ONLY	NEW	FTP-205-25	ON SIDEWALK
FTP-22-06	FTP-019-25	FINE \$250 MAX	NEW	FTP-206-25	MOTORCYCLES USE CAUTION (SINGLE - LANE)
NEW	FTP-019A-25	FINE \$250 MAX	NEW	FTP-206A-25	MOTORCYCLES USE CAUTION (MULTI-LANE)
FTP-37-06	FTP-020-25	SPEEDING FINES DOUBLED WORK ZONES SCHOOL ZONES	NEW	FTP-206B-25	MOTORCYCLES USE CAUTION
FTP-38-22	FTP-021-25	SPEEDING FINES DOUBLED	NEW	FTP-207-25	PRESCRIBED BURN AHEAD (NON-LIMITED ACCESS)
FTP-39-06	FTP-021A-25	SPEEDING FINES DOUBLED (FREEWAY SIGN)	NEW	FTP-207A-25	PRESCRIBED BURN AHEAD (LIMITED ACCESS)
FTP-35-06	FTP-022-25	SCHOOL SPEED LIMIT XX	FTP-72-06	FTP-208-25	FIRE SMOKE AREA
FTP-31-06	FTP-023-25	SCHOOL ZONE XX [FLASHER] MPH WHEN FLASHING (SPAN WIRE)	FTP-71-06	FTP-208A-25	FIRE SMOKE AREA
FTP-31-06	FTP-023A-25	SCHOOL ZONE XX [FLASHER] MPH WHEN FLASHING (MAST ARM)	FTP-15A-06	FTP-400-25	STATE OF FLORIDA WELCOME CENTER 1 MILE
FTP-34-06	FTP-024-25	END SCHOOL ZONE	FTP-10-06	FTP-401-25	STATE OF FLORIDA WELCOME CENTER 1/2 MILE
FTP-32-06	FTP-024A-25	END SCHOOL ZONE	FTP-15B-06	FTP-400A-25	STATE OF FLORIDA WELCOME CENTER 1 MILE
FTP-90-22	FTP-025-25	ALL TRAFFIC BOTH DIRECTIONS STOP WHILE SCHOOL BUSES LOAD OR UNLOAD	FTP-15C-06	FTP-402-25	STATE OF FLORIDA WELCOME CENTER [RIGHT ARROW]

SPECIAL SIGN DETAILS CROSSWALK					
Previous Sign Number	Current Sign Number	Sign Description	Previous Sign Number	Current Sign Number	Sign Description
FTP-11-06	FTP-402A-25	STATE OF FLORIDA WELCOME CENTER [RIGHT ARROW]	FTP-8-06	FTP-602A-25	CLOSED (FREEWAY USE)
FTP-13-06	FTP-403-25	WELCOME CENTER [RIGHT ARROW]	FTP-9A-06	FTP-603R/L-25	TRUCKS - TRAILERS PICKUPS - VANS [RIGHT / LEFT ARROW]
FTP-12-06	FTP-404-25	STATE OF FLORIDA OFFICIAL WELCOME CENTER	FTP-7A-06	FTP-604R-25	WEIGH STATION AGRICULTURAL INSPECTION NEXT RIGHT
FTP-14-06	FTP-405-25	Tourist Information Center NEXT RIGHT	FTP-7B-06	FTP-604L-25	WEIGH STATION AGRICULTURAL INSPECTION NEXT LEFT
FTP-87-21	FTP-406-25	REST AREA TRUCK PARKING XXX SPACES AVAILABLE	FTP-83-08	FTP-605R/L-25	ALL TRUCKS [RIGHT / LEFT ARROW]
FTP-88-21	FTP-407-25	WEIGH STATION TRUCK PARKING XXX SPACES AVAILABLE	FTP-36-06	FTP-606-25	ONE - STOP CAREER CENTER [RIGHT ARROW]
FTP-89-21	FTP-408-25	WELCOME CENTER TRUCK PARKING XXX SPACES AVAILABLE	FTP-48-06	FTP-607-25	RECYCLING [SYMBOL] COLLECTION CENTER
FTP-73-06	FTP-409-25	VENDING MACHINES	FTP-49-06	FTP-608-25	RECYCLING [SYMBOL] COLLECTION CENTER
FTP-74-06	FTP-410-25	VENDING FREE COFFEE	NEW	FTP-609-25	[DIRECTION] [U.S. HWY NO.] MILE [MILE MARK]
FTP-75-06	FTP-411-25	SAFETY BREAK	FTP-16-10	FTP-610-25	FLORIDA'S TURNPIKE
FTP-76-06	FTP-412-25	MACHINES	FTP-17-10	FTP-610A-25	FLORIDA'S TURNPIKE
FTP-43-06	FTP-413-25	FLORIDA HIGHWAY PATROL CALL * FHP (347)	FTP-18-10	FTP-610B-25	FLORIDA'S TURNPIKE
FTP-66-21	FTP-414-25	FLORIDA 511 TRAVEL INFO CALL 511	FTP-81-06	FTP-611-25	TOLL [FLORIDA]
FTP-67-21	FTP-414A-25	FLORIDA 511 TRAVEL INFO CALL 511	FTP-80-06	FTP-611A-25	TOLL [FLORIDA]
FTP-78-06	FTP-415-25	EVACUATION ROUTE	FTP-79-06	FTP-611B-25	TOLL [FLORIDA]
FTP-77-06	FTP-415A-25	EVACUATION ROUTE	FTP-17-06	FTP-612-25	FLORIDA ROUTE MARKER
FTP-23-06	FTP-416-25	INTERNATIONAL SYMBOL OF ACCESS FOR HEARING LOSS	FTP-18-06	FTP-613-25	COUNTY ROUTE MARKER
FTP-24-06	FTP-417-25	INTERNATIONAL TDD SYMBOL	NEW	FTP-614-25	AMTRAK (NON-LIMITED ACCESS)
FTP-56A-06	FTP-418-25	TRY CARPOOLING (NON-LIMITED ACCESS)	NEW	FTP-614A-25	AMTRAK (LIMITED ACCESS)
FTP-56-06	FTP-418A-25	TRY CARPOOLING (LIMITED ACCESS)	NEW	FTP-615-25	GREYHOUND (NON-LIMITED ACCESS)
FTP-58-06	FTP-419-25	TRY VANPOOLING (NON-LIMITED ACCESS)	NEW	FTP-615A-25	GREYHOUND (LIMITED ACCESS)
FTP-57-06	FTP-419A-25	TRY VANPOOLING (LIMITED ACCESS)	NEW	FTP-616-25	SHIP (NON-LIMITED ACCESS)
FTP-60-06	FTP-420-25	TRY TRANSIT (NON-LIMITED ACCESS)	NEW	FTP-616A-25	SHIP (LIMITED ACCESS)
FTP-59-06	FTP-420A-25	TRY TRANSIT (LIMITED ACCESS)	NEW	FTP-800-25	MEMORIAL HIGHWAY
NEW	FTP-421-25	FLORIDA SHARE-A-RIDE (NON-LIMITED ACCESS)	NEW	FTP-800A-25	MEMORIAL HIGHWAY
NEW	FTP-421A-25	FLORIDA SHARE-A-RIDE (LIMITED ACCESS)	FTP-42-06	FTP-801-25	ADOPT - A - HIGHWAY
NEW	FTP-421B-25	FLORIDA SHARE-A-RIDE	NEW	FTP-802-25	FLORIDA SCENIC HIGHWAY
NEW	FTP-422-25	EMERGENCY INFO XX.X FM	NEW	FTP-802A-25	FLORIDA SCENIC HIGHWAY
NEW	FTP-422A-25	EMERGENCY INFO XX.X FM			
FTP-70-06	FTP-422B-25	EMERGENCY INFO XX.X FM			
NEW	FTP-423-025	TRAFFIC INFO TUNE RADIO TO 0000AM			
NEW	FTP-423A-25	TRAFFIC INFO TUNE RADIO TO 0000AM			
FTP-3-06	FTP-600-25	WEIGH STATION 1000 FT (OTHER THAN FREEWAY USE)			
FTP-5-06	FTP-601-25	WEIGH STATION AGRICULTURAL INSPECTION 1 MILE			
FTP-4-06	FTP-602-25	CLOSED (OTHER THAN FREEWAY USE)			

SPECIAL SIGN DETAILS CROSSWALK

Previous Sign Number	Current Sign Number	Sign Description	Previous Sign Number	Current Sign Number	Sign Description
MOT-1-22	TTC-001-25	STAY IN YOUR LANE			
MOT-4-22	TTC-002-25	LITTER PICK UP AHEAD			
MOT-5-22	TTC-003-25	TRUCKS ENTERING HIGHWAY			
MOT-6-22	TTC-003A-25	TRUCKS ENTERING HIGHWAY			
MOT-7-22	TTC-004-25	TRUCKS TURNING LEFT XXX FT			
MOT-8-22	TTC-005-25	MERGE RIGHT ON FLASHING ARROW			
MOT-9-22	TTC-006-25	LIGHTED WORK ZONE AHEAD			
MOT-10-22	TTC-007-25	STATE PRISONERS WORKING			
MOT-27-25	TTC-008-25	CENTER LANE CLOSED AHEAD			
MOT-15-06	TTC-009-25	GROOVED PAVEMENT AHEAD			
MOT-18-10	TTC-010-25	RUMBLE STRIPS AHEAD			
MOT-14-06	TTC-011-25	SPEEDING FINES DOUBLED WHEN WORKERS PRESENT (ARTERIAL SIGN)			
MOT-13-06	TTC-011A-25	SPEEDING FINES DOUBLED WHEN WORKERS PRESENT (FREEWAY SIGN)			
MOT-16-06	TTC-012-25	SLOW DOWN MY DADDY WORKS HERE			
MOT-17-06	TTC-013-25	SLOW DOWN MY MOMMY WORKS HERE			
MOT-19-11	TTC-014-25	LEGAL WEIGHTS ONLY			
MOT-23-21	TTC-015-25	RETURN TO SHOULDER			
MOT-11-06	TTC-016R/L-25	BUSINESS ENTRANCE [RIGHT / LEFT ARROW]			
MOT-12R-06	TTC-017R/L-25	PEDESTRIAN WALKWAY [RIGHT / ARROW]			
MOT-21-21	TTC-018-25	BICYCLE DETOUR			
NEW	TTC-019-25	REDUCE SPEED SMOKE AHEAD			
NEW	TTC-019A-25	REDUCE SPEED SMOKE AHEAD			
NEW	TTC-020-25	MOTORCYCLES USE CAUTION			
NEW	TTC-020A-25	MOTORCYCLES USE CAUTION			
NEW	TTC-020B-25	MOTORCYCLES USE CAUTION			

SPECIAL SIGN DETAILS CROSSWALK

Previous Sign Number	Current Sign Number	Sign Description	Previous Sign Number	Current Sign Number	Sign Description
AET-02S	AET-001-26	WE BILL YOU WITH TOLL-BY-PLATE SUBJECT TO ADMIN CHARGES (RAMP APPLICATION)	TOL-X1	TOL-023B-26	EXACT COINS
AET-02L	AET-001A-26	WE BILL YOU WITH TOLL-BY-PLATE SUBJECT TO ADMIN CHARGES (MAINLINE APPLICATION)	TOL-XS3	TOL-024-26	SUNPASS EXACT COINS
AET-07S	AET-002-26	TOLL SUNPASS / TOLL-BY-PLATE (RAMP APPLICATION)	TOL-XS2	TOL-024A-26	SUNPASS EXACT COINS
AET-07L	AET-002A-26	TOLL SUNPASS / TOLL-BY-PLATE (MAINLINE USE)	TOL-XS1	TOL-024B-26	SUNPASS EXACT COINS
TOL-AC1	TOL-001-26	CASH LANES	TOL-S4	TOL-025-26	SUNPASS ONLY
TOL-AX1	TOL-002-26	EXACT COINS CARS ONLY	TOL-S3	TOL-026-26	SUNPASS ONLY
TOL-AS1	TOL-003-26	SUNPASS ONLY [SINGLE ARROW]	TOL-S2	TOL-026A-26	SUNPASS ONLY
TOL-AS3	TOL-004-26	SUNPASS ONLY [TWO ARROW]	TOL-S1	TOL-026B-26	SUNPASS ONLY
TOL-SPX3	TOL-005-26	SUNPASS ONLY [THREE ARROW]	TOL-ML4	TOL-027-26	NO TRUCKS SUNPASS ONLY
TOL-AS2	TOL-006-26	SUNPASS - KEEP LEFT	TOL-ML2	TOL-028-26	NO TRUCKS - SUNPASS ONLY THRU LANE ENTRANCE
TOL-V2	TOL-007-26	TOLL VIOLATIONS PHOTO ENFORCED (RAMP APPLICATION)	TOL-ML1	TOL-029-26	NO TRUCKS - SUNPASS ONLY THRU LANE ENTRANCE - X MILE
TOL-V1	TOL-007A-26	TOLL VIOLATIONS PHOTO ENFORCED (MAINLINE APPLICATION)	TOL-ML3	TOL-030-26	SUNPASS ONLY - THRU LANE ENTRANCE (INTERCHANGE A THRU C)
TOL-RSZ	TOL-008-26	REDUCED SPEED ZONE AHEAD	TOL-INT1	TOL-031-26	PAYMENTS ACCEPTED SUNPASS (OTHERS)
TOL-TOLL8	TOL-009-26	TOLL PLAZA AHEAD - REDUCE SPEED	TOL-INT2	TOL_031A-26	PAYMENTS ACCEPTED SUNPASS (OTHERS)
TOL-TOLL1	TOL-010-26	TOLL PLAZA 1/2 MILE - REDUCE SPEED	TOL-ML5	TOL-032-26	TO EXIT INTERCHANGE A X MILE
TOL-TOLL2	TOL-011-26	TOLL PLAZA 1 MILE - REDUCE SPEED	TOL-ML6	TOL-033-26	SUNPASS EXIT INTERCHANGE A X MILE
TOL-TOLL3	TOL-012-26	TOLL PLAZA 2 MILES	RONALD3	TOL-034-26	RONALD REAGAN TURNPIKE
TOL-TOLL4	TOL-013-26	TOLL PLAZA 1 MILE - CASH KEEP RIGHT	TOL-BRAND	TOL-035-26	SEMINOLE EXPRESSWAY
TOL-FINE	TOL-014-26	SPEEDING FINES DOUBLED THROUGH TOLL PLAZA (MAINLINE AND RAMP USE)	TOL-SERV1	TOL-036-26	SERVICE PLAZA
TOL-WIDE	TOL-015-26	WIDE LANE KEEP RIGHT	TOL-HAR	TOL-037-26	HIGHWAY ADVISORY - RADIO 1640 AM
TOL-TOLL5	TOL-016-26	TOLL SCHEDULE (USE ON RAMP)	TOL-TANDEM	TOL-038-26	TANDEM STAGING AREA ONLY
TOL-TOLL6	TOL-016A-26	TOLL SCHEDULE (MAINLINE USE)	TOL-NT4	TOL-039-26	NO TRUCKS LEFT LANE
TOL-CPX1	TOL-017-26	CASH LANES KEEP RIGHT	TOL-NT2	TOL-039A-26	NO TRUCKS LEFT LANE
TOL-CPX3	TOL-018-26	CASH LANES ONLY [ARROW RIGHT]	TOL-NT1	TOL-040-26	BEGIN - NO TRUCKS LEFT LANE
TOL-CPX2	TOL-018A-26	CASH LANES ONLY [ARROW DOWN]	TOL-NT3	TOL-041-26	END - TRUCK LANE RESTRICTION
TOL-CPX5	TOL-019-26	CASH LANES ONLY[ARROW RIGHT]	TOL-ML9	TOL-042-26	DO NOT CROSS DOUBLE SOLID WHITE LINES
TOL-CPX4	TOL-019A-26	CASH LANES ONLY [ARROW DOWN]	TOL-ML8	TOL-043-26	LANE RESTRICTION ENDS
TOL-AS4	TOL-020-26	SUNPASS KEEP LEFT	TOC-ML7	TOL-044-26	LANE RESTRICTION ENDS X MILE
TOL-C3	TOL-021-26	CHANGE PROVIDED	TOL-1	TOL-045-26	STAY IN VEHICLE
TOL-C2	TOL-021A-26	CHANGE PROVIDED	TOL-2	TOL-046-26	STOP PAY TOLL
TOL-C1	TOL-021B-26	CHANGE PROVIDED	TOL-3	TOL-047-26	WARNING VEHICLES DO NOT STOP PROCEED WITH CAUTION
TOL-CS3	TOL-022-26	SUNPASS CHANGE PROVIDED	TOC-4	TOL-048-26	WATCH FOR PEDESTRIANS
TOL-CS2	TOL-022A-26	SUNPASS CHANGE PROVIDED	N/A	TOL-049-26	TOLL ATTENDANT WARNING SYMBOL
TOL-CS1	TOL-022B-26	SUNPASS CHANGE PROVIDED	TOL-8	TOL-050-26	AUTHORIZED VEHICLES ONLY
TOL-X3	TOL-023-26	EXACT COINS	TOL-7	TOL-051-26	DO NOT STOP
TOL-X2	TOL-023A-26	EXACT COINS			