

Crash Cushions



**FITCH Universal
Module[®]**



**TRINITY
HIGHWAY**

Ahead of the Curve[™]

FITCH Universal Module[®]

The FITCH Universal Module[®] array is a non-redirective crash cushion, consisting of a number of sand-filled modules. Each module in the array consists of two sets of walls, one Unicore insert, one lid and four Zip Strips. Assembly options can meet NCHRP Report 350 Test Level 1, Test Level 2, or Test Level 3, depending on the number of modules. Also meets EN 1317-3 100 km/h level. The FITCH can be assembled in both permanent and work zone applications and is ideal for wide fixed objects in low frequency impact areas.




LOW REPAIR COSTS

Features

- Multi-piece barrel system reduces maintenance cost.
- Unicore insert adjusts sand capacity and height.
- No cranes or heavy equipment required for deployment or assembly.

Assembly and Maintenance

- Unicore insert allows the module's sand mass to be adjusted to any weight.
- Multi-piece construction saves time and money on repairs; typically damaged parts need to be replaced after impact.
- Filled modules relocate easily with the Fitch Quick-Lift hoisting beam.
- Unassembled module components nest for easy transport and storage.

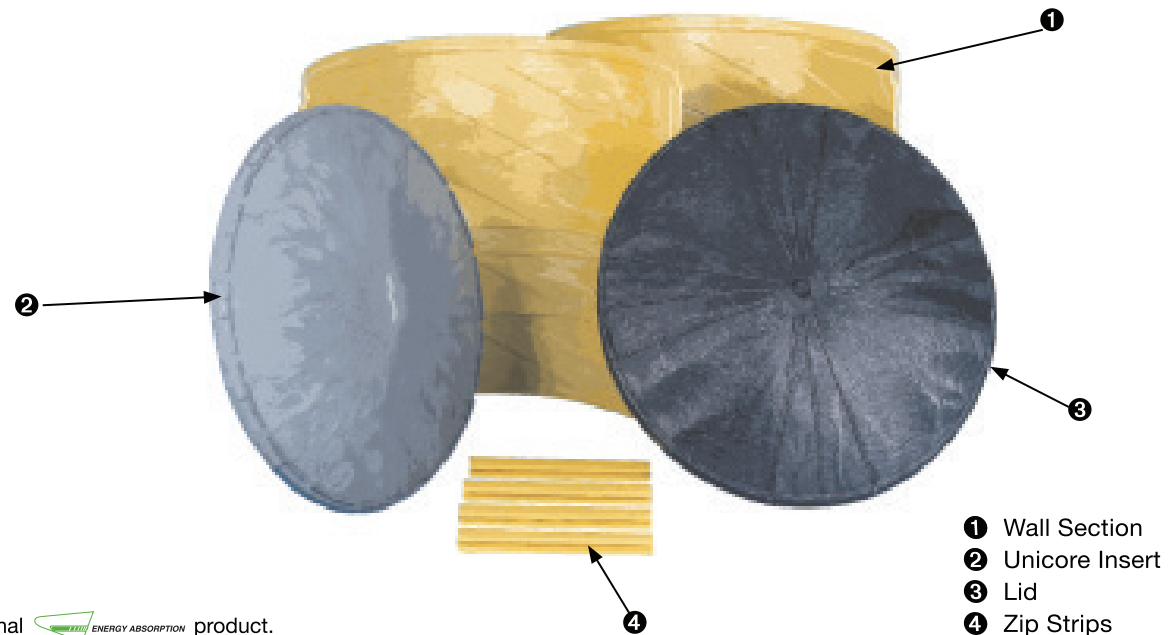

An original  ENERGY ABSORPTION SYSTEMS, INC. product.

Distributed by: 
INDUSTRIES, INC.
www.transpo.com

20 Jones Street
New Rochelle, NY 10801
(914)636-1000



Copyright © 2014 Trinity Highway Products, LLC. All Rights Reserved.

5-14
www.trinityhighway.com
1.888.323.6374