


ESTIMATED QUANTITIES REPORT

Financial Project ID: 454032-1-52-01

Contract Number: T1910

Project Description: Signalization Improvements at SR 684 and Royal Palm Drive

This item has been digitally signed and sealed by:

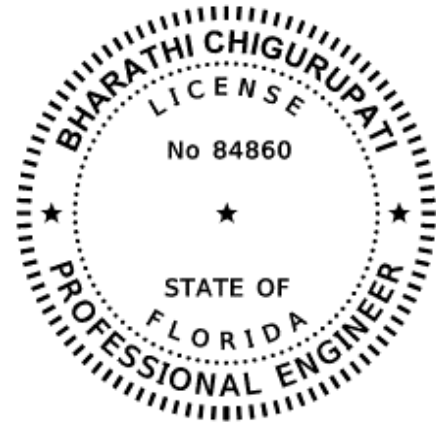

on the date adjacent to the seal.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

DRMP, Inc.

15310 Amberly Drive, Suite 310

Tampa, FL 33647

Bharathi Chigurupati, P.E. No. 84860

The estimated quantities contained in this document:

1. Were developed in compliance with Florida Department of Transportation procedures, processes, and requirements.
2. Contain no known errors or omissions.
3. Match the pay item numbers and quantities in Designer Interface for AASHTOWare Project Preconstruction™.

Summary of Lump Sum Items

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Design Notes | Construction Remarks |
|-----------------|----------------------|------------------|----------|---|----------------|---|--------------|----------------------|
| | | | P | F | P | F | | |
| 0101 1 | Mobilization | LS | 1 | | 1 | | | |
| ... | | | | | | | | |
| ... | | | | | | | | |
| ... | | | | | | | | |

Summary of Temporary Traffic Control Plan Items

| Pay Item Number | Pay Item Description | Units of Measure | Number Required | Duration (Days) | Quantity | | Total Quantity | | Secondary Quantity | | | Location | Design Notes | Construction Remarks |
|-----------------|---|------------------|-----------------|-----------------|----------|---|----------------|---|--------------------|---|---|--------------|-------------------------------|----------------------|
| | | | | | P | F | P | F | Units | P | F | Const. Phase | | |
| 0102 1 | Maintenance of Traffic | LS/DA | | 100 | 1.0 | | 1 | | | | | | 100 Days | |
| 0102 14 | Traffic Control Officer | HR | | | 16 | | 16 | | | | | I | | |
| 0102 60 | Work Zone Sign | ED | 20 | 100 | 2000 | | 7000 | | | | | I | | |
| | | | 50 | 100 | 5000 | | | | | | | I | Pedestrian Detours | |
| 0102 74 1 | Channelizing Device - Drum | ED | 70 | 100 | 7000 | | 7000 | | | | | I | | |
| 0102 76 | Arrow Board/Advance Warning Arrow Panel | ED | 1 | 100 | 100 | | 100 | | | | | I | | |
| 0102 99 | Portable Changeable Message Sign, Temporary | ED | 2 | 100 | 200 | | 228 | | | | | I | | |
| | | ED | 2 | 14 | 28 | | | | | | | I | 14 Days prior to construction | |
| 0710 11 123 | Painted Pavement Markings, Standard, White, Solid, 12" Wide | LF | | | 273.0 | | 273 | | | | | I | | |
| 0710 11 125 | Painted Pavement Markings, Standard, White, Solid, 24" For Stop Line and Crosswalk | LF | | | 97.0 | | 97 | | | | | I | | |
| 0710 11 141 | Painted Pavement Markings, Standard, White, 2'-4' Dotted Guideline/6'-10' Gap Extension, 6" | GM | | | 0.0510 | | 0.051 | | | | | I | | |
| 0710 11 160 | Painted Pavement Markings, Standard, White, Message or Symbol | EA | | | 3 | | 3 | | | | | I | | |
| 0710 11 170 | Painted Pavement Markings, Standard, White, Arrows | EA | | | 7 | | 7 | | | | | I | | |
| 0710 11 224 | Painted Pavement Markings, Standard, Yellow, Solid, 18" For Diagonals And Chevrons | LF | | | 42.0 | | 42 | | | | | I | | |
| ... | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | |

Summary of Pedestrian Longitudinal Channelizing Devices

| Pay Item Number | Pay Item Description | Units of Measure | Duration (Days) | Length (FT) | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--------------------------------------|------------------|-----------------|-------------|----------|---|----------------|---|--------------|-----------|---------------|-------------|------|--------------|----------------------|
| | | | | | P | F | P | F | Const. Phase | Alignment | Begin Station | End Station | Side | | |
| 0102 74 8 | Channelizing Device - Pedestrian LCD | FD | 100 | 5 | 500 | | 2000 | | I | SR684 | 126+00.00 | 126+00.00 | RT | | |
| | | | 100 | 5 | 500 | | | | 1 | SR684 | 126+00.00 | 126+00.00 | LT | | |
| | | | 100 | 5 | 500 | | | | I | SR684 | 127+50.00 | 127+50.00 | RT | | |
| | | | 100 | 5 | 500 | | | | 1 | SR684 | 128+00.00 | 128+00.00 | LT | | |
| ... | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | |

Summary of Erosion Control and Sediment Control Devices

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|-------------------------|------------------|----------|---|----------------|---|-----------|---------------|-------------|------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0104 10 3 | Sediment Barrier | LF | 60.0 | | 130 | | SR684 | 127+00.00 | 127+60.00 | RT | | | |
| | | | 70.0 | | | | SR684 | 127+10.00 | 127+80.00 | LT | | | |
| 0104 18 | Inlet Protection System | EA | 1 | | 6 | | SR684 | 126+40.83 | 126+40.83 | LT | | | |
| | | | 1 | | | | SR684 | 126+50.21 | 126+50.21 | RT | | | |
| | | | 1 | | | | SR684 | 126+96.86 | 126+96.86 | LT | | | |
| | | | 1 | | | | SR684 | 127+65.72 | 127+65.72 | RT | | | |
| | | | 1 | | | | SR684 | 127+88.59 | 127+88.59 | RT | | | |
| | | | 1 | | | | SR684 | 130+84.84 | 130+84.84 | RT | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |

Summary of Litter Removal and Mowing

| Pay Item Number | Pay Item Description | Units of Measure | Duration (Days) | Frequency (Days) | Length (FT) | Width (FT) | Cycles | Quantity | | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|-----------------------------|------------------|-----------------|------------------|-------------|------------|--------|------------|-------|---|----------------|---|--------------|-----------|---------------|-------------|-------|--------------|----------------------|
| | | | | | | | | AC / Cycle | P | F | P | F | Const. Phase | Alignment | Begin Station | End Station | Side | | |
| 0107 1 | Litter Removal And Disposal | AC | 100 | 30 | | | 4 | 0.100 | 0.399 | | 2.75 | | SR684 | 124+05.60 | 126+41.54 | LT | 21665 | | |
| | | | 100 | 30 | | | 4 | 0.006 | 0.022 | | | | SR684 | 124+05.60 | 124+18.17 | RT | 8227 | | |
| | | | 100 | 30 | | | 4 | 0.007 | 0.027 | | | | SR684 | 124+05.61 | 124+40.31 | LT | 21658 | | |
| | | | 100 | 30 | | | 4 | 0.242 | 0.967 | | | | SR684 | 124+41.51 | 127+65.67 | RT | 8178 | | |
| | | | 100 | 30 | | | 4 | 0.008 | 0.030 | | | | SR684 | 126+58.33 | 126+77.85 | LT | 21627 | | |
| | | | 100 | 30 | | | 4 | 0.000 | | | | | SR684 | 126+58.83 | 126+75.83 | LT | 21626 | | |
| | | | 100 | 30 | | | 4 | 0.170 | 0.681 | | | | SR684 | 126+94.72 | 130+85.92 | LT | 21618 | | |
| | | | 100 | 30 | | | 4 | 0.018 | 0.070 | | | | SR684 | 127+07.03 | 127+76.42 | LT | 21640 | | |
| | | | 100 | 30 | | | 4 | 0.127 | 0.510 | | | | SR684 | 127+88.50 | 130+85.93 | RT | 6870 | | |
| | | | 100 | 30 | | | 4 | 0.011 | 0.043 | | | | SR684 | 130+34.82 | 130+85.98 | LT/RT | 21653 | | |
| 0107 2 | Mowing | AC | 100 | 30 | | | 4 | 0.100 | 0.399 | | 2.75 | | SR684 | 124+05.60 | 126+41.54 | LT | 21756 | | |
| | | | 100 | 30 | | | 4 | 0.007 | 0.027 | | | | SR684 | 124+05.61 | 124+40.31 | LT | 21791 | | |
| | | | 100 | 30 | | | 4 | 0.005 | 0.022 | | | | SR684 | 124+05.62 | 124+17.95 | RT | 9120 | | |
| | | | 100 | 30 | | | 4 | 0.242 | 0.967 | | | | SR684 | 124+41.51 | 127+65.67 | RT | 21805 | | |
| | | | 100 | 30 | | | 4 | 0.008 | 0.030 | | | | SR684 | 126+58.33 | 126+77.85 | LT | 21683 | | |
| | | | 100 | 30 | | | 4 | 0.170 | 0.681 | | | | SR684 | 126+94.47 | 130+85.92 | LT | 21794 | | |
| | | | 100 | 30 | | | 4 | 0.018 | 0.070 | | | | SR684 | 127+07.03 | 127+76.42 | LT | 21777 | | |
| | | | 100 | 30 | | | 4 | 0.127 | 0.510 | | | | SR684 | 127+88.50 | 130+85.93 | RT | 9162 | | |
| | | | 100 | 30 | | | 4 | 0.011 | 0.043 | | | | SR684 | 130+34.82 | 130+85.98 | LT/RT | 21774 | | |
| ... | | | | | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | | | | | |

Summary of Clearing Grubbing and Removal Items

| Pay Item Number | Pay Item Description | Units of Measure | Length (FT) | Width (FT) | Quantity | | Total Quantity | | Secondary Quantity | | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|----------------------|------------------|-------------|------------|----------|---|----------------|---|--------------------|-------|---|-----------|---------------|-------------|------|------------|---------------|----------------------|
| | | | | | P | F | P | F | Units | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0110 1 1 | Clearing & Grubbing | LS | | | 1 | | 1 | | AC | 0.007 | | SR684 | 124+05.61 | 124+51.35 | LT | 21820 | 0.04 Total AC | |
| | | | | | | | | | | 0.002 | | SR684 | 124+06.04 | 124+34.91 | RT | 21827 | | |
| | | | | | | | | | | 0.001 | | SR684 | 124+52.49 | 124+62.35 | LT | 19338 | | |
| | | | | | | | | | | 0.001 | | SR684 | 124+63.50 | 124+73.38 | LT | 16023 | | |
| | | | | | | | | | | 0.001 | | SR684 | 124+74.54 | 124+84.42 | LT | 16031 | | |
| | | | | | | | | | | 0.001 | | SR684 | 124+85.59 | 124+95.53 | LT | 16036 | | |
| | | | | | | | | | | 0.001 | | SR684 | 124+96.55 | 125+06.57 | LT | 16042 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+07.59 | 125+17.60 | LT | 16048 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+18.64 | 125+28.64 | LT | 16055 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+29.68 | 125+39.67 | LT | 16061 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+40.73 | 125+50.71 | LT | 16066 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+51.77 | 125+61.74 | LT | 16071 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+62.82 | 125+72.78 | LT | 16077 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+73.86 | 125+83.81 | LT | 16082 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+84.91 | 125+94.85 | LT | 16087 | | |
| | | | | | | | | | | 0.001 | | SR684 | 125+95.95 | 126+05.88 | LT | 16095 | | |
| | | | | | | | | | | 0.001 | | SR684 | 126+07.00 | 126+16.92 | LT | 16100 | | |
| | | | | | | | | | | 0.001 | | SR684 | 126+18.03 | 126+27.95 | LT | 16106 | | |
| | | | | | | | | | | 0.018 | | SR684 | 127+07.03 | 127+76.42 | LT | 21859 | | |
| | | | | | | | | | | 0.001 | | SR684 | 127+27.18 | 127+42.80 | RT | 21881 | | |
| | | | | | | | | | | 0.001 | | SR684 | 127+31.27 | 127+38.86 | LT | 21890 | | |
| | | | | | | | | | | 0.001 | | SR684 | 127+59.95 | 127+69.79 | LT | 21858 | | |
| | | | | | | | | | | 0.001 | | SR684 | 128+28.07 | 128+37.93 | RT | 16111 | | |
| | | | | | | | | | | 0.001 | | SR684 | 128+39.08 | 128+48.93 | RT | 16117 | | |
| | | | | | | | | | | 0.001 | | SR684 | 128+50.08 | 128+59.94 | RT | 16123 | | |
| | | | | | | | | | | 0.001 | | SR684 | 128+61.09 | 128+70.94 | RT | 16130 | | |
| | | | | | | | | | | 0.001 | | SR684 | 128+72.09 | 128+81.95 | RT | 16136 | | |
| | | | | | | | | | | 0.001 | | SR684 | 128+83.10 | 128+92.95 | RT | 16143 | | |
| | | | | | | | | | | 0.001 | | SR684 | 128+94.10 | 129+03.96 | RT | 16150 | | |
| | | | | | | | | | | 0.001 | | SR684 | 129+05.10 | 129+14.96 | RT | 16155 | | |
| | | | | | | | | | | 0.001 | | SR684 | 129+16.11 | 129+25.97 | RT | 16161 | | |

Summary of Clearing Grubbing and Removal Items

| Pay Item Number | Pay Item Description | Units of Measure | Length (FT) | Width (FT) | Quantity | | Total Quantity | | Secondary Quantity | | | Location | | | | | Design Notes | Construction Remarks | |
|-----------------|------------------------------|------------------|-------------|------------|----------|---|----------------|---|--------------------|---|-------|-----------|---------------|-------------|-----------|------------|--------------|----------------------|--|
| | | | | | P | F | P | F | Units | P | F | Alignment | Begin Station | End Station | Side | Element ID | | | |
| | | | | | | | | | | | 0.001 | | SR684 | 129+27.11 | 129+36.97 | RT | 16168 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 129+38.12 | 129+47.98 | RT | 16174 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 129+49.12 | 129+58.98 | RT | 16180 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 129+60.13 | 129+69.99 | RT | 16186 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 129+71.13 | 129+80.99 | RT | 16191 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 129+82.14 | 129+92.00 | RT | 16197 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 129+93.14 | 130+03.00 | RT | 16202 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 130+04.15 | 130+14.01 | RT | 16207 | | |
| | | | | | | | | | | | 0.001 | | SR684 | 130+15.15 | 130+25.01 | RT | 19088 | | |
| | | | | | | | | | | | 0.011 | | SR684 | 130+26.14 | 130+85.98 | LT/RT | 19123 | | |
| 0110 4 10 | Removal Of Existing Concrete | SY | | | 14.6 | | 60 | | | | | | SR684 | 124+05.63 | 124+37.47 | LT | 19511 | | |
| | | | | | 2.4 | | | | | | | | SR684 | 124+73.93 | 124+84.73 | RT | 19814 | | |
| | | | | | 2.3 | | | | | | | | SR684 | 124+85.72 | 124+95.70 | RT | 19823 | | |
| | | | | | 2.2 | | | | | | | | SR684 | 124+96.49 | 125+06.93 | RT | 19832 | | |
| | | | | | 2.1 | | | | | | | | SR684 | 125+07.67 | 125+17.84 | RT | 19841 | | |
| | | | | | 1.6 | | | | | | | | SR684 | 125+18.67 | 125+26.32 | RT | 19850 | | |
| | | | | | 2.3 | | | | | | | | SR684 | 125+27.28 | 125+37.55 | RT | 19859 | | |
| | | | | | 2.1 | | | | | | | | SR684 | 125+38.35 | 125+48.21 | RT | 19868 | | |
| | | | | | 2.2 | | | | | | | | SR684 | 125+49.06 | 125+59.12 | LT/RT | 19890 | | |
| | | | | | 3.5 | | | | | | | | SR684 | 125+60.11 | 125+76.16 | LT | 19899 | | |
| | | | | | 2.0 | | | | | | | | SR684 | 125+77.03 | 125+86.50 | LT | 19908 | | |
| | | | | | 2.3 | | | | | | | | SR684 | 125+87.45 | 125+97.93 | LT | 19917 | | |
| | | | | | 2.3 | | | | | | | | SR684 | 125+98.66 | 126+09.02 | LT | 19926 | | |
| | | | | | 2.3 | | | | | | | | SR684 | 126+09.83 | 126+20.18 | LT | 19935 | | |
| | | | | | 1.6 | | | | | | | | SR684 | 126+21.16 | 126+28.46 | LT | 19944 | | |
| | | | | | 3.8 | | | | | | | | SR684 | 127+27.19 | 127+42.80 | RT | 21936 | | |
| | | | | | 8.6 | | | | | | | | SR684 | 127+27.23 | 127+42.83 | RT | 21943 | | |
| | | | | | 1.8 | | | | | | | | SR684 | 127+30.96 | 127+39.13 | LT | 17006 | | |
| ... | | | | | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | | | | | |

Summary of Earthwork

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|----------------------|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0120 1 | Regular Excavation | CY | 10.00 | | 10.0 | | SR684 | 124+05.57 | 130+86.00 | LT/RT | | | |
| 0120 6 | Embankment | CY | 40.00 | | 40.0 | | SR684 | 124+05.57 | 130+86.00 | LT/RT | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |

| Summary of Pavement | | | | | | | | | | | | | |
|---------------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|----------------------|-------|--------------|----------------------|
| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
| | | | P | F | P | F | Alignment | Begin Station | End Station | Location Description | Side | | |
| 0160 4 | Type B Stabilization | SY | 9.1 | | 28 | | SR684 | 124+05.55 | 124+40.34 | | LT/RT | 21602 | |
| | | | 8.9 | | | | SR684 | 124+05.64 | 124+39.83 | | LT | 21603 | |
| | | | 10.4 | | | | SR684 | 124+06.04 | 124+34.91 | | RT | 21593 | |
| 0285711 | Optional Base, Base Group 11 | SY | 10.4 | | 10 | | SR684 | 124+06.04 | 124+34.91 | | RT | 21608 | TYPE B-12.5 ONLY |
| 0327 70 6 | Milling Exist Asph Pavt, 1 1/2 Avg Depth | SY | 496.3 | | 5151 | | SR684 | 124+05.58 | 124+85.30 | | LT/RT | 24285 | |
| | | | 80.0 | | | | SR684 | 124+70.02 | 124+90.76 | | LT/RT | 24276 | |
| | | | 99.6 | | | | SR684 | 124+86.40 | 125+08.34 | | LT/RT | 24267 | |
| | | | 71.0 | | | | SR684 | 124+96.42 | 125+14.37 | | LT/RT | 24258 | |
| | | | 79.2 | | | | SR684 | 125+09.83 | 125+25.39 | | LT/RT | 24249 | |
| | | | 66.1 | | | | SR684 | 125+20.71 | 125+34.45 | | LT/RT | 24240 | |
| | | | 65.6 | | | | SR684 | 125+29.76 | 125+42.63 | | LT/RT | 24231 | |
| | | | 94.4 | | | | SR684 | 125+39.59 | 125+54.77 | | LT/RT | 24222 | |
| | | | 109.1 | | | | SR684 | 125+53.41 | 125+69.75 | | LT/RT | 24213 | |
| | | | 91.7 | | | | SR684 | 125+68.29 | 125+83.78 | | LT/RT | 24204 | |
| | | | 88.2 | | | | SR684 | 125+79.51 | 125+95.20 | | LT/RT | 24195 | |
| | | | 71.4 | | | | SR684 | 125+92.24 | 126+04.75 | | LT/RT | 24186 | |
| | | | 80.4 | | | | SR684 | 126+02.30 | 126+15.11 | | LT/RT | 24174 | |
| | | | 70.5 | | | | SR684 | 126+14.12 | 126+25.46 | | LT/RT | 24157 | |
| | | | 1083.4 | | | | SR684 | 126+23.08 | 127+30.55 | | RT | 24128 | |
| | | | 2405.9 | | | | SR684 | 127+30.47 | 130+69.93 | | LT | 24119 | |
| | | | 49.2 | | | | SR684 | 130+70.05 | 130+85.92 | | LT | 24113 | |
| | | | 48.7 | | | | SR684 | 130+70.08 | 130+85.92 | | RT | 24116 | |
| 0334 1 12 | Superpave Asphaltic Conc, Traffic B | TN | 1.14 | | 1.1 | | SR684 | 124+06.04 | 124+34.91 | | RT | 21610 | |
| 0337 7 81 | Asphalt Concrete Friction Course, Traffic B, FC-12.5, PG 76-22 | TN | 28.25 | | 422.0 | | SR684 | 124+05.58 | 124+57.46 | | LT/RT | 21223 | |
| | | | 0.86 | | | | SR684 | 124+06.04 | 124+34.91 | | RT | 21611 | |
| | | | 6.64 | | | | SR684 | 124+57.47 | 124+68.39 | | LT/RT | 21213 | |
| | | | 6.65 | | | | SR684 | 124+68.50 | 124+79.47 | | LT | 20872 | |
| | | | 6.63 | | | | SR684 | 124+79.51 | 124+90.45 | | LT | 20881 | |
| | | | 6.62 | | | | SR684 | 124+90.53 | 125+01.54 | | LT | 20890 | |
| | | | 6.61 | | | | SR684 | 125+01.62 | 125+12.54 | | LT | 20899 | |
| | | | 6.61 | | | | SR684 | 125+12.63 | 125+23.64 | | LT/RT | 20908 | |

| Summary of Pavement | | | | | | | | | | | | | |
|---------------------|----------------------|------------------|----------|---|----------------|---|-----------|---------------|-------------|----------------------|-------|--------------|----------------------|
| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
| | | | P | F | P | F | Alignment | Begin Station | End Station | Location Description | Side | | |
| | | | 6.62 | | | | SR684 | 125+23.69 | 125+34.66 | | LT | 20917 | |
| | | | 6.63 | | | | SR684 | 125+34.68 | 125+45.71 | | LT | 20926 | |
| | | | 6.65 | | | | SR684 | 125+45.73 | 125+56.72 | | LT | 20935 | |
| | | | 6.65 | | | | SR684 | 125+56.81 | 125+67.74 | | LT | 20944 | |
| | | | 6.66 | | | | SR684 | 125+67.79 | 125+78.82 | | LT | 20953 | |
| | | | 6.65 | | | | SR684 | 125+78.88 | 125+89.82 | | LT | 20962 | |
| | | | 6.63 | | | | SR684 | 125+89.90 | 126+00.86 | | LT | 20971 | |
| | | | 6.60 | | | | SR684 | 126+00.95 | 126+11.98 | | LT | 20980 | |
| | | | 6.63 | | | | SR684 | 126+11.94 | 126+23.10 | | LT/RT | 20992 | |
| | | | 92.41 | | | | SR684 | 126+22.79 | 127+35.00 | | RT | 21008 | |
| | | | 55.35 | | | | SR684 | 127+35.05 | 128+32.93 | | LT/RT | 21039 | |
| | | | 6.51 | | | | SR684 | 128+33.07 | 128+43.94 | | LT/RT | 21053 | |
| | | | 6.50 | | | | SR684 | 128+44.07 | 128+54.94 | | RT | 21062 | |
| | | | 6.50 | | | | SR684 | 128+55.08 | 128+65.95 | | LT/RT | 21071 | |
| | | | 6.50 | | | | SR684 | 128+66.08 | 128+76.95 | | RT | 21080 | |
| | | | 6.49 | | | | SR684 | 128+77.09 | 128+87.95 | | LT/RT | 21089 | |
| | | | 6.49 | | | | SR684 | 128+88.09 | 128+98.96 | | LT/RT | 21098 | |
| | | | 6.49 | | | | SR684 | 128+99.10 | 129+09.96 | | RT | 21107 | |
| | | | 6.49 | | | | SR684 | 129+10.10 | 129+20.97 | | RT | 21116 | |
| | | | 6.49 | | | | SR684 | 129+21.11 | 129+31.97 | | RT | 21125 | |
| | | | 6.49 | | | | SR684 | 129+32.11 | 129+42.98 | | LT/RT | 21134 | |
| | | | 6.49 | | | | SR684 | 129+43.12 | 129+53.98 | | RT | 21143 | |
| | | | 6.48 | | | | SR684 | 129+54.12 | 129+64.99 | | LT/RT | 21152 | |
| | | | 6.48 | | | | SR684 | 129+65.13 | 129+75.99 | | RT | 21161 | |
| | | | 6.48 | | | | SR684 | 129+76.13 | 129+87.00 | | LT/RT | 21170 | |
| | | | 6.48 | | | | SR684 | 129+87.14 | 129+98.00 | | RT | 21179 | |
| | | | 6.48 | | | | SR684 | 129+98.14 | 130+09.00 | | RT | 21188 | |
| | | | 6.48 | | | | SR684 | 130+09.15 | 130+20.01 | | LT/RT | 21206 | |
| | | | 35.34 | | | | SR684 | 130+20.15 | 130+85.93 | | RT | 21197 | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |

Summary of Pavement

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|----------------------|------------------|----------|---|----------------|---|-----------|---------------|-------------|----------------------|------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Location Description | Side | | |
| ... | | | | | | | | | | | | | |

Summary of Curbs

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0520 1 10 | Concrete Curb & Gutter, Type F | LF | 34.2 | | 339 | | SR684 | 124+05.57 | 124+39.85 | LT | 2981 | | |
| | | | 35.1 | | | | SR684 | 124+05.68 | 124+40.10 | LT/RT | 2980 | | |
| | | | 90.0 | | | | SR684 | 127+08.55 | 127+62.28 | LT/RT | 20808 | | |
| | | | 16.0 | | | | SR684 | 127+27.14 | 127+42.86 | RT | 20806 | | |
| | | | 8.0 | | | | SR684 | 127+30.96 | 127+39.11 | LT | 10468 | | |
| | | | 51.3 | | | | SR684 | 127+39.51 | 127+74.96 | LT | 20807 | | |
| | | | 104.4 | | | | SR684 | 130+35.11 | 130+84.46 | LT/RT | 20809 | | |
| 0520 70 | Concrete Traffic Separator, Special - Variable Width | SY | 2.5 | | 76 | | SR684 | 124+39.93 | 124+51.35 | LT | 17742 | | |
| | | | 2.1 | | | | SR684 | 124+52.49 | 124+62.35 | LT | 17747 | | |
| | | | 2.1 | | | | SR684 | 124+63.50 | 124+73.38 | LT | 13504 | | |
| | | | 2.1 | | | | SR684 | 124+74.54 | 124+84.42 | LT | 13582 | | |
| | | | 2.1 | | | | SR684 | 124+85.59 | 124+95.53 | LT | 13577 | | |
| | | | 2.1 | | | | SR684 | 124+96.55 | 125+06.57 | LT | 13572 | | |
| | | | 2.1 | | | | SR684 | 125+07.59 | 125+17.60 | LT | 13513 | | |
| | | | 2.1 | | | | SR684 | 125+18.64 | 125+28.64 | LT | 13518 | | |
| | | | 2.1 | | | | SR684 | 125+29.68 | 125+39.67 | LT | 13524 | | |
| | | | 2.1 | | | | SR684 | 125+40.73 | 125+50.71 | LT | 13529 | | |
| | | | 2.1 | | | | SR684 | 125+51.77 | 125+61.74 | LT | 13534 | | |
| | | | 2.1 | | | | SR684 | 125+62.82 | 125+72.78 | LT | 13540 | | |
| | | | 2.1 | | | | SR684 | 125+73.86 | 125+83.81 | LT | 13545 | | |
| | | | 2.1 | | | | SR684 | 125+84.91 | 125+94.85 | LT | 13550 | | |
| | | | 2.1 | | | | SR684 | 125+95.95 | 126+05.88 | LT | 13556 | | |
| | | | 2.1 | | | | SR684 | 126+07.00 | 126+16.92 | LT | 13561 | | |
| | | | 2.1 | | | | SR684 | 126+18.03 | 126+27.95 | LT | 13567 | | |
| | | | 2.1 | | | | SR684 | 128+28.07 | 128+37.93 | RT | 13718 | | |
| | | | 2.1 | | | | SR684 | 128+39.08 | 128+48.93 | RT | 13723 | | |
| | | | 2.1 | | | | SR684 | 128+50.08 | 128+59.94 | RT | 13728 | | |
| | | | 2.1 | | | | SR684 | 128+61.09 | 128+70.94 | RT | 13734 | | |
| | | | 2.1 | | | | SR684 | 128+72.09 | 128+81.95 | RT | 13739 | | |
| | | | 2.1 | | | | SR684 | 128+83.10 | 128+92.95 | RT | 13744 | | |
| | | | 2.1 | | | | SR684 | 128+94.10 | 129+03.96 | RT | 13750 | | |

Summary of Curbs

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|----------------------|------------------|----------|---|----------------|---|-----------|---------------|-------------|------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| | | | 2.1 | | | | SR684 | 129+05.10 | 129+14.96 | RT | 13755 | | |
| | | | 2.1 | | | | SR684 | 129+16.11 | 129+25.97 | RT | 13761 | | |
| | | | 2.1 | | | | SR684 | 129+27.11 | 129+36.97 | RT | 13766 | | |
| | | | 2.1 | | | | SR684 | 129+38.12 | 129+47.98 | RT | 13772 | | |
| | | | 2.1 | | | | SR684 | 129+49.12 | 129+58.98 | RT | 13778 | | |
| | | | 2.1 | | | | SR684 | 129+60.13 | 129+69.99 | RT | 13784 | | |
| | | | 2.1 | | | | SR684 | 129+71.13 | 129+80.99 | RT | 13789 | | |
| | | | 2.1 | | | | SR684 | 129+82.14 | 129+92.00 | RT | 13794 | | |
| | | | 2.1 | | | | SR684 | 129+93.14 | 130+03.00 | RT | 13799 | | |
| | | | 2.1 | | | | SR684 | 130+04.15 | 130+14.01 | RT | 13804 | | |
| | | | 2.1 | | | | SR684 | 130+15.15 | 130+25.01 | RT | 17769 | | |
| | | | 2.0 | | | | SR684 | 130+26.14 | 130+35.28 | RT | 17766 | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |

Summary of Sidewalk and Detectable Warnings

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|---|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0522 1 | Sidewalk Concrete And Driveways, 4" Thick | SY | 9.8 | | 14 | | SR684 | 127+21.71 | 127+39.71 | LT | 20740 | | |
| | | | 4.1 | | | | SR684 | 127+59.95 | 127+69.79 | LT | 20738 | | |
| 0522 2 | Sidewalk Concrete And Driveways, 6" Thick | SY | 16.4 | | 26 | | SR684 | 127+27.22 | 127+42.82 | RT | 20776 | | |
| | | | 6.5 | | | | SR684 | 127+30.57 | 127+39.48 | LT/RT | 10482 | | |
| | | | 3.6 | | | | SR684 | 127+31.03 | 127+39.05 | LT | 10472 | | |
| 0527 2 | Detectable Warnings | SF | 11.7 | | 41 | | SR684 | 127+30.58 | 127+39.44 | LT | 20782 | | |
| | | | 11.7 | | | | SR684 | 127+30.63 | 127+39.43 | RT | 20792 | | |
| | | | 9.7 | | | | SR684 | 127+31.02 | 127+39.11 | LT | 20777 | | |
| | | | 8.0 | | | | SR684 | 127+33.09 | 127+36.90 | RT | 20799 | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |

Summary of Performance Turf

| Pay Item Number | Pay Item Description | Units of Measure | Length (FT) | Width (FT) | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|-----------------------|------------------|-------------|------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0570 1 2 | Performance Turf, Sod | SY | | | 17.0 | | 105 | | SR684 | 124+05.64 | 124+39.94 | LT | 10496 | | |
| | | | | | 19.6 | | | | SR684 | 127+09.08 | 127+31.94 | LT | 14059 | | |
| | | | | | 1.1 | | | | SR684 | 127+21.68 | 127+26.93 | LT | 21961 | | |
| | | | | | 4.3 | | | | SR684 | 127+21.72 | 127+32.42 | LT | 22006 | | |
| | | | | | 0.9 | | | | SR684 | 127+25.22 | 127+27.12 | RT | 21997 | | |
| | | | | | 3.6 | | | | SR684 | 127+27.23 | 127+42.75 | RT | 21987 | | |
| | | | | | 27.9 | | | | SR684 | 127+38.07 | 127+74.45 | LT/RT | 14074 | | |
| | | | | | 0.9 | | | | SR684 | 127+42.89 | 127+44.76 | RT | 21993 | | |
| | | | | | 0.9 | | | | SR684 | 127+69.84 | 127+71.83 | LT | 21984 | | |
| | | | | | 29.0 | | | | SR684 | 130+35.21 | 130+83.96 | LT/RT | 10499 | | |
| ... | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | | | |

Summary of Signalization Items

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | | |
| 0611 2 1 | ITSFM Location Documentation - Intersection | EA | 1 | | 1 | | SR 684 | 00+00.00 | 00+00.00 | LT/RT | 16024 | |
| 0630 2 11 | Conduit, Furnish & Install, Open Trench | LF | 3.9 | | 132 | | SR684 | 125+98.29 | 126+02.10 | LT | 3931 | |
| | | | 13.1 | | | | SR684 | 126+02.10 | 126+15.57 | LT | 3923 | |
| | | | 12.3 | | | | SR684 | 126+15.57 | 126+22.35 | LT | 3296 | |
| | | | 14.5 | | | | SR684 | 126+16.00 | 126+17.00 | LT | 3512 | |
| | | | 5.5 | | | | SR684 | 126+16.00 | 126+20.53 | LT | 3892 | |
| | | | 3.5 | | | | SR684 | 126+19.95 | 126+22.35 | LT | 15894 | |
| | | | 4.8 | | | | SR684 | 126+92.22 | 126+96.59 | RT | 3354 | |
| | | | 43.9 | | | | SR684 | 126+99.56 | 127+42.23 | RT | 3345 | |
| | | | 3.5 | | | | SR684 | 127+14.14 | 127+16.43 | LT | 3353 | |
| | | | 16.2 | | | | SR684 | 127+26.50 | 127+42.23 | RT | 15585 | |
| | | | 2.8 | | | | SR684 | 127+45.36 | 127+48.18 | LT | 15575 | |
| | | | 3.9 | | | | SR684 | 127+51.02 | 127+54.71 | RT | 16230 | |
| | | | 4.5 | | | | SR684 | 127+51.15 | 127+54.71 | RT | 16002 | |
| 0630 2 12 | Conduit, Furnish & Install, Directional Bore | LF | 338.6 | | 877 | | SR684 | 122+70.50 | 126+17.32 | LT | 3456 | |
| | | | 8.5 | | | | SR684 | 122+78.29 | 122+84.97 | LT | 15667 | |
| | | | 329.3 | | | | SR684 | 122+84.97 | 126+22.35 | LT | 15665 | |
| | | | 80.6 | | | | SR684 | 126+28.59 | 127+11.23 | LT | 3312 | |
| | | | 16.0 | | | | SR684 | 127+17.30 | 127+33.43 | LT | 15588 | |
| | | | 8.1 | | | | SR684 | 127+31.00 | 127+36.56 | LT | 15586 | |
| | | | 49.2 | | | | SR684 | 127+42.34 | 127+42.82 | LT | 3341 | |
| | | | 47.0 | | | | SR684 | 127+45.20 | 127+45.36 | LT/RT | 15574 | |
| 0632 7 1 | Signal Cable, New Or Reconstructed Intersection, Furnish & Install | PI | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | |
| 0632 7 2 | Signal Cable, Repair/Replace/Other, Furnish & Install | LF | 8.5 | | 338 | | SR684 | 122+78.29 | 122+84.97 | LT | 15667 | |
| | | | 329.3 | | | | SR684 | 122+84.97 | 126+22.35 | LT | 15665 | |
| 0633 1121 | Fiber Optic Cable, F&I, Underground, 2-12 Fibers | LF | 100.0 | | 503 | | SR684 | 122+70.47 | 122+70.47 | LT | 3445 | |
| | | | 338.6 | | | | SR684 | 122+70.50 | 126+17.32 | LT | 3456 | |
| | | | 14.5 | | | | SR684 | 126+16.00 | 126+17.00 | LT | 3512 | |
| | | | 50.0 | | | | SR684 | 126+17.00 | 126+17.00 | LT | 3508 | |
| 0633 2 31 | Fiber Optic Connection, Install, Splice | EA | 12 | | 16 | | SR 684 | 00+00.00 | 00+00.00 | LT/RT | 16025 | |
| | | | 4 | | | | SR684 | 122+70.47 | 122+70.47 | LT | 3445 | |

Summary of Signalization Items

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0633 3 12 | Fiber Optic Connection Hardware, F&I, Splice Tray | EA | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | | |
| 0633 3 13 | Fiber Optic Connection Hardware, F&I, Preterminated Connector Assembly | EA | 12 | | 12 | | SR684 | 126+09.84 | 126+22.17 | LT | 15600 | | |
| 0633 3 16 | Fiber Optic Connection Hardware, F&I, Patch Panel, Field Terminated | EA | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | | |
| 0633 3 51 | Fiber Optic Connection Hardware, Adjust/Modify, Splice Enclosure | EA | 1 | | 1 | | SR684 | 122+70.47 | 122+70.47 | LT | 3445 | | |
| 0633 6 | Fiber Optic Cable Locator | DA | 100 | | 100 | | SR684 | 135+02.88 | 135+35.30 | RT | 3538 | | |
| 0635 2 11 | Pull & Splice Box, F&I, 13 X 24 Cover Size | EA | 1 | | 25 | | SR684 | 126+02.10 | 126+02.10 | LT | 3924 | | |
| | | | 1 | | | | SR684 | 126+22.35 | 126+22.35 | LT | 3179 | | |
| | | | 1 | | | | SR684 | 126+25.47 | 126+25.47 | LT | 3186 | | |
| | | | 1 | | | | SR684 | 126+28.59 | 126+28.59 | LT | 15924 | | |
| | | | 1 | | | | SR684 | 126+31.71 | 126+31.71 | LT | 16202 | | |
| | | | 1 | | | | SR684 | 126+96.59 | 126+96.59 | RT | 3207 | | |
| | | | 1 | | | | SR684 | 126+99.56 | 126+99.56 | RT | 3346 | | |
| | | | 1 | | | | SR684 | 127+02.53 | 127+02.53 | RT | 15973 | | |
| | | | 1 | | | | SR684 | 127+11.23 | 127+11.23 | LT | 15938 | | |
| | | | 1 | | | | SR684 | 127+14.34 | 127+14.34 | LT | 3165 | | |
| | | | 1 | | | | SR684 | 127+17.46 | 127+17.46 | LT | 3172 | | |
| | | | 1 | | | | SR684 | 127+20.58 | 127+20.58 | LT | 16209 | | |
| | | | 1 | | | | SR684 | 127+33.43 | 127+33.43 | LT | 16216 | | |
| | | | 1 | | | | SR684 | 127+36.56 | 127+36.56 | LT | 15952 | | |
| | | | 1 | | | | SR684 | 127+39.69 | 127+39.69 | LT | 15577 | | |
| | | | 1 | | | | SR684 | 127+42.23 | 127+42.23 | RT | 3193 | | |
| | | | 1 | | | | SR684 | 127+42.28 | 127+42.28 | RT | 15959 | | |
| | | | 1 | | | | SR684 | 127+42.34 | 127+42.34 | LT | 15553 | | |
| | | | 1 | | | | SR684 | 127+42.82 | 127+42.82 | LT | 15560 | | |
| | | | 1 | | | | SR684 | 127+45.20 | 127+45.20 | RT | 15567 | | |
| | | | 1 | | | | SR684 | 127+45.30 | 127+45.30 | RT | 16245 | | |
| | | | 1 | | | | SR684 | 127+45.36 | 127+45.36 | LT | 15546 | | |
| | | | 1 | | | | SR684 | 127+48.18 | 127+48.18 | RT | 15966 | | |
| | | | 1 | | | | SR684 | 127+51.15 | 127+51.15 | RT | 16223 | | |

Summary of Signalization Items

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|---|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| | | | 1 | | | | SR684 | 127+54.71 | 127+54.71 | RT | 15994 | | |
| 0635 2 12 | Pull & Splice Box, F&I, 24 X 36 Cover Size | EA | 1 | | 1 | | SR684 | 126+17.00 | 126+17.00 | LT | 3508 | | |
| 0635 2 14 | Pull & Splice Box, F&I, 17 X 30 Cover Size | EA | 1 | | 4 | | SR684 | 126+15.57 | 126+15.57 | LT | 3264 | | |
| | | | 1 | | | | SR684 | 126+18.05 | 126+18.05 | LT | 3250 | | |
| | | | 1 | | | | SR684 | 126+19.51 | 126+19.51 | LT | 15917 | | |
| | | | 1 | | | | SR684 | 126+20.53 | 126+20.53 | LT | 3257 | | |
| 0639 1122 | Electrical Power Service, F&I, Underground, Meter Furnished By Contractor | AS | 1 | | 1 | | SR684 | 127+50.76 | 127+50.76 | RT | 16231 | | |
| 0639 2 1 | Electrical Service Wire, Furnish & Install | LF | 3.9 | | 230 | | SR684 | 125+98.29 | 126+02.10 | LT | 16004 | | |
| | | | 13.1 | | | | SR684 | 126+02.10 | 126+15.57 | LT | 16003 | | |
| | | | 12.3 | | | | SR684 | 126+15.57 | 126+22.35 | LT | 16005 | | |
| | | | 80.6 | | | | SR684 | 126+28.59 | 127+11.23 | LT | 16006 | | |
| | | | 16.0 | | | | SR684 | 127+17.30 | 127+33.43 | LT | 16007 | | |
| | | | 49.2 | | | | SR684 | 127+42.34 | 127+42.82 | LT | 16008 | | |
| | | | 47.0 | | | | SR684 | 127+45.20 | 127+45.36 | LT/RT | 16009 | | |
| | | | 3.9 | | | | SR684 | 127+51.02 | 127+54.71 | RT | 16235 | | |
| | | | 4.5 | | | | SR684 | 127+51.15 | 127+54.71 | RT | 16010 | | |
| 0639 3 11 | Electrical Service Disconnect, F&I, Pole Mount | EA | 1 | | 1 | | SR684 | 125+97.80 | 125+98.87 | LT | 16237 | | |
| 0641 2 12 | Prestressed Concrete Pole, F&I, Type P-II Service Pole | EA | 1 | | 2 | | SR684 | 125+98.30 | 125+98.30 | LT | 3921 | | |
| | | | 1 | | | | SR684 | 127+51.00 | 127+51.00 | RT | 16233 | | |
| 0646 1 11 | Aluminum Signals Pole, Furnish & Install, Pedestal | EA | 1 | | 5 | | SR684 | 126+21.82 | 126+21.82 | LT | 2928 | | |
| | | | 1 | | | | SR684 | 127+14.57 | 127+14.57 | LT | 2916 | | |
| | | | 1 | | | | SR684 | 127+26.42 | 127+26.42 | RT | 2904 | | |
| | | | 1 | | | | SR684 | 127+31.08 | 127+31.08 | LT | 2887 | | |
| | | | 1 | | | | SR684 | 127+48.22 | 127+48.22 | LT | 15516 | | |
| 0649 21 23 | Mast Arm Assembly, Furnish & Install, Double Arm 78'-40' | EA | 1 | | 1 | | SR684 | 126+92.22 | 126+92.22 | RT | 15815 | | |
| 0650 1 14 | Vehicular Traffic Signal, Furnish & Install Aluminum, 3 Section, 1 Way | AS | 1 | | 9 | | SR684 | 126+52.35 | 126+52.35 | RT | 3052 | | |
| | | | 1 | | | | SR684 | 126+61.09 | 126+61.09 | RT | 3070 | | |
| | | | 1 | | | | SR684 | 126+91.77 | 126+91.77 | RT | 2991 | | |
| | | | 1 | | | | SR684 | 126+91.78 | 126+91.78 | RT | 3009 | | |
| | | | 1 | | | | SR684 | 126+92.80 | 126+92.80 | RT | 4075 | | |

Summary of Signalization Items

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| | | | 1 | | | | SR684 | 126+92.83 | 126+92.83 | LT | 2966 | | |
| | | | 1 | | | | SR684 | 126+92.84 | 126+92.84 | LT | 2948 | | |
| | | | 1 | | | | SR684 | 127+49.01 | 127+49.01 | LT | 15870 | | |
| | | | 1 | | | | SR684 | 127+49.08 | 127+49.08 | RT | 15522 | | |
| 0650 1 16 | Vehicular Traffic Signal, Furnish & Install Aluminum, 4 Section, 1 Way | AS | 1 | | 1 | | SR684 | 126+91.80 | 126+91.80 | RT | 3029 | | |
| 0653 1 11 | Pedestrian Signal, Furnish & Install Led Countdown, 1 Way | AS | 1 | | 4 | | SR684 | 126+21.82 | 126+21.82 | LT | 2919 | | |
| | | | 1 | | | | SR684 | 127+14.57 | 127+14.57 | LT | 2907 | | |
| | | | 1 | | | | SR684 | 127+26.42 | 127+26.42 | RT | 2895 | | |
| | | | 1 | | | | SR684 | 127+31.08 | 127+31.08 | LT | 2876 | | |
| 0660 3 11 | Vehicle Detector System - Microwave, Furnish & Install, Cabinet Equipment | EA | 1 | | 1 | | SR684 | 126+11.81 | 126+11.81 | LT | 3654 | | |
| 0660 3 12 | Vehicle Detector System - Microwave, Furnish & Install, Above Ground Equipment | EA | 1 | | 5 | | SR684 | 122+74.17 | 122+74.17 | RT | 3606 | | |
| | | | 1 | | | | SR684 | 123+30.32 | 123+30.32 | LT | 15808 | | |
| | | | 1 | | | | SR684 | 129+80.66 | 129+80.66 | RT | 15802 | | |
| | | | 1 | | | | SR684 | 130+69.76 | 130+69.76 | LT | 3618 | | |
| | | | 1 | | | | SR684 | 131+11.18 | 131+11.18 | RT | 3624 | | |
| 0663 1111 | Signal Priority And Preemption System, Furnish & Install, Optical, Cabinet Electronics | EA | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | | |
| 0663 1112 | Signal Priority And Preemption System, Furnish & Install, Optical, Detector | EA | 1 | | 2 | | SR684 | 126+18.98 | 126+18.98 | RT | 3672 | | |
| | | | 1 | | | | SR684 | 127+66.67 | 127+66.67 | LT | 3668 | | |
| 0665 1 11 | Pedestrian Detector, Furnish & Install, Standard | EA | 1 | | 4 | | SR684 | 126+21.82 | 126+21.82 | LT | 2918 | | |
| | | | 1 | | | | SR684 | 127+14.57 | 127+14.57 | LT | 2906 | | |
| | | | 1 | | | | SR684 | 127+26.42 | 127+26.42 | RT | 2894 | | |
| | | | 1 | | | | SR684 | 127+31.08 | 127+31.08 | LT | 2893 | | |
| 0670 5300 | Traffic Controller Assembly, Install | AS | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | | |
| 0671 2 40 | Traffic Controller Without Cabinet, Modify | EA | 1 | | 1 | | SR 684 | 00+00.00 | 00+00.00 | LT/RT | 15408 | | |
| 0682 1113 | ITS CCTV Camera, F&I, Dome Ptz, Pressurized, Ip, High Definition | EA | 1 | | 1 | | SR684 | 126+89.83 | 126+89.83 | RT | 4143 | | |
| 0684 1 1 | Managed Field Ethernet Switch, Furnish & Install | EA | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | | |

Summary of Signalization Items

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0685 1 13 | Uninterruptible Power Supply, Furnish And Install, Line Interactive With Cabinet | EA | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | | |
| 0685 2 1 | Remote Power Management Unit- Rpmu, Furnish And Install | EA | 1 | | 1 | | SR684 | 126+13.05 | 126+13.05 | LT | 3237 | | |
| 0700 3201 | Sign Panel, Furnish & Install Overhead Mount, Up To 12 SF | EA | 1 | | 2 | | SR684 | 126+65.53 | 126+65.53 | RT | 15867 | | |
| | | | 1 | | | | SR684 | 126+90.40 | 126+90.40 | LT | 14947 | | |
| 0700 5 22 | Internally Illuminated Sign, F&I, Overhead Mount, 12 - 18 SF | EA | 1 | | 2 | | SR684 | 126+80.46 | 126+90.20 | RT | 15722 | | |
| | | | 1 | | | | SR684 | 126+92.21 | 126+92.23 | RT | 15721 | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |

Summary of Signing and Pavement Marking

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|---|------------------|----------|---|----------------|---|-----------|---------------|-------------|------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| 0700 1111 | Single Column Ground Sign Assembly, F&I Ground Mount, Less Than 12 SF | EA | 1 | | 9 | | SR684 | 123+89.18 | 123+89.18 | LT | 27708 | | |
| | | | 1 | | | | SR684 | 124+21.32 | 124+21.32 | LT | 25035 | | |
| | | | 1 | | | | SR684 | 127+29.78 | 127+29.78 | RT | 25166 | | |
| | | | 1 | | | | SR684 | 127+61.17 | 127+61.17 | RT | 14950 | | |
| | | | 1 | | | | SR684 | 127+65.50 | 127+65.50 | LT | 21947 | | |
| | | | 1 | | | | SR684 | 127+94.69 | 127+94.69 | RT | 2595 | | |
| | | | 1 | | | | SR684 | 130+75.26 | 130+75.26 | RT | 21163 | | |
| | | | 1 | | | | SR684 | 130+76.96 | 130+76.96 | LT | 21322 | | |
| | | | 1 | | | | SR684 | 130+79.95 | 130+79.95 | LT | 2877 | | |
| 0700 1600 | Single Column Ground Sign Assembly, Remove | EA | 1 | | 3 | | SR684 | 125+83.97 | 125+83.97 | LT | 1705 | | |
| | | | 1 | | | | SR684 | 126+35.87 | 126+35.87 | LT | 1694 | | |
| | | | 1 | | | | SR684 | 127+94.40 | 127+94.40 | RT | 2598 | | |
| 0700 1914 | Single Column Ground Sign Assembly, F&I Cantilever Ground Mount, 30.1+ SF | EA | 1 | | 2 | | SR684 | 123+63.51 | 123+63.51 | RT | 29691 | | |
| | | | 1 | | | | SR684 | 130+91.24 | 130+91.24 | LT | 29690 | | |
| 0705 10 1 | Object Marker, Type 1 | EA | 1 | | 1 | | SR684 | 130+79.95 | 130+79.95 | LT | 28606 | | |
| 0705 11 1 | Delineator, Flexible Tubular | EA | 1 | | 25 | | SR684 | 124+44.56 | 124+44.56 | LT | 29256 | | |
| | | | 1 | | | | SR684 | 124+57.06 | 124+57.06 | LT | 29249 | | |
| | | | 1 | | | | SR684 | 124+68.40 | 124+68.40 | LT | 29242 | | |
| | | | 1 | | | | SR684 | 124+79.66 | 124+79.66 | LT | 29235 | | |
| | | | 1 | | | | SR684 | 124+89.92 | 124+89.92 | LT | 29228 | | |
| | | | 1 | | | | SR684 | 125+01.64 | 125+01.64 | LT | 29221 | | |
| | | | 1 | | | | SR684 | 125+12.26 | 125+12.26 | LT | 29214 | | |
| | | | 1 | | | | SR684 | 125+23.66 | 125+23.66 | LT | 29207 | | |
| | | | 1 | | | | SR684 | 125+34.87 | 125+34.87 | LT | 29200 | | |
| | | | 1 | | | | SR684 | 125+45.61 | 125+45.61 | LT | 29193 | | |
| | | | 1 | | | | SR684 | 125+56.62 | 125+56.62 | LT | 29186 | | |
| | | | 1 | | | | SR684 | 125+67.61 | 125+67.61 | LT | 29179 | | |
| | | | 1 | | | | SR684 | 125+78.65 | 125+78.65 | LT | 29172 | | |
| | | | 1 | | | | SR684 | 125+90.01 | 125+90.01 | LT | 29165 | | |
| | | | 1 | | | | SR684 | 126+01.84 | 126+01.84 | LT | 29158 | | |

Summary of Signing and Pavement Marking

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| | | | 1 | | | | SR684 | 126+11.85 | 126+11.85 | LT | 29151 | | |
| | | | 1 | | | | SR684 | 126+22.77 | 126+22.77 | LT | 29144 | | |
| | | | 1 | | | | SR684 | 127+55.77 | 127+55.77 | LT | 15423 | | |
| | | | 1 | | | | SR684 | 127+60.78 | 127+60.78 | LT | 15416 | | |
| | | | 1 | | | | SR684 | 127+65.78 | 127+65.78 | LT | 15409 | | |
| | | | 1 | | | | SR684 | 127+70.78 | 127+70.78 | LT | 15402 | | |
| | | | 1 | | | | SR684 | 127+77.88 | 127+77.88 | LT | 15372 | | |
| | | | 1 | | | | SR684 | 127+82.90 | 127+82.90 | LT | 15374 | | |
| | | | 1 | | | | SR684 | 127+87.91 | 127+87.91 | LT | 15381 | | |
| | | | 1 | | | | SR684 | 127+92.92 | 127+92.92 | LT | 15388 | | |
| 0706 1 3 | Raised Pavement Marker, Type B | EA | 90 | | 90 | | SR684 | 124+05.93 | 130+60.44 | LT | 15527 | | |
| 0710 12290 | Painted Pavement Markings, Durable Paint, Yellow, Island Nose | SF | 1.6 | | 17 | | SR684 | 126+27.06 | 126+27.48 | LT | 29480 | | |
| | | | 14.1 | | | | SR684 | 127+08.55 | 127+12.93 | LT | 29296 | | |
| | | | 1.6 | | | | SR684 | 128+28.58 | 128+28.93 | RT | 29523 | | |
| 0710 90 | Painted Pavement Markings, Final Surface | LS | 1 | | 1 | | SR684 | 122+30.92 | 122+30.92 | LT | 9181 | | |
| 0711 11123 | Thermoplastic, Standard, White, Solid, 12 For Crosswalk And Roundabout | LF | 99.6 | | 273 | | SR684 | 126+14.97 | 127+16.38 | LT | 25206 | | |
| | | | 65.4 | | | | SR684 | 126+35.66 | 127+02.60 | LT | 25207 | | |
| | | | 27.1 | | | | SR684 | 127+29.91 | 127+29.98 | LT | 8524 | | |
| | | | 26.8 | | | | SR684 | 127+30.02 | 127+30.08 | RT | 8522 | | |
| | | | 26.9 | | | | SR684 | 127+39.92 | 127+39.98 | RT | 8521 | | |
| | | | 27.3 | | | | SR684 | 127+40.02 | 127+40.09 | LT | 8523 | | |
| 0711 11125 | Thermoplastic, Standard, White, Solid, 24 For Stop Line And Crosswalk | LF | 36.8 | | 97 | | SR684 | 126+27.00 | 126+27.01 | LT/RT | 8502 | | |
| | | | 22.1 | | | | SR684 | 126+38.66 | 126+61.33 | LT | 8581 | | |
| | | | 27.5 | | | | SR684 | 127+62.13 | 127+62.24 | LT | 10254 | | |
| | | | 10.5 | | | | SR684 | 128+29.00 | 128+29.06 | LT/RT | 14875 | | |
| 0711 11141 | Thermoplastic, Standard, White, 2-4 Dotted Guideline/ 6-10 Gap Extension, 6" | GM | 0.0236 | | 0.095 | | SR684 | 124+05.57 | 125+31.94 | LT | 8456 | | |
| | | | 0.0161 | | | | SR684 | 124+06.09 | 124+90.88 | RT | 25019 | | |
| | | | 0.0284 | | | | SR684 | 127+62.16 | 129+13.02 | LT | 8455 | | |
| | | | 0.0263 | | | | SR684 | 129+46.94 | 130+86.00 | RT | 8447 | | |

Summary of Signing and Pavement Marking

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| | | | 0.0004 | | | | SR684 | 130+90.70 | 130+92.94 | RT | 20507 | | |
| 0711 11170 | Thermoplastic, Standard, White, Arrow | EA | 1 | | 4 | | SR684 | 125+05.84 | 125+05.84 | RT | 14256 | | |
| | | | 1 | | | | SR684 | 125+96.92 | 125+96.92 | RT | 8704 | | |
| | | | 1 | | | | SR684 | 128+59.68 | 128+59.68 | LT | 8630 | | |
| | | | 1 | | | | SR684 | 129+69.85 | 129+69.85 | LT | 8644 | | |
| 0711 11224 | Thermoplastic, Standard, Yellow, Solid, 18 For Diagonal Or Chevrons | LF | 2.8 | | 40 | | SR684 | 126+60.00 | 126+61.88 | LT | 8575 | | |
| | | | 24.2 | | | | SR684 | 126+61.59 | 126+77.90 | LT | 8576 | | |
| | | | 12.9 | | | | SR684 | 126+70.26 | 126+78.92 | LT | 8577 | | |
| 0711 11241 | Thermoplastic, Standard, Yellow, 2-4 Dotted Guide Line /6-10 Dotted Extension Line, 6" | GM | 0.0117 | | 0.038 | | SR684 | 126+27.63 | 126+75.93 | LT | 21438 | | |
| | | | 0.0137 | | | | SR684 | 126+61.73 | 127+13.00 | LT/RT | 14885 | | |
| | | | 0.0128 | | | | SR684 | 127+62.28 | 128+29.45 | RT | 24604 | | |
| 0711 14125 | Thermoplastic, Preformed, White, Solid, 24 For Crosswalk | LF | 10.0 | | 180 | | SR684 | 126+38.76 | 126+39.02 | LT | 14910 | | |
| | | | 10.0 | | | | SR684 | 126+45.71 | 126+45.94 | LT | 14909 | | |
| | | | 10.0 | | | | SR684 | 126+52.66 | 126+52.85 | LT | 14908 | | |
| | | | 10.0 | | | | SR684 | 126+59.61 | 126+59.76 | LT | 14907 | | |
| | | | 10.0 | | | | SR684 | 126+66.56 | 126+66.68 | LT | 14906 | | |
| | | | 10.0 | | | | SR684 | 126+74.21 | 126+74.29 | LT | 14905 | | |
| | | | 10.0 | | | | SR684 | 126+81.17 | 126+81.20 | LT | 14904 | | |
| | | | 10.0 | | | | SR684 | 126+88.12 | 126+88.12 | LT | 14898 | | |
| | | | 10.0 | | | | SR684 | 126+95.04 | 126+95.07 | LT | 14902 | | |
| | | | 10.0 | | | | SR684 | 127+01.96 | 127+02.03 | LT | 14899 | | |
| | | | 10.0 | | | | SR684 | 127+29.93 | 127+40.07 | LT | 8555 | | |
| | | | 10.0 | | | | SR684 | 127+29.94 | 127+40.06 | LT | 8557 | | |
| | | | 10.0 | | | | SR684 | 127+29.96 | 127+40.04 | LT | 8554 | | |
| | | | 10.0 | | | | SR684 | 127+29.97 | 127+40.03 | LT | 8558 | | |
| | | | 10.0 | | | | SR684 | 127+30.03 | 127+39.97 | RT | 8829 | | |
| | | | 10.0 | | | | SR684 | 127+30.04 | 127+39.96 | RT | 8824 | | |
| | | | 10.0 | | | | SR684 | 127+30.06 | 127+39.94 | RT | 8828 | | |
| | | | 10.0 | | | | SR684 | 127+30.07 | 127+39.93 | RT | 8825 | | |
| 0711 14160 | Thermoplastic, Preformed, White, Message | EA | 1 | | 3 | | SR684 | 126+07.53 | 126+07.53 | LT | 8777 | | |

Summary of Signing and Pavement Marking

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|--|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| | | | 1 | | | | SR684 | 128+13.98 | 128+13.98 | RT | 20668 | | |
| | | | 1 | | | | SR684 | 129+36.97 | 129+36.97 | LT | 8796 | | |
| 0711 14170 | Thermoplastic, Preformed, White, Arrow | EA | 1 | | 3 | | SR684 | 125+95.38 | 125+95.38 | LT | 8768 | | |
| | | | 1 | | | | SR684 | 128+25.83 | 128+25.83 | RT | 20687 | | |
| | | | 1 | | | | SR684 | 129+25.01 | 129+25.01 | LT | 8815 | | |
| 0711 16101 | Thermoplastic, Standard, Other Surfaces, White, Solid, 6 | GM | 0.0153 | | 0.212 | | SR684 | 124+05.57 | 124+86.97 | LT | 8553 | | |
| | | | 0.0225 | | | | SR684 | 124+76.83 | 125+94.00 | RT | 8464 | | |
| | | | 0.0259 | | | | SR684 | 124+90.88 | 126+27.00 | RT | 8503 | | |
| | | | 0.0188 | | | | SR684 | 125+28.45 | 126+27.01 | RT | 8510 | | |
| | | | 0.0145 | | | | SR684 | 125+36.00 | 126+13.61 | LT | 8498 | | |
| | | | 0.0063 | | | | SR684 | 125+94.00 | 126+27.01 | RT | 8446 | | |
| | | | 0.0189 | | | | SR684 | 127+62.20 | 128+62.72 | LT | 8549 | | |
| | | | 0.0256 | | | | SR684 | 128+08.19 | 129+42.94 | RT | 8465 | | |
| | | | 0.0295 | | | | SR684 | 128+29.06 | 129+84.85 | LT | 8551 | | |
| | | | 0.0343 | | | | SR684 | 129+13.02 | 130+94.12 | LT | 8499 | | |
| 0711 16102 | Thermoplastic, Standard, Other Surfaces, White, Solid, 8 | GM | 0.0104 | | 0.010 | | SR684 | 127+74.87 | 128+29.04 | LT/RT | 14876 | | |
| 0711 16131 | Thermoplastic, Standard-Other Surfaces, White, Skip, 6", 10-30 Skip Or 3-9 Lane Drop | GM | 0.0211 | | 0.160 | | SR684 | 124+05.57 | 125+15.93 | RT | 8517 | | |
| | | | 0.0263 | | | | SR684 | 124+86.97 | 126+27.00 | LT | 8484 | | |
| | | | 0.0690 | | | | SR684 | 127+39.95 | 131+03.68 | RT | 14532 | | |
| | | | 0.0009 | | | | SR684 | 128+27.57 | 128+28.95 | RT | 10310 | | |
| | | | 0.0423 | | | | SR684 | 128+62.72 | 130+86.05 | LT | 8541 | | |
| 0711 16201 | Thermoplastic, Standard, Other Surfaces, Yellow, Solid, 6 | GM | 0.0419 | | 0.236 | | SR684 | 124+05.57 | 126+27.57 | LT | 8564 | | |
| | | | 0.0067 | | | | SR684 | 124+06.09 | 124+40.47 | LT/RT | 8567 | | |
| | | | 0.0030 | | | | SR684 | 124+40.47 | 124+56.03 | LT | 8566 | | |
| | | | 0.0324 | | | | SR684 | 124+56.03 | 126+27.57 | LT | 8565 | | |
| | | | 0.0044 | | | | SR684 | 126+57.93 | 126+59.86 | LT | 8568 | | |
| | | | 0.0030 | | | | SR684 | 126+59.57 | 126+60.88 | LT | 8572 | | |
| | | | 0.0029 | | | | SR684 | 126+59.94 | 126+70.67 | LT | 8569 | | |
| | | | 0.0026 | | | | SR684 | 126+60.97 | 126+70.53 | LT | 8571 | | |
| | | | 0.0026 | | | | SR684 | 126+70.59 | 126+78.95 | LT | 8570 | | |
| | | | 0.0029 | | | | SR684 | 126+70.68 | 126+79.98 | LT | 8578 | | |

Summary of Signing and Pavement Marking

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | | Design Notes | Construction Remarks |
|-----------------|----------------------|------------------|----------|---|----------------|---|-----------|---------------|-------------|-------|------------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | Element ID | | |
| | | | 0.0034 | | | | SR684 | 126+77.63 | 126+78.93 | LT | 8580 | | |
| | | | 0.0044 | | | | SR684 | 126+78.29 | 126+79.96 | LT | 8579 | | |
| | | | 0.0032 | | | | SR684 | 127+13.00 | 127+30.02 | RT | 20603 | | |
| | | | 0.0032 | | | | SR684 | 127+13.03 | 127+29.98 | LT | 10308 | | |
| | | | 0.0168 | | | | SR684 | 127+40.02 | 128+29.11 | LT | 20604 | | |
| | | | 0.0069 | | | | SR684 | 127+40.07 | 127+74.83 | RT | 10306 | | |
| | | | 0.0009 | | | | SR684 | 128+27.57 | 128+28.95 | RT | 10313 | | |
| | | | 0.0475 | | | | SR684 | 128+28.99 | 130+79.96 | RT | 8563 | | |
| | | | 0.0362 | | | | SR684 | 128+29.00 | 130+20.00 | RT | 8561 | | |
| | | | 0.0096 | | | | SR684 | 130+20.00 | 130+69.90 | LT/RT | 8562 | | |
| | | | 0.0019 | | | | SR684 | 130+69.90 | 130+80.00 | LT | 9199 | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |
| ... | | | | | | | | | | | | | |

Summary of Lighting Items

| Pay Item Number | Pay Item Description | Units of Measure | Quantity | | Total Quantity | | Location | | | | Design Notes | Construction Remarks |
|-----------------|---|------------------|----------|---|----------------|---|-----------|---------------|-------------|------|--------------|----------------------|
| | | | P | F | P | F | Alignment | Begin Station | End Station | Side | | |
| 0630 2 11 | Conduit, Furnish & Install, Open Trench | LF | 10.9 | | 48 | | SR684 | 126+22.30 | 126+33.51 | LT | | |
| | | | 14.1 | | | | SR684 | 127+25.54 | 127+38.03 | LT | | |
| | | | 23.1 | | | | SR684 | 127+41.25 | 127+64.83 | LT | | |
| 0635 2 11 | Pull & Splice Box, F&I, 13 X 24 Cover Size | EA | 1 | | 4 | | SR684 | 126+34.19 | 126+34.19 | LT | | |
| | | | 1 | | | | SR684 | 127+23.12 | 127+23.12 | LT | | |
| | | | 1 | | | | SR684 | 127+24.02 | 127+24.02 | LT | | |
| | | | 1 | | | | SR684 | 127+65.02 | 127+65.02 | LT | | |
| 0715 1 12 | Lighting Conductors, F&I, Insulated, No.8 - 6 | LF | 428.0 | | 1284 | | SR684 | 124+09.60 | 128+81.56 | LT | | |
| | | | 428.0 | | | | SR684 | 124+09.60 | 128+81.56 | LT | | |
| | | | 428.0 | | | | SR684 | 124+09.60 | 128+81.56 | LT | | |
| 0715 1 13 | Lighting Conductors, F&I, Insulated, No 4 To No 2 | LF | 288.0 | | 864 | | SR684 | 124+88.39 | 128+10.46 | LT | | |
| | | | 288.0 | | | | SR684 | 124+88.39 | 128+10.46 | LT | | |
| | | | 288.0 | | | | SR684 | 124+88.39 | 128+10.46 | LT | | |
| 0715 5 31 | Luminaire & Bracket Arm- Aluminum, Furnish & Install New Luminaire And Arm On New/Existing Pole | EA | 1 | | 1 | | SR684 | 126+92.14 | 126+92.14 | RT | | |
| 0715 61252 | Light Pole Complete, F&I, Standard Pole, Standard Foundation, 35' Mounting Height, 15' Arm Length | EA | 1 | | 3 | | SR684 | 126+40.32 | 126+40.32 | LT | | |
| | | | 1 | | | | SR684 | 127+19.15 | 127+19.15 | LT | | |
| | | | 1 | | | | SR684 | 127+65.22 | 127+65.22 | LT | | |
| 0715 69000 | Light Pole Complete, Remove Pole and Foundation | EA | 1 | | 1 | | SR684 | 127+26.30 | 127+26.30 | LT | | |
| 0715500 1 | Pole Cable Distribution System, Furnish And Install, Conventional | EA | 1 | | 3 | | SR684 | 126+40.32 | 126+40.32 | LT | | |
| | | | 1 | | | | SR684 | 127+19.15 | 127+19.15 | LT | | |
| | | | 1 | | | | SR684 | 127+65.22 | 127+65.22 | LT | | |
| ... | | | | | | | | | | | | |
| ... | | | | | | | | | | | | |
| ... | | | | | | | | | | | | |