

SUMMARY OF VERIFIED UTILITIES


GENERAL NOTES

SURVEYOR'S NOTES:

1. SPECIFIC PURPOSE SURVEY TO RECORD THE LOCATION OF SPECIFIC SUBSURFACE UTILITIES AT VARIOUS LOCATIONS ALONG STATE ROAD 78 FROM BRIDGE #910094 TO U.S. 98, OKEECHOBEE COUNTY, FLORIDA
2. PREPARED FOR THE EXCLUSIVE BENEFIT OF: FLORIDA DEPARTMENT OF TRANSPORTATION.
3. SURVEY DATE: FEBRUARY 2023 TO JUNE 2023.
4. COORDINATES AND ELEVATIONS WERE TIED TO THE FLORIDA PERMANENT REFERENCE NETWORK (FPRN). THE HORIZONTAL DATUM IS RELATIVE TO THE FLORIDA STATE PLANE COORDINATE SYSTEM, EAST ZONE, NORTH AMERICAN DATUM OF 1983 - ADJUSTMENT OF 2011 (NAD 83/11), U.S. SURVEY FEET. THE VERTICAL DATUM IS RELATIVE TO THE NORTH AMERICAN VERTICAL DATUM OF 1988 (NAVD88).
5. THIS REPORT CONTAINS SUBSURFACE UTILITIES PHYSICALLY EXPOSED BY VACUUM EXCAVATION (VVH)
6. SURFACE ELEVATIONS ARE VALID AT THE DATE OF THIS SURVEY ONLY AS SURFACE GRADE CONDITIONS MAY CHANGE OVER TIME.
7. SUBSURFACE UTILITIES WERE LOCATED BY UTILIZING THE VACTRON SYSTEM FOR VACUUM EXCAVATION WITH THE BENEFIT OF ELECTRONIC DESIGNATION AND GROUND PENETRATING RADAR (GPR).
8. UTILIZATION OF THE ABOVE EQUIPMENT AND METHODS IS THE INDUSTRY RECOGNIZED PROCEDURE FOR FINDING AND LOCATING UNDERGROUND UTILITIES. ALTHOUGH EFFECTIVE AND RELIABLE, THERE IS THE POSSIBILITY THAT ALL UTILITIES MAY NOT BE DETECTED DUE TO ENVIRONMENTAL CONDITIONS, SOIL CONDITIONS, WATER TABLE, EXCESSIVE DEPTH, AND/OR FEATURE MAKEUP.
9. UTILITY SIZE AND MATERIAL COMPOSITION WERE COLLECTED BY FIELD OBSERVATION UNDER ADVERSE CONDITIONS AND SHOULD BE CONSIDERED APPROXIMATE.
10. NOMINAL UTILITY SIZES HAVE BEEN REPORTED AND ARE BASED ON THE APPROXIMATE OUTSIDE DIAMETER UNLESS OTHERWISE SPECIFIED.
11. UTILITY OWNER'S NAMES USED IN THIS REPORT REFLECT INFORMATION OBTAINED FROM FIELD OBSERVATIONS, FIELD MEETINGS, AND UTILITY RESEARCH AND MAY NOT REFLECT ACTUAL OWNERSHIP.
12. THE SURROUNDING UTILITIES SHOWN AS ELECTRONIC DESIGNATION, AND OTHER VVH HOLES SHOWN IN THIS REPORT AND ELECTRONIC FILE REPRESENTING THE MAP OF SURVEY, MUST BE CAREFULLY CONSIDERED PRIOR TO THE DESIGN AND/OR PLACEMENT OF PROPOSED STRUCTURES.

LEGEND:

- B/L = BASE LINE
- C/L = CENTER LINE
- DBC = DIRECT BURIED CABLE
- DIP = DUCTILE IRON PIPE
- ELEC. = ELECTRIC
- F.A.C. = FLORIDA ADMINISTRATIVE CODE
- FDOT = FLORIDA DEPARTMENT OF TRANSPORTATION
- ID = IDENTIFICATION
- LB = LICENSED BUSINESS
- LT. = LEFT
- N/A = NOT APPLICABLE
- NFV = NOT FIELD VERIFIED
- No. = NUMBER
- P.L.S. = PROFESSIONAL LAND SURVEYOR
- PVC = POLYVINYL CHLORIDE PIPE
- RCP = REINFORCED CONCRETE PIPE
- RT. = RIGHT
- SR = STATE ROAD
- UNK. = UNKNOWN
- VVH = VERIFIED VERTICAL AND HORIZONTAL

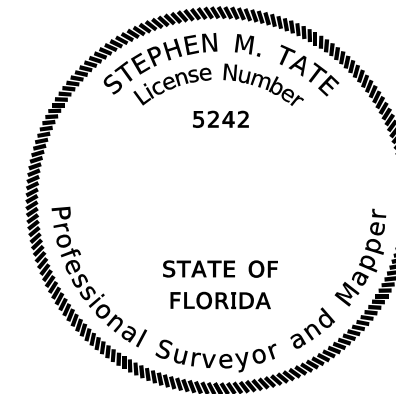

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY

ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

SAM SURVYEING AND MAPPING, LLC.
 108 W. COUNTRY CLUB DR.
 TAMPA, FLORIDA 33612
 CERTIFICATE OF AUTHORIZATION: 7908
 STEPHEN M. TATE, P.L.S. NO. 5242

THE ABOVE NAMED PROFESSIONAL LAND SURVEYOR SHALL BE RESPONSIBLE FOR THE FOLLOWING SHEETS IN ACCORDANCE WITH RULE 5J-17.062, F.A.C.

ROADWAY PLANS

SHEET NO.	SHEET DESCRIPTION
UTV-1	SIGNATURE SHEET, GENERAL NOTES
UTV-2	SUMMARY OF VERIFIED UTILITIES

7/11/2023 10:22:13 AM Ryan.Bourfard \\saminc\TAM\PROJECTS\1023076705\100\SUE\04\Survey\Data\JOBfiles\SBVHUW01-ORD.dgn

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 5J-17.062, F.A.C.

REVISIONS				STEPHEN M. TATE, P.S.M. PLS LICENSE NUMBER 5242 SAM SURVEYING AND MAPPING, LLC 108 W. COUNTRY CLUB DR. TAMPA, FL 33612	STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SIGNATURE SHEET GENERAL NOTES	SHEET NO.
DATE	DESCRIPTION	DATE	DESCRIPTION		ROAD NO.	COUNTY	FINANCIAL PROJECT ID		UTV-1
						SR 78	OKEECHOBEE		448975-1-52-01

SUMMARY OF VERIFIED UTILITIES

Vvh #	UTILITY DESCRIPTION (Owner, type)	SIZE	MATERIALS	Ø and/or C			EXISTING GROUND ELEVATION	TOP ELEVATION	COMMENTS
				NORTHING	EASTING	LT/RT			
TH1	OKEECHOBEE UTILITY AUTHORITY, WATER	NFV	NFV	1037544.808	704472.851		22.14	17.98	COULD NOT VISUALIZE, WATER PROBED AND BELIEVED TO HAVE FOUND WATER LINE
TH2	OKEECHOBEE UTILITY AUTHORITY, WATER	6"	DIP	1037604.400	704488.510		21.37	17.46	
TH3	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1037767.037	704611.576		19.81	17.47	W/ BLUE WARNING TAPE
TH4	CENTURYLINK, FIBER OPTIC	0.75"	DBC	1037900.043	704690.925		15.94	11.85	
TH5	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1037984.772	704729.483		19.19	15.63	W/ BLUE WARNING TAPE
TH6	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1038147.769	704844.540		18.64	14.73	W/ BLUE WARNING TAPE
TH7	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1038311.543	704962.828		18.44	15.10	W/ BLUE WARNING TAPE
TH8	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1038471.666	705079.830		18.39	15.07	W/ BLUE WARNING TAPE
TH9	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1038634.274	705196.790		18.66	15.33	
TH10	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1038793.035	705313.211		18.29	14.59	
TH11	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1038956.687	705432.839		18.27	15.22	W/ BLUE WARNING TAPE
TH12	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1039117.126	705551.308		17.99	14.23	W/ BLUE WARNING TAPE
TH13	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1039274.077	705672.735		17.77	14.45	W/ BLUE WARNING TAPE
TH14	CENTURYLINK, FIBER OPTIC	N/A	N/A	1039391.198	705797.262		15.96	N/A	DUG TO 4.5' R.D. READING SAID 4'7"
TH15	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1039413.048	705811.969		17.60	13.72	W/ BLUE WARNING TAPE
TH16	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1039507.504	705940.468		17.61	14.65	
TH17	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	PVC	1040099.299	709021.087		18.41	14.85	
TH18	CENTURYLINK, TELECOM / FIBER OPTIC	0.75"	DBC	1040108.859	709084.907		17.43	13.41	W/ ORANGE WARNING TAPE SPRINT/CENTURYLINK
TH19	OKEECHOBEE UTILITY AUTHORITY, WATER	24"	PVC	1040163.884	709084.806		18.71	14.73	
TH20	CENTURYLINK, TELECOM / FIBER OPTIC	1"	DBC	1040179.475	709113.329		18.12	15.03	1" EAST OF TH#20, 2" STEEL PIPE UNKNOWN M.D. = 2.74
TH21	CENTURYLINK, TELECOM / FIBER OPTIC	0.75"	DBC	1040126.643	709159.228		17.28	13.49	SPRINT/CENTURY LINK
TH22	OKEECHOBEE UTILITY AUTHORITY, WATER	N/A	N/A	1040172.102	709265.689		18.75	N/A	WATER PROBED TO 9' DIDN'T ENCOUNTER WATER LINE.
TH23	FLORIDA POWER & LIGHT, ELECTRIC	0.5"	DBC	1040164.998	709277.512		18.05	15.72	
TH24	CENTURYLINK, TELECOM / FIBER OPTIC	1"	DBC	1040246.286	709336.372		17.50	14.08	1/2" DBC M.D. = 3.20, TH MOVED DUE TO BRUSH PILE
TH24A	CENTURYLINK, TELECOM / FIBER OPTIC	1"	DBC	1040280.048	709441.640		18.90	15.68	SPRINT/CENTURY LINK, TH MOVED DUE TO BRUSH PILE
TH25	OKEECHOBEE UTILITY AUTHORITY, WATER	24"	PVC	1040243.347	709340.299		18.07	14.06	W/ BLUE WARNING TAPE. TH MOVED DUE TO BRUSH PILE
TH25A	OKEECHOBEE UTILITY AUTHORITY, WATER	24"	PVC	1040275.862	709445.105		18.89	15.56	W/ BLUE WARNING TAPE. TH MOVED DUE TO BRUSH PILE
TH26	OKEECHOBEE UTILITY AUTHORITY, WATER	8"	STEEL	1040701.574	710551.023		17.73	13.66	
TH28	CENTER 7' TRENCH	N/A	N/A	1040901.604	710829.480		18.38	N/A	DUG 7' TRENCH, DUG TO 6' DEPTH, WATER PROBED TO 9', UTILITES FOUND
TH29	OKEECHOBEE UTILITY AUTHORITY, WATER	24"	DIP	1040901.860	710827.786		18.04	14.62	
TH30	CENTURYLINK, TELECOM / FIBER OPTIC	1"	DBC	1040902.916	710827.437		17.92	14.71	SPRINT/CENTURY LINK

7/11/2023 10:22:14 AM Ryan.Bourfard \\saminc\TAM\PROJECTS\1023076705\100_SUE_04\Survey\Data\JOBfiles\SB\HJW01-ORD.dgn

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 51-17.062, F.A.C.

<p align="center">REVISIONS</p> <table border="1"> <thead> <tr> <th>DATE</th> <th>DESCRIPTION</th> <th>DATE</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>				DATE	DESCRIPTION	DATE	DESCRIPTION					<p>STEPHEN M. TATE, P.S.M. PLS LICENSE NUMBER 5242 SAM SURVEYING AND MAPPING, LLC 108 W. COUNTRY CLUB DR. TAMPA, FL 33612</p>			<p align="center">STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION</p> <table border="1"> <thead> <tr> <th>ROAD NO.</th> <th>COUNTY</th> <th>FINANCIAL PROJECT ID</th> </tr> </thead> <tbody> <tr> <td>SR 78</td> <td>OKEECHOBEE</td> <td>448975-1-52-01</td> </tr> </tbody> </table>			ROAD NO.	COUNTY	FINANCIAL PROJECT ID	SR 78	OKEECHOBEE	448975-1-52-01	<p align="center">SUMMARY OF VERIFIED UTILITIES</p>		<p>SHEET NO. UTV-2</p>
DATE	DESCRIPTION	DATE	DESCRIPTION																							
ROAD NO.	COUNTY	FINANCIAL PROJECT ID																								
SR 78	OKEECHOBEE	448975-1-52-01																								