


ESTIMATED QUANTITIES REPORT

Financial Project ID: 414511-3-52-01

Contract Number: TBD

Project Description: SR 700 (US 98) from east of SR 25 (US 27) to east of Floral Dr

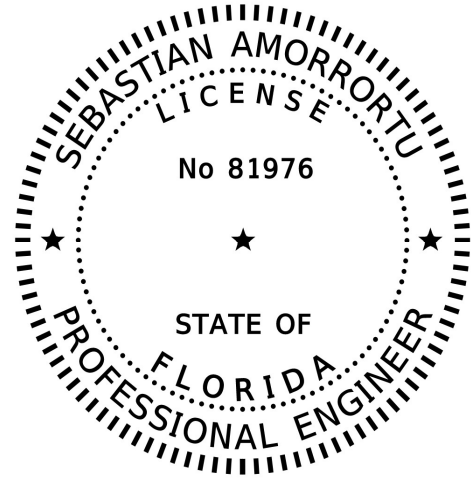

This item has been digitally signed and sealed by:

on the date adjacent to the seal.

Signature must be verified on any electronic copies.

HNTB Corporation
201 N. Franklin St. Ste. 1200
Tampa, FL 33602
Sebastian Amorrortu, P.E. No. 81976

The estimated quantities contained in this document:

1. Were developed in compliance with Florida Department of Transportation procedures, processes, and requirements, and relies on each component Engineer of Record to have done the same.
2. Contain no known errors or omissions.
3. Match the pay item numbers and quantities in Designer Interface for AASHTOWare Project Preconstruction™.

Summary of Lump Sum Items

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Design Notes	Construction Remarks
			P	F	P	F		
0101 1	Mobilization	LS/LS	1.0		1			
...								
...								
...								

Summary of Temporary Traffic Control Plan Items														
Pay Item Number	Pay Item Description	Units of Measure	Number Required	Duration (Days)	Quantity		Total Quantity		Secondary Quantity			Location	Design Notes	Construction Remarks
					P	F	P	F	Units	P	F	Const. Phase		
0102 1	Maintenance of Traffic	LS	1	180	1		1		DA	180		All Phases		
0102 5	Pedestrian Escort/Flagger	HR	20	180	3600		3600					All Phases		
0102 60	Work Zone Sign	ED	50	180	9000		9000					All Phases		
0102 74 1	Channelizing Device - Types I, II, DI, VP, Drum, or LCD	ED	20	180	3600		3600					All Phases		
0102 99	Portable Changeable Message Sign, Temporary	ED	3	194	582		582					All Phases		
0706 1 3	Raised Pavement Marker, Type B	EA			1847		1847					All Phases		
0710 11101	Painted Pavement Markings, Standard, White, Solid, 6"	GM			9.6040		9.604					All Phases		
0710 11102	Painted Pavement Markings, Standard, White, Solid For Interchange and Urban Island, 8"	GM			0.0400		0.040					All Phases		
0710 11123	Painted Pavement Markings, Standard, White, Solid For Crosswalk and Roundabout, 12"	LF			462.0		462					All Phases		
0710 11124	Painted Pavement Markings, Standard, White, Solid For Diagonal or Chevron, 18"	LF			254.0		254					All Phases		
0710 11125	Painted Pavement Markings, Standard, White, Solid For Stop Line or Crosswalk, 24"	LF			394.0		394					All Phases		
0710 11141	Painted Pavement Markings, Standard, White, 2-4 Dotted Guideline/6-10 Dotted Extension, 6"	GM			0.0690		0.069					All Phases		
0710 11160	Painted Pavement Markings, Standard, White, Message or Symbol	EA			2		2					All Phases		
0710 11170	Painted Pavement Markings, Standard, White, Arrows	EA			39		39					All Phases		
0710 11201	Painted Pavement Markings, Standard, Yellow, Solid, 6"	GM			8.4220		8.422					All Phases		
0710 11224	Painted Pavement Markings, Standard, Yellow, Solid for Diagonal or Chevron, 18"	LF			1346.0		1346					All Phases		
0710 11231	Painted Pavement Markings, Standard, Yellow, Skip, 6"	GM			1.7040		1.704					All Phases		
0710 11241	Painted Pavement Markings, Standard, Yellow, 2-4 Dotted Guideline/6-10 Dotted Extension, 6"	GM			0.3140		0.314					All Phases		
...														
...														
...														

Summary of Litter Removal and Mowing

Pay Item Number	Pay Item Description	Units of Measure	Duration (Days)	Frequency (Days)	Length (FT)	Width (FT)	Cycles	Quantity			Total Quantity		Location					Design Notes	Construction Remarks
								AC / Cycle	P	F	P	F	Const. Phase	Alignment	Begin Station	End Station	Side		
0107 1	Litter Removal And Disposal	AC	180	30			6	12.753	76.516		246.78		BL_US98	59+32.80	198+75.83	RT	42921		
			180	30			6	1.057	6.340				BL_US98	59+32.82	73+04.25	LT	42917		
			180	30			6	10.694	64.162				BL_US98	73+02.37	198+17.46	LT	42931		
			180	30			6	8.409	50.453				BL_US98	199+60.42	300+76.89	LT	42939		
			180	30			6	8.218	49.308				BL_US98	200+17.06	300+76.73	RT	42942		
0107 2	Mowing	AC	180	30			6	11.209	67.252		214.40		BL_US98	59+32.80	198+75.81	RT	35076		
			180	30			6	0.907	5.444				BL_US98	59+32.83	73+04.24	LT	34757		
			180	30			6	9.225	55.351				BL_US98	73+04.33	198+12.91	LT	34790		
			180	30			6	7.257	43.545				BL_US98	199+60.42	300+76.89	LT	35372		
			180	30			6	7.135	42.808				BL_US98	200+21.32	300+76.70	RT	35534		
...																			
...																			
...																			

Summary of Clearing Grubbing and Removal Items

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Secondary Quantity			Location					Design Notes	Construction Remarks
					P	F	P	F	Units	P	F	Alignment	Begin Station	End Station	Side	Element ID		
0110 1 1	Clearing & Grubbing	LS			1		1		AC	0.053		BL_US98	59+32.75	67+76.57	LT	39697	Total Acreage=2.69 AC	
										0.024		BL_US98	59+32.78	63+40.20	RT	39730		
										0.020		BL_US98	64+47.02	67+84.26	RT	39748		
										0.022		BL_US98	67+98.65	71+11.76	LT	39764		
										0.010		BL_US98	68+40.41	69+83.43	RT	39785		
										0.008		BL_US98	70+13.85	71+42.25	RT	39815		
										0.012		BL_US98	71+38.13	73+04.20	LT	39799		
										0.021		BL_US98	71+87.50	75+01.20	RT	39825		
										0.003		BL_US98	73+04.26	73+53.71	LT	39849		
										0.010		BL_US98	74+01.28	75+71.71	LT	39858		
										0.024		BL_US98	75+26.03	78+88.94	RT	39873		
										0.007		BL_US98	76+09.25	77+19.70	LT	39899		
										0.002		BL_US98	77+56.91	77+86.04	LT	39909		
										0.002		BL_US98	78+19.54	78+62.69	LT	39916		
										0.020		BL_US98	79+01.60	82+29.57	LT	39922		
										0.003		BL_US98	79+35.27	79+86.59	RT	39934		
										0.012		BL_US98	80+19.84	82+18.79	RT	39941		
										0.025		BL_US98	82+54.51	86+68.13	RT	39952		
										0.006		BL_US98	82+67.86	83+75.76	LT	39968		
										0.003		BL_US98	84+11.67	84+68.13	LT	39976		
										0.004		BL_US98	84+99.46	85+66.21	LT	39982		
										0.004		BL_US98	86+02.36	86+63.36	LT	39991		
										0.004		BL_US98	86+98.09	87+62.28	LT	39997		
										0.001		BL_US98	87+72.93	87+87.64	RT	40004		
										0.002		BL_US98	88+00.82	88+38.18	LT	41493		
										0.005		BL_US98	88+25.24	89+16.12	RT	40014		
										0.005		BL_US98	88+73.57	89+65.64	LT	40025		
										0.027		BL_US98	89+56.53	93+96.41	RT	40035		
										0.003		BL_US98	89+98.67	90+55.23	LT	41484		
										0.016		BL_US98	90+88.61	93+48.65	LT	40050		
										0.004		BL_US98	93+85.86	94+46.59	LT	40059		

Summary of Clearing Grubbing and Removal Items

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Secondary Quantity			Location					Design Notes	Construction Remarks	
					P	F	P	F	Units	P	F	Alignment	Begin Station	End Station	Side	Element ID			
											0.001		BL_US98	94+75.98	94+83.36	LT	40070		
											0.001		BL_US98	95+14.01	95+23.69	RT	40078		
											0.008		BL_US98	95+22.32	96+64.47	LT	40088		
											0.003		BL_US98	95+28.29	95+80.67	RT	40083		
											0.025		BL_US98	96+15.49	100+24.41	RT	40111		
											0.006		BL_US98	96+98.35	97+99.74	LT	40101		
											0.003		BL_US98	98+37.08	98+85.08	LT	40129		
											0.001		BL_US98	99+19.41	99+32.91	LT	40136		
											0.014		BL_US98	99+64.07	101+89.90	LT	40142		
											0.011		BL_US98	100+71.68	102+58.19	RT	40153		
											0.006		BL_US98	102+25.49	103+27.64	LT	40168		
											0.006		BL_US98	102+63.68	103+59.91	RT	40177		
											0.002		BL_US98	104+25.92	104+63.12	LT	40186		
											0.073		BL_US98	104+41.29	116+42.72	RT	40208		
											0.001		BL_US98	104+94.88	105+06.55	LT	40191		
											0.001		BL_US98	105+31.27	105+53.95	LT	40196		
											0.002		BL_US98	105+82.41	106+22.80	LT	40201		
											0.002		BL_US98	106+57.21	106+91.55	LT	40239		
											0.001		BL_US98	107+21.69	107+32.07	LT	40244		
											0.002		BL_US98	107+60.81	108+02.64	LT	40249		
											0.005		BL_US98	108+53.14	109+40.01	LT	40254		
											0.009		BL_US98	110+11.26	111+65.75	LT	40261		
											0.003		BL_US98	112+02.53	112+56.00	LT	40269		
											0.003		BL_US98	112+90.50	113+37.97	LT	40274		
											0.002		BL_US98	113+77.00	114+20.80	LT	40279		
											0.004		BL_US98	114+62.88	115+32.01	LT	40286		
											0.002		BL_US98	115+67.11	115+99.37	LT	40293		
											0.064		BL_US98	116+31.86	126+71.86	LT	40298		
											0.020		BL_US98	117+25.09	120+44.28	RT	40323		
											0.030		BL_US98	120+66.67	125+74.41	RT	40341		
											0.104		BL_US98	127+10.41	144+16.51	LT	40363		

Summary of Clearing Grubbing and Removal Items

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Secondary Quantity			Location					Design Notes	Construction Remarks	
					P	F	P	F	Units	P	F	Alignment	Begin Station	End Station	Side	Element ID			
											0.045		BL_US98	129+08.46	136+48.84	RT	40404		
											0.040		BL_US98	136+84.39	143+47.87	RT	40423		
											0.081		BL_US98	143+84.28	156+94.74	RT	40444		
											0.157		BL_US98	144+47.83	170+04.35	LT	40481		
											0.025		BL_US98	157+14.31	161+09.32	RT	40540		
											0.012		BL_US98	161+74.58	163+80.29	RT	40558		
											0.005		BL_US98	164+13.61	165+06.44	RT	40570		
											0.006		BL_US98	165+37.24	166+35.67	RT	40575		
											0.106		BL_US98	166+69.41	184+06.79	RT	40583		
											0.060		BL_US98	170+28.76	179+98.67	LT	40627		
											0.047		BL_US98	180+42.39	188+08.78	LT	40667		
											0.016		BL_US98	184+35.91	187+02.76	RT	40699		
											0.024		BL_US98	187+53.37	191+15.08	RT	40709		
											0.061		BL_US98	188+89.50	198+91.10	LT	40729		
											0.050		BL_US98	191+42.72	199+29.37	RT	40758		
											0.029		BL_US98	199+08.78	203+89.84	LT	40794		
											0.018		BL_US98	199+45.15	202+35.12	RT	40813		
											0.014		BL_US98	202+83.68	205+10.98	RT	40828		
											0.036		BL_US98	204+29.02	210+16.89	LT	40839		
											0.011		BL_US98	205+65.82	207+45.06	RT	40860		
											0.015		BL_US98	207+87.49	210+16.94	RT	40869		
											0.010		BL_US98	210+62.22	212+14.43	LT	40889		
											0.038		BL_US98	210+63.28	216+68.03	RT	40902		
											0.006		BL_US98	212+46.71	213+50.66	LT	40922		
											0.028		BL_US98	213+82.19	218+44.24	LT	40929		
											0.007		BL_US98	217+09.99	218+22.44	RT	40945		
											0.082		BL_US98	218+61.14	232+05.46	RT	40962		
											0.005		BL_US98	218+70.90	219+59.35	LT	40955		
											0.034		BL_US98	219+95.96	225+40.92	LT	40999		
											0.015		BL_US98	226+30.85	228+39.34	LT	41020		
											0.046		BL_US98	228+71.30	236+21.30	LT	41043		

Summary of Clearing Grubbing and Removal Items

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Secondary Quantity			Location					Design Notes	Construction Remarks		
					P	F	P	F	Units	P	F	Alignment	Begin Station	End Station	Side	Element ID				
											0.023			BL_US98	232+49.45	236+26.96	RT	41076		
											0.049			BL_US98	236+52.80	244+27.88	RT	41120		
											0.035			BL_US98	236+66.33	242+27.40	LT	41092		
											0.009			BL_US98	242+62.71	244+12.88	LT	41149		
											0.111			BL_US98	244+49.04	262+52.19	LT	41163		
											0.006			BL_US98	244+62.98	245+63.21	RT	41156		
											0.011			BL_US98	245+99.55	247+85.47	RT	41215		
											0.010			BL_US98	248+44.74	250+06.44	RT	41222		
											0.072			BL_US98	250+72.42	262+56.49	RT	41230		
											0.005			BL_US98	262+88.29	263+77.74	RT	41261		
											0.191			BL_US98	263+05.68	294+08.83	LT	41270		
											0.073			BL_US98	264+13.67	275+98.07	RT	41356		
											0.057			BL_US98	276+28.59	285+47.10	RT	41391		
											0.090			BL_US98	286+00.85	300+76.75	RT	41425		
											0.038			BL_US98	294+67.74	300+76.84	LT	41461		
...																				
...																				
...																				

Summary of Pavement

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks	
			P	F	P	F	Alignment	Begin Station	End Station	Location Description	Side			Element ID
0327 70 2	Milling Exist Asph Pavt, 3 1/2 Avg Depth	SY	40703.3		75702		BL_US98	59+32.75	199+22.89		LT/RT	9296		
			34998.5				BL_US98	199+13.68	300+76.81		LT/RT	10673		
0327 70 6	Milling Exist Asph Pavt, 1 1/2 Avg Depth	SY	2906.3		30393		BL_US98	59+32.75	102+59.45		RT	38784		
			1215.7				BL_US98	59+32.75	73+03.96		LT	11829		
			7450.7				BL_US98	73+02.35	199+02.10		LT	38425		
			48.8				BL_US98	102+63.97	103+56.12		RT	12226		
			5893.9				BL_US98	104+40.87	199+28.22		RT	12235		
			7029.0				BL_US98	199+07.93	300+76.81		LT	16380		
			5849.0				BL_US98	199+34.31	300+76.81		RT	12485		
0334 1 53	Superpave Asphaltic Concrete, Traffic C, PG 76-22	TN	4477.36		8327.2		BL_US98	59+32.75	199+22.89		LT/RT	15203		
			3849.84				BL_US98	199+13.68	300+76.81		LT/RT	15521		
0337 7 83	Asphalt Concrete Friction Course, Traffic C, FC-12.5, PG 76-22	TN	3358.02		8752.9		BL_US98	59+32.75	199+22.89		LT/RT	13287		
			239.77				BL_US98	59+32.75	102+59.45		RT	39472		
			100.30				BL_US98	59+32.75	73+03.96		LT	13748		
			614.68				BL_US98	73+02.35	199+02.10		LT	39113		
			4.03				BL_US98	102+63.97	103+56.12		RT	14145		
			486.25				BL_US98	104+40.87	199+28.22		RT	14154		
			579.89				BL_US98	199+07.93	300+76.81		LT	16669		
			2887.38				BL_US98	199+13.68	300+76.81		LT/RT	14664		
			482.54				BL_US98	199+34.31	300+76.81		RT	14404		
...														
...														
...														

Summary of Sidewalk and Detectable Warnings

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
0527 2	Detectable Warnings	SF	16.3		16		BL_US98	226+22.75	226+30.94	LT	34208		
...													
...													
...													

Summary of Performance Turf

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
					P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
0570 1 3	Performance Turf, Sod and Soil	SY			255.9		13003		BL_US98	59+32.75	67+76.57	LT	29670		
					118.1				BL_US98	59+32.78	63+40.20	RT	29703		
					97.3				BL_US98	64+47.02	67+84.26	RT	29721		
					106.8				BL_US98	67+98.65	71+11.76	LT	29737		
					49.3				BL_US98	68+40.41	69+83.43	RT	29758		
					37.1				BL_US98	70+13.85	71+42.25	RT	29788		
					56.9				BL_US98	71+38.13	73+04.20	LT	29772		
					101.2				BL_US98	71+87.50	75+01.20	RT	29798		
					15.1				BL_US98	73+04.26	73+53.71	LT	29822		
					49.7				BL_US98	74+01.28	75+71.71	LT	29831		
					115.2				BL_US98	75+26.03	78+88.94	RT	29846		
					31.9				BL_US98	76+09.25	77+19.70	LT	29872		
					7.8				BL_US98	77+56.91	77+86.04	LT	29882		
					12.1				BL_US98	78+19.54	78+62.69	LT	29889		
					96.4				BL_US98	79+01.60	82+29.57	LT	29895		
					14.2				BL_US98	79+35.27	79+86.59	RT	29907		
					57.7				BL_US98	80+19.84	82+18.79	RT	29914		
					121.8				BL_US98	82+54.51	86+68.13	RT	29925		
					30.8				BL_US98	82+67.86	83+75.76	LT	29941		
					15.9				BL_US98	84+11.67	84+68.13	LT	29949		
					18.9				BL_US98	84+99.46	85+66.21	LT	29955		
					17.2				BL_US98	86+02.36	86+63.36	LT	29964		
					17.9				BL_US98	86+98.09	87+62.28	LT	29970		
					3.5				BL_US98	87+72.93	87+87.64	RT	29977		
					9.7				BL_US98	88+00.82	88+38.18	LT	31466		
					26.5				BL_US98	88+25.24	89+16.12	RT	29987		
					25.6				BL_US98	88+73.57	89+65.64	LT	29998		
					131.2				BL_US98	89+56.53	93+96.41	RT	30008		
					15.5				BL_US98	89+98.67	90+55.23	LT	31457		
					75.3				BL_US98	90+88.61	93+48.65	LT	30023		
					17.2				BL_US98	93+85.86	94+46.59	LT	30032		

Summary of Performance Turf

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
					P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
					1.5				BL_US98	94+75.98	94+83.36	LT	30043		
					2.3				BL_US98	95+14.01	95+23.69	RT	30051		
					40.8				BL_US98	95+22.32	96+64.47	LT	30061		
					15.2				BL_US98	95+28.29	95+80.67	RT	30056		
					120.9				BL_US98	96+15.49	100+24.41	RT	30084		
					29.1				BL_US98	96+98.35	97+99.74	LT	30074		
					13.3				BL_US98	98+37.08	98+85.08	LT	30102		
					3.3				BL_US98	99+19.41	99+32.91	LT	30109		
					66.0				BL_US98	99+64.07	101+89.90	LT	30115		
					55.4				BL_US98	100+71.68	102+58.19	RT	30126		
					29.8				BL_US98	102+25.49	103+27.64	LT	30141		
					28.0				BL_US98	102+63.68	103+59.91	RT	30150		
					10.2				BL_US98	104+25.92	104+63.12	LT	30159		
					355.6				BL_US98	104+41.29	116+42.72	RT	30181		
					2.6				BL_US98	104+94.88	105+06.55	LT	30164		
					6.0				BL_US98	105+31.27	105+53.95	LT	30169		
					10.8				BL_US98	105+82.41	106+22.80	LT	30174		
					9.1				BL_US98	106+57.21	106+91.55	LT	30212		
					2.2				BL_US98	107+21.69	107+32.07	LT	30217		
					11.2				BL_US98	107+60.81	108+02.64	LT	30222		
					24.6				BL_US98	108+53.14	109+40.01	LT	30227		
					44.7				BL_US98	110+11.26	111+65.75	LT	30234		
					14.9				BL_US98	112+02.53	112+56.00	LT	30242		
					13.0				BL_US98	112+90.50	113+37.97	LT	30247		
					11.6				BL_US98	113+77.00	114+20.80	LT	30252		
					19.1				BL_US98	114+62.88	115+32.01	LT	30259		
					8.4				BL_US98	115+67.11	115+99.37	LT	30266		
					307.5				BL_US98	116+31.86	126+71.86	LT	30271		
					96.4				BL_US98	117+25.09	120+44.28	RT	30296		
					146.6				BL_US98	120+66.67	125+74.41	RT	30314		
					504.9				BL_US98	127+10.41	144+16.51	LT	30336		

Summary of Performance Turf

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
					P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
					215.5				BL_US98	129+08.46	136+48.84	RT	30377		
					195.7				BL_US98	136+84.39	143+47.87	RT	30396		
					391.6				BL_US98	143+84.28	156+94.74	RT	30417		
					759.8				BL_US98	144+47.83	170+04.35	LT	30454		
					119.2				BL_US98	157+14.31	161+09.32	RT	30513		
					59.3				BL_US98	161+74.58	163+80.29	RT	30531		
					26.1				BL_US98	164+13.61	165+06.44	RT	30543		
					28.2				BL_US98	165+37.24	166+35.67	RT	30548		
					513.9				BL_US98	166+69.41	184+06.79	RT	30556		
					292.0				BL_US98	170+28.76	179+98.67	LT	30600		
					229.2				BL_US98	180+42.39	188+08.78	LT	30640		
					78.2				BL_US98	184+35.91	187+02.76	RT	30672		
					114.7				BL_US98	187+53.37	191+15.08	RT	30682		
					297.4				BL_US98	188+89.50	198+91.10	LT	30702		
					241.0				BL_US98	191+42.72	199+29.37	RT	30731		
					142.1				BL_US98	199+08.78	203+89.84	LT	30767		
					86.2				BL_US98	199+45.15	202+35.12	RT	30786		
					66.4				BL_US98	202+83.68	205+10.98	RT	30801		
					175.6				BL_US98	204+29.02	210+16.89	LT	30812		
					52.4				BL_US98	205+65.82	207+45.06	RT	30833		
					71.5				BL_US98	207+87.49	210+16.94	RT	30842		
					47.2				BL_US98	210+62.22	212+14.43	LT	30862		
					182.9				BL_US98	210+63.28	216+68.03	RT	30875		
					29.5				BL_US98	212+46.71	213+50.66	LT	30895		
					136.9				BL_US98	213+82.19	218+44.24	LT	30902		
					31.7				BL_US98	217+09.99	218+22.44	RT	30918		
					397.0				BL_US98	218+61.14	232+05.46	RT	30935		
					25.8				BL_US98	218+70.90	219+59.35	LT	30928		
					166.4				BL_US98	219+95.96	225+40.92	LT	30972		
					72.5				BL_US98	226+30.85	228+39.34	LT	30993		
					224.8				BL_US98	228+71.30	236+21.30	LT	31016		

Summary of Performance Turf

Pay Item Number	Pay Item Description	Units of Measure	Length (FT)	Width (FT)	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
					P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
					112.4				BL_US98	232+49.45	236+26.96	RT	31049		
					234.8				BL_US98	236+52.80	244+27.88	RT	31093		
					169.1				BL_US98	236+66.33	242+27.40	LT	31065		
					43.3				BL_US98	242+62.71	244+12.88	LT	31122		
					537.1				BL_US98	244+49.04	262+52.19	LT	31136		
					28.6				BL_US98	244+62.98	245+63.21	RT	31129		
					53.7				BL_US98	245+99.55	247+85.47	RT	31188		
					46.9				BL_US98	248+44.74	250+06.44	RT	31195		
					350.2				BL_US98	250+72.42	262+56.49	RT	31203		
					25.5				BL_US98	262+88.29	263+77.74	RT	31234		
					925.5				BL_US98	263+05.68	294+08.83	LT	31243		
					354.1				BL_US98	264+13.67	275+98.07	RT	31329		
					275.8				BL_US98	276+28.59	285+47.10	RT	31364		
					437.2				BL_US98	286+00.85	300+76.75	RT	31398		
					183.5				BL_US98	294+67.74	300+76.84	LT	31434		
...															
...															
...															

Summary of Intelligent Transportation Systems Items

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
0633 6	Fiber Optic Cable Locator	DA	180		180		BL_US98	59+32.75	300+76.81	LT/RT		Total Contract Duration=180 Days	
...													
...													
...													

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
0546 72 3	Ground-In Rumble Strips, 8" Sinusoidal	GM	0.0601		13.323		BL_US98	64+59.17	67+76.68	RT	29123		
			0.0537				BL_US98	64+61.94	67+45.41	LT	29120		
			0.0248				BL_US98	64+62.68	65+93.58	RT	31544		
			0.0241				BL_US98	64+64.71	65+91.66	LT	31542		
			0.0236				BL_US98	65+91.66	67+16.30	LT	31543		
			0.0054				BL_US98	67+16.30	67+44.84	LT	31726		
			0.0465				BL_US98	68+37.23	70+82.75	LT	2824		
			0.0492				BL_US98	68+38.12	70+98.16	LT	31522		
			0.0507				BL_US98	68+65.73	71+33.17	RT	2791		
			0.0495				BL_US98	71+93.89	74+55.26	RT	2806		
			0.0256				BL_US98	72+12.12	73+47.24	LT	2792		
			0.0412				BL_US98	72+23.73	74+41.23	LT	31546		
			0.0486				BL_US98	72+24.44	74+80.82	RT	26141		
			0.2533				BL_US98	74+16.31	87+53.45	LT	2793		
			0.0166				BL_US98	75+10.57	75+98.21	LT/RT	26142		
			0.2453				BL_US98	75+52.45	88+46.91	RT	2794		
			0.1140				BL_US98	75+98.72	82+00.67	LT/RT	29553		
			0.1475				BL_US98	82+00.67	89+79.48	RT	26148		
			1.5566				BL_US98	87+53.49	169+79.29	LT	2796		
			0.1378				BL_US98	88+46.96	95+69.33	RT	2795		
			0.1108				BL_US98	89+86.28	95+71.62	LT	26150		
			0.0903				BL_US98	96+25.42	101+01.07	RT	2797		
			0.0626				BL_US98	96+25.49	99+56.00	RT	29555		
			0.0766				BL_US98	99+55.37	103+59.57	LT/RT	26152		
			0.0130				BL_US98	99+62.84	100+31.64	LT	31548		
			0.0134				BL_US98	100+31.55	101+02.27	LT	31549		
			0.0417				BL_US98	101+02.27	103+22.46	LT	31550		
			0.0213				BL_US98	102+43.23	103+55.95	RT	2798		
			0.0666				BL_US98	104+30.07	107+81.48	RT	26153		
			0.2576				BL_US98	104+41.05	118+00.95	RT	2799		
			0.0831				BL_US98	107+81.83	112+20.31	RT	26154		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0725				BL_US98	108+37.30	112+20.00	LT	31749		
			0.0886				BL_US98	112+97.72	117+65.52	LT	26155		
			0.0639				BL_US98	121+85.83	125+23.23	RT	2800		
			0.0515				BL_US98	121+86.05	124+58.00	LT/RT	29538		
			0.0128				BL_US98	124+58.94	125+26.74	LT	26158		
			0.0780				BL_US98	125+23.23	129+34.92	RT	31515		
			0.5194				BL_US98	129+34.12	156+76.37	LT	29541		
			0.5189				BL_US98	129+34.71	156+74.97	RT	2804		
			0.3142				BL_US98	157+45.10	174+03.96	RT	12676		
			0.2038				BL_US98	157+46.65	168+22.72	LT	29539		
			0.0295				BL_US98	168+22.80	169+78.51	LT	29535		
			0.0725				BL_US98	170+49.70	174+32.42	LT	29540		
			0.1606				BL_US98	170+53.01	179+00.86	LT	2803		
			0.1318				BL_US98	174+03.96	180+99.70	RT	26109		
			0.0485				BL_US98	174+31.37	176+87.27	RT	31750		
			0.1039				BL_US98	174+32.26	179+80.89	LT	26164		
			0.0547				BL_US98	180+36.46	183+25.34	LT	26166		
			0.0871				BL_US98	180+43.52	185+03.33	LT	25923		
			0.0512				BL_US98	180+57.31	183+27.31	RT	31627		
			0.1823				BL_US98	180+99.45	190+61.69	RT	26111		
			0.1469				BL_US98	183+27.07	191+02.75	LT/RT	29558		
			0.2632				BL_US98	185+03.57	198+93.04	LT	2808		
			0.1397				BL_US98	191+72.44	199+10.04	LT	26167		
			0.1329				BL_US98	192+01.78	199+03.28	RT	2802		
			0.0897				BL_US98	199+23.39	203+97.17	LT	26168		
			0.1993				BL_US98	199+32.97	209+85.17	LT	2810		
			0.1244				BL_US98	199+43.48	206+00.23	RT	2811		
			0.0577				BL_US98	203+98.61	207+03.05	LT	29559		
			0.0476				BL_US98	204+00.77	206+52.03	RT	31752		
			0.0734				BL_US98	206+00.23	209+87.70	RT	2812		
			0.0530				BL_US98	207+05.63	209+85.39	LT	29560		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.2669				BL_US98	210+84.98	224+89.99	LT	2816		
			0.1199				BL_US98	210+96.08	217+30.61	RT	2813		
			0.0551				BL_US98	210+96.84	213+87.85	RT	26170		
			0.0940				BL_US98	213+89.92	218+87.11	RT	29561		
			0.0620				BL_US98	214+38.58	217+65.68	LT	31629		
			0.0622				BL_US98	217+30.61	220+62.47	RT	2814		
			0.0070				BL_US98	217+64.42	218+01.41	LT	31631		
			0.0052				BL_US98	218+01.41	218+28.52	LT	31637		
			0.0048				BL_US98	218+28.52	218+53.57	LT	31638		
			0.0073				BL_US98	218+53.57	218+91.76	LT	31634		
			0.0085				BL_US98	218+87.11	219+31.53	LT/RT	32125		
			0.0086				BL_US98	218+91.76	219+36.92	LT	31630		
			0.1069				BL_US98	219+37.22	225+01.37	LT	29517		
			0.2905				BL_US98	220+62.87	235+96.65	RT	2815		
			0.1415				BL_US98	225+91.41	233+38.33	LT	26172		
			0.1270				BL_US98	226+12.00	232+82.63	RT	29544		
			0.0485				BL_US98	233+39.42	235+95.71	LT	29562		
			0.0303				BL_US98	234+36.10	235+95.92	LT	26189		
			0.7377				BL_US98	236+70.20	275+65.36	RT	2819		
			0.0322				BL_US98	236+75.54	238+45.66	RT	29563		
			0.4814				BL_US98	236+86.57	262+28.48	LT	2820		
			0.0724				BL_US98	238+47.26	242+29.34	RT	29564		
			0.0624				BL_US98	238+99.50	242+29.12	LT	31756		
			0.2594				BL_US98	242+29.34	255+99.04	LT/RT	29565		
			0.1213				BL_US98	255+98.52	262+38.74	LT	26178		
			0.0707				BL_US98	256+03.43	259+76.67	RT	31758		
			0.5769				BL_US98	263+32.00	293+78.06	LT	2821		
			0.0692				BL_US98	263+33.30	266+98.53	LT	26179		
			0.0695				BL_US98	263+33.39	267+00.07	RT	31759		
			0.1141				BL_US98	266+99.25	273+01.80	LT	29566		
			0.0503				BL_US98	273+01.80	275+67.35	LT	26181		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.3644				BL_US98	276+57.35	295+81.23	RT	2822		
			0.0978				BL_US98	276+60.01	281+76.47	LT	29534		
			0.0993				BL_US98	281+76.95	287+01.42	LT	29567		
			0.0651				BL_US98	287+01.44	290+45.06	LT	26184		
			0.0544				BL_US98	287+01.49	289+88.52	LT/RT	31760		
			0.0666				BL_US98	290+45.86	293+97.55	LT	30129		
			0.0173				BL_US98	294+89.68	295+80.99	LT	26185		
			0.0175				BL_US98	294+89.82	295+82.04	LT	2823		
			0.0715				BL_US98	294+89.96	298+67.63	RT	31762		
			0.0381				BL_US98	295+81.02	297+81.99	LT	29630		
			0.0376				BL_US98	295+81.10	297+79.62	RT	29569		
			0.0335				BL_US98	295+82.06	297+58.86	LT	29579		
			0.0602				BL_US98	297+58.86	300+76.80	LT	29580		
			0.0311				BL_US98	297+79.62	299+43.93	RT	29581		
			0.0369				BL_US98	297+81.99	299+76.69	LT	29632		
			0.0396				BL_US98	298+67.63	300+76.80	RT	31764		
			0.0252				BL_US98	299+43.93	300+76.77	RT	29582		
			0.0190				BL_US98	299+76.69	300+76.81	LT	29631		
0706 1 3	Raised Pavement Marker, Type B	EA	1847		1847		BL_US98	59+32.50	300+45.92	RT	29759		
0710 90	Painted Pavement Markings, Final Surface	LS	1		1		BL_US98	59+32.75	300+76.81	LT/RT			
0711 11102	Thermoplastic, Standard, White, Solid, 8 For Interchange And Urban Island	GM	0.0147		0.040		BL_US98	225+93.42	226+70.87	LT	4760		
			0.0076				BL_US98	225+93.50	226+04.44	LT	25115		
			0.0015				BL_US98	226+04.39	226+04.51	LT	25116		
			0.0158				BL_US98	226+04.51	226+70.89	LT	4762		
0711 11124	Thermoplastic, Standard, White, Solid, 18 For Diagonals And Chevrons	LF	27.0		254		BL_US98	226+02.58	226+12.09	LT	4781		
			23.2				BL_US98	226+03.61	226+18.81	LT	4786		
			12.9				BL_US98	226+04.38	226+13.29	LT	4784		
			6.1				BL_US98	226+04.59	226+08.73	LT	4782		
			26.5				BL_US98	226+13.79	226+22.11	LT	4780		
			7.0				BL_US98	226+17.60	226+24.05	LT	31666		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			10.9				BL_US98	226+20.73	226+31.05	LT	31661		
			24.1				BL_US98	226+25.29	226+32.21	LT	4774		
			12.0				BL_US98	226+25.40	226+37.20	LT	31663		
			14.0				BL_US98	226+30.31	226+44.22	LT	31665		
			17.0				BL_US98	226+36.18	226+53.11	LT	31659		
			14.3				BL_US98	226+38.51	226+42.51	LT	4769		
			17.9				BL_US98	226+45.17	226+63.08	LT	31660		
			11.3				BL_US98	226+47.38	226+52.57	LT	29415		
			16.7				BL_US98	226+57.18	226+73.92	LT	31664		
			13.5				BL_US98	226+71.33	226+84.83	LT	31658		
0711 11125	Thermoplastic, Standard, White, Solid, 24 For Stop Line And Crosswalk	LF	22.6		394		BL_US98	68+21.57	68+43.10	RT	4544		
			27.0				BL_US98	71+10.89	71+36.68	LT	4570		
			18.9				BL_US98	71+63.11	71+81.98	RT	31723		
			20.9				BL_US98	75+05.93	75+26.80	RT	4571		
			35.1				BL_US98	103+82.88	104+17.94	RT	31552		
			14.7				BL_US98	120+56.37	120+71.07	RT	4585		
			14.9				BL_US98	157+06.07	157+20.78	RT	4598		
			21.3				BL_US98	191+37.72	191+58.86	RT	4617		
			11.2				BL_US98	194+07.38	194+07.55	RT	4627		
			11.0				BL_US98	194+57.91	194+58.19	RT	4628		
			11.7				BL_US98	198+88.29	198+88.54	RT	4629		
			11.7				BL_US98	199+47.29	199+47.55	LT	24998		
			11.8				BL_US98	204+32.39	204+32.68	LT	24996		
			11.2				BL_US98	204+82.72	204+82.89	LT	24941		
			14.8				BL_US98	210+23.94	210+38.70	LT	32460		
			24.1				BL_US98	210+41.22	210+65.27	RT	4789		
			44.1				BL_US98	225+27.26	225+71.35	LT	4756		
			15.6				BL_US98	236+38.34	236+53.90	RT	4794		
			15.7				BL_US98	262+54.03	262+69.73	LT	4810		
			14.9				BL_US98	276+13.60	276+28.54	RT	4833		
			20.4				BL_US98	294+10.51	294+30.90	LT	4851		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
0711 11141	Thermoplastic, Standard, White, 2-4 Dotted Guideline/ 6-10 Gap Extension, 6"	GM	0.0431		0.069		BL_US98	65+99.69	68+27.38	RT	32166		
			0.0262				BL_US98	218+75.07	220+13.93	RT	31776		
0711 11160	Thermoplastic, Standard, White, Message Or Symbol	EA	1		2		BL_US98	194+22.93	194+22.93	RT	4637		
			1				BL_US98	204+67.95	204+67.95	LT	24942		
0711 11170	Thermoplastic, Standard, White, Arrow	EA	1		39		BL_US98	67+13.62	67+13.62	LT	32494		
			1				BL_US98	68+55.26	68+55.26	RT	3900		
			1				BL_US98	69+60.98	69+60.98	RT	3913		
			1				BL_US98	70+63.92	70+63.92	LT	3926		
			1				BL_US98	104+63.62	104+63.62	LT	4290		
			1				BL_US98	105+69.43	105+69.43	LT	4303		
			1				BL_US98	106+76.38	106+76.38	LT	4329		
			1				BL_US98	178+46.83	178+46.83	RT	3939		
			1				BL_US98	179+01.96	179+01.96	RT	3952		
			1				BL_US98	179+51.94	179+51.94	RT	3965		
			1				BL_US98	208+13.88	208+13.88	RT	3978		
			1				BL_US98	208+74.96	208+74.96	LT	3991		
			1				BL_US98	209+50.77	209+50.77	LT	4004		
			1				BL_US98	211+27.12	211+27.12	LT	4264		
			1				BL_US98	212+09.44	212+09.44	LT	4277		
			1				BL_US98	212+78.71	212+78.71	LT	4251		
			1				BL_US98	220+35.65	220+35.65	RT	4017		
			1				BL_US98	221+41.07	221+41.07	RT	4056		
			1				BL_US98	222+50.01	222+50.01	RT	4069		
			1				BL_US98	223+60.02	223+60.02	RT	4082		
			1				BL_US98	224+66.84	224+66.84	RT	4030		
			1				BL_US98	225+49.59	225+49.59	LT	4526		
			1				BL_US98	225+61.04	225+61.04	LT	4513		
			1				BL_US98	227+35.62	227+35.62	LT	4381		
			1				BL_US98	228+46.51	228+46.51	LT	4408		
			1				BL_US98	229+54.45	229+54.45	LT	4421		
			1				BL_US98	230+63.25	230+63.25	LT	4447		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			1				BL_US98	231+70.39	231+70.39	LT	4460		
			1				BL_US98	232+74.84	232+74.84	LT	4473		
			1				BL_US98	234+42.65	234+42.65	RT	4095		
			1				BL_US98	235+02.17	235+02.17	LT	4108		
			1				BL_US98	235+65.36	235+65.36	RT	4121		
			1				BL_US98	237+08.89	237+08.89	RT	4225		
			1				BL_US98	261+36.32	261+36.32	RT	4160		
			1				BL_US98	262+04.41	262+04.41	LT	4134		
			1				BL_US98	291+49.37	291+49.37	RT	4186		
			1				BL_US98	292+26.65	292+26.65	RT	4199		
			1				BL_US98	292+95.65	292+95.65	RT	32466		
			1				BL_US98	293+63.04	293+63.04	LT	4173		
0711 11224	Thermoplastic, Standard, Yellow, Solid, 18 For Diagonal Or Chevrons	LF	3.3		1346		BL_US98	63+38.41	63+40.51	LT/RT	2371		
			3.5				BL_US98	63+78.51	63+80.81	LT/RT	2370		
			5.5				BL_US98	64+18.77	64+22.46	LT/RT	2345		
			6.9				BL_US98	64+58.74	64+63.53	LT/RT	2373		
			8.6				BL_US98	64+99.18	65+05.17	LT/RT	2374		
			10.7				BL_US98	65+39.68	65+47.15	LT/RT	2375		
			12.8				BL_US98	65+79.89	65+88.81	LT/RT	2378		
			5.8				BL_US98	66+19.83	66+23.88	LT	2379		
			15.1				BL_US98	72+25.83	72+36.36	LT/RT	2383		
			14.6				BL_US98	72+65.62	72+75.79	LT/RT	2382		
			13.5				BL_US98	73+05.99	73+15.46	LT/RT	2387		
			11.2				BL_US98	73+46.02	73+53.86	LT/RT	2391		
			9.8				BL_US98	73+86.00	73+92.87	LT/RT	2390		
			8.2				BL_US98	74+26.22	74+31.92	LT/RT	2397		
			3.3				BL_US98	75+21.32	75+23.65	LT/RT	2430		
			1.9				BL_US98	75+60.76	75+62.10	LT/RT	2429		
			4.5				BL_US98	101+00.12	101+03.31	LT/RT	2401		
			4.4				BL_US98	101+00.12	101+03.24	LT/RT	2402		
			6.4				BL_US98	101+40.05	101+44.59	LT/RT	2404		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			8.4				BL_US98	101+79.63	101+85.56	LT/RT	2409		
			9.6				BL_US98	102+19.88	102+26.70	LT/RT	2413		
			11.3				BL_US98	102+60.48	102+68.52	LT/RT	2419		
			12.6				BL_US98	103+00.89	103+09.83	LT/RT	2418		
			9.4				BL_US98	103+40.23	103+46.90	LT/RT	2424		
			11.0				BL_US98	108+31.32	108+39.09	LT/RT	2431		
			11.9				BL_US98	108+70.28	108+78.70	LT/RT	2432		
			10.8				BL_US98	109+10.54	109+18.19	LT/RT	2434		
			9.2				BL_US98	109+50.15	109+56.68	LT/RT	2437		
			7.8				BL_US98	109+90.48	109+95.98	LT/RT	2436		
			6.1				BL_US98	110+30.13	110+34.49	LT/RT	2441		
			4.3				BL_US98	110+70.35	110+73.41	LT/RT	2440		
			2.5				BL_US98	111+10.42	111+12.21	LT/RT	2442		
			4.9				BL_US98	175+61.51	175+65.11	RT	2444		
			7.0				BL_US98	176+00.86	176+05.94	RT	2443		
			8.9				BL_US98	176+40.99	176+47.46	RT	2445		
			10.0				BL_US98	176+82.48	176+89.76	RT	2447		
			10.4				BL_US98	180+81.71	180+88.81	RT	2452		
			8.6				BL_US98	181+21.83	181+27.70	RT	2474		
			6.9				BL_US98	181+62.15	181+66.81	RT	2476		
			5.2				BL_US98	182+02.39	182+05.90	RT	2477		
			3.6				BL_US98	182+42.03	182+44.70	RT	2473		
			5.6				BL_US98	205+22.90	205+26.71	LT/RT	2515		
			7.4				BL_US98	205+63.56	205+68.61	LT/RT	2518		
			9.1				BL_US98	206+03.62	206+09.84	LT/RT	2519		
			10.5				BL_US98	206+44.57	206+51.73	LT/RT	2524		
			9.1				BL_US98	214+21.04	214+27.22	LT/RT	2538		
			14.7				BL_US98	214+57.41	214+67.41	LT/RT	2541		
			13.7				BL_US98	214+97.62	215+06.93	LT/RT	2545		
			13.4				BL_US98	215+39.73	215+48.86	LT/RT	2559		
			13.0				BL_US98	215+79.24	215+88.08	LT/RT	2561		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			12.5				BL_US98	216+19.82	216+28.42	LT/RT	2564		
			12.4				BL_US98	216+59.74	216+68.48	LT/RT	2567		
			12.0				BL_US98	217+00.16	217+08.79	LT/RT	2580		
			11.9				BL_US98	217+41.18	217+49.93	LT/RT	2617		
			13.2				BL_US98	217+82.54	217+92.51	LT/RT	2618		
			15.8				BL_US98	218+25.46	218+37.65	LT/RT	2623		
			10.9				BL_US98	218+25.99	218+34.42	LT/RT	2621		
			13.3				BL_US98	218+70.89	218+81.38	LT/RT	2624		
			13.7				BL_US98	226+34.80	226+44.46	LT/RT	2680		
			13.3				BL_US98	226+74.85	226+84.23	LT/RT	2681		
			13.3				BL_US98	227+14.93	227+24.25	LT/RT	2682		
			13.7				BL_US98	227+54.74	227+64.40	LT/RT	2683		
			14.1				BL_US98	227+94.65	228+04.60	LT/RT	2684		
			14.5				BL_US98	228+34.57	228+44.78	LT/RT	2685		
			15.0				BL_US98	228+74.32	228+84.93	LT/RT	2686		
			15.0				BL_US98	229+14.40	229+24.83	LT/RT	2687		
			15.1				BL_US98	229+54.26	229+64.88	LT/RT	2688		
			15.3				BL_US98	229+94.02	230+04.83	LT/RT	2689		
			15.4				BL_US98	230+34.01	230+44.86	LT/RT	25918		
			15.4				BL_US98	230+73.99	230+84.87	LT/RT	2690		
			15.4				BL_US98	231+13.89	231+24.75	LT/RT	2691		
			15.4				BL_US98	231+53.93	231+64.70	LT/RT	2692		
			15.6				BL_US98	231+93.69	232+04.84	LT/RT	2693		
			15.4				BL_US98	232+33.79	232+44.67	LT/RT	2694		
			14.8				BL_US98	232+73.91	232+84.38	LT/RT	2695		
			10.8				BL_US98	238+89.62	238+96.87	LT/RT	2696		
			13.2				BL_US98	239+27.47	239+36.89	LT/RT	2697		
			12.6				BL_US98	239+67.68	239+76.42	LT/RT	2699		
			11.7				BL_US98	240+07.77	240+16.22	LT/RT	2698		
			9.9				BL_US98	240+48.37	240+55.32	LT/RT	2700		
			8.4				BL_US98	240+88.93	240+94.75	LT/RT	2701		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			6.3				BL_US98	241+29.84	241+34.16	LT/RT	2702		
			3.8				BL_US98	241+70.75	241+73.48	LT/RT	2703		
			2.8				BL_US98	256+43.76	256+45.79	LT/RT	2721		
			5.7				BL_US98	256+82.88	256+86.86	LT/RT	2722		
			8.0				BL_US98	257+22.09	257+27.75	LT/RT	2723		
			9.7				BL_US98	257+61.54	257+68.22	LT/RT	2724		
			11.8				BL_US98	258+00.62	258+08.97	LT/RT	2725		
			13.1				BL_US98	258+40.09	258+49.37	LT/RT	2726		
			14.4				BL_US98	258+79.63	258+89.79	LT/RT	2727		
			15.0				BL_US98	259+19.32	259+29.82	LT/RT	2728		
			16.0				BL_US98	259+59.06	259+70.29	LT/RT	2729		
			7.4				BL_US98	259+98.69	260+03.90	LT	2730		
			13.1				BL_US98	262+70.93	262+79.99	LT	4832		
			11.0				BL_US98	262+74.62	262+82.19	LT	4831		
			14.9				BL_US98	263+34.49	263+44.98	LT/RT	2765		
			14.5				BL_US98	263+74.63	263+84.94	LT/RT	2766		
			13.5				BL_US98	264+15.03	264+24.52	LT/RT	2767		
			12.4				BL_US98	264+55.46	264+64.30	LT/RT	2768		
			10.8				BL_US98	264+96.08	265+03.71	LT/RT	2769		
			9.0				BL_US98	265+36.75	265+43.17	LT/RT	2770		
			7.2				BL_US98	265+77.38	265+82.47	LT/RT	2771		
			5.0				BL_US98	266+18.01	266+21.63	LT/RT	2772		
			2.2				BL_US98	266+59.11	266+60.63	LT/RT	2773		
			2.9				BL_US98	287+91.56	287+93.46	LT/RT	26077		
			4.8				BL_US98	288+30.76	288+33.90	LT/RT	2774		
			7.4				BL_US98	288+69.81	288+75.06	LT/RT	2775		
			9.1				BL_US98	289+09.32	289+15.71	LT/RT	2776		
			11.2				BL_US98	289+48.45	289+56.33	LT/RT	2777		
			11.0				BL_US98	289+87.73	289+95.59	LT/RT	2778		
			9.4				BL_US98	294+31.96	294+38.41	LT	4856		
			10.1				BL_US98	294+36.71	294+43.67	LT	4857		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			17.2				BL_US98	294+92.38	295+04.37	LT/RT	2779		
			17.6				BL_US98	295+32.10	295+44.56	LT/RT	2780		
			12.5				BL_US98	295+71.97	295+80.72	LT/RT	2781		
			17.2				BL_US98	295+71.97	295+83.94	LT/RT	29606		
			17.6				BL_US98	296+11.68	296+24.13	LT/RT	29604		
			16.6				BL_US98	296+52.22	296+63.77	LT/RT	29609		
			16.5				BL_US98	296+92.26	297+03.90	LT/RT	29607		
			15.3				BL_US98	297+32.51	297+43.14	LT/RT	29612		
			14.6				BL_US98	297+72.74	297+83.04	LT/RT	29610		
			13.4				BL_US98	298+13.24	298+22.56	LT/RT	29615		
			12.6				BL_US98	298+53.48	298+62.42	LT/RT	29613		
			10.9				BL_US98	298+94.10	299+01.75	LT/RT	29614		
			9.1				BL_US98	299+34.96	299+41.39	LT/RT	29616		
			7.1				BL_US98	299+75.54	299+80.45	LT/RT	29621		
			5.1				BL_US98	300+15.93	300+19.56	LT/RT	29619		
			3.1				BL_US98	300+56.44	300+58.61	LT/RT	29620		
0711 11241	Thermoplastic, Standard, Yellow, 2-4 Dotted Guide Line /6-10 Dotted Extension Line, 6"	GM	0.0155		0.314		BL_US98	67+47.13	68+28.79	LT	31523		
			0.0228				BL_US98	71+03.45	72+23.73	LT	4580		
			0.0228				BL_US98	71+03.84	72+24.44	RT	4579		
			0.0152				BL_US98	74+41.23	75+21.26	LT	31772		
			0.0056				BL_US98	74+82.89	75+12.64	RT	31547		
			0.0208				BL_US98	103+22.46	104+32.16	LT	4581		
			0.0133				BL_US98	103+59.78	104+30.16	RT	4582		
			0.0107				BL_US98	179+80.51	180+36.98	LT/RT	25920		
			0.0144				BL_US98	179+81.21	180+57.31	RT	25919		
			0.0213				BL_US98	209+85.67	210+98.02	LT	4752		
			0.0210				BL_US98	209+86.24	210+97.21	RT	4753		
			0.0172				BL_US98	225+01.32	225+91.91	LT	4790		
			0.0201				BL_US98	225+01.47	226+07.38	RT	4791		
			0.0151				BL_US98	236+01.09	236+80.79	LT	4792		
			0.0140				BL_US98	236+01.26	236+75.34	RT	4793		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0170				BL_US98	262+43.48	263+33.01	LT	4808		
			0.0170				BL_US98	262+43.87	263+33.39	RT	4809		
			0.0160				BL_US98	294+02.82	294+87.35	LT	4861		
			0.0144				BL_US98	294+04.66	294+80.95	RT	4862		
0711 12101	Thermoplastic, Refurbishment, White, Solid, 6	GM	0.0080		0.023		BL_US98	71+63.23	71+82.07	RT	32182		
			0.0150				BL_US98	103+82.60	104+17.65	RT	31870		
0711 12125	Thermoplastic, Refurbishment, White, Solid, 24 For Stop Line And Crosswalk	LF	18.9		68		BL_US98	103+50.60	103+56.00	RT	31723		
			35.0				BL_US98	104+11.48	104+31.00	RT	31552		
			14.5				BL_US98	210+24.07	210+38.7	LY	32460		
0711 12201	Thermoplastic, Refurbishment, Yellow, Solid, 6	GM	0.0060		0.016		BL_US98	103+83.16	104+12.65	RT	31554		
			0.0060				BL_US98	103+85.10	104+12.22	RT	31553		
			0.0040				BL_US98	210+37.78	210+37.78	LT	32461		
0711 14123	Thermoplastic, Preformed, White, Solid, 12" For Crosswalk	LF	8.5		462		BL_US98	198+84.92	198+93.40	LT	12636		
			8.5				BL_US98	198+88.94	198+97.41	LT	12615		
			6.2				BL_US98	198+88.97	198+89.25	LT	12674		
			0.8				BL_US98	198+92.98	198+93.02	LT	12616		
			6.6				BL_US98	198+93.04	198+93.34	LT	30397		
			8.5				BL_US98	198+93.09	199+01.56	LT	12618		
			5.3				BL_US98	198+97.10	198+97.35	LT	30396		
			8.5				BL_US98	198+97.15	199+05.63	LT	12621		
			2.2				BL_US98	198+97.42	198+97.52	LT	12619		
			8.5				BL_US98	199+01.20	199+01.59	LT	12622		
			8.5				BL_US98	199+01.30	199+09.78	LT	12624		
			11.7				BL_US98	199+02.01	199+10.59	RT	30415		
			2.6				BL_US98	199+02.15	199+04.06	RT	30413		
			10.6				BL_US98	199+02.28	199+10.01	RT	30411		
			11.5				BL_US98	199+02.31	199+10.12	RT	30406		
			7.1				BL_US98	199+02.32	199+07.16	RT	30409		
			14.5				BL_US98	199+03.09	199+13.00	RT	30404		
			11.9				BL_US98	199+05.13	199+13.82	RT	30408		
			4.7				BL_US98	199+05.52	199+05.74	LT	12625		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			12.2				BL_US98	199+08.05	199+16.96	RT	30417		
			11.7				BL_US98	199+08.09	199+16.04	RT	30414		
			14.6				BL_US98	199+08.91	199+18.84	RT	30402		
			11.7				BL_US98	199+10.26	199+18.32	LT	12648		
			6.6				BL_US98	199+11.49	199+16.27	LT	30524		
			7.1				BL_US98	199+11.66	199+16.86	RT	30403		
			11.9				BL_US98	199+13.93	199+22.02	RT	30416		
			11.7				BL_US98	199+14.14	199+22.72	RT	30407		
			11.1				BL_US98	199+14.46	199+22.52	LT	30523		
			11.6				BL_US98	199+16.23	199+24.21	LT	30531		
			2.2				BL_US98	199+17.42	199+19.01	LT	30522		
			2.4				BL_US98	199+18.03	199+19.82	RT	30405		
			13.9				BL_US98	199+19.28	199+28.88	LT	30533		
			9.5				BL_US98	199+19.77	199+26.23	RT	30418		
			11.9				BL_US98	199+20.08	199+28.74	LT	30532		
			6.9				BL_US98	199+20.39	199+25.36	LT	30530		
			7.2				BL_US98	199+20.49	199+25.76	RT	30412		
			11.0				BL_US98	199+22.47	199+30.03	LT	30529		
			11.5				BL_US98	199+23.34	199+31.68	LT	30528		
			13.4				BL_US98	199+25.16	199+34.40	LT	12645		
			11.5				BL_US98	199+26.43	199+34.80	LT	12646		
			9.9				BL_US98	199+27.36	199+34.53	LT	12652		
			8.5				BL_US98	199+27.47	199+35.94	RT	12651		
			9.5				BL_US98	199+28.11	199+34.65	LT	12639		
			4.9				BL_US98	199+30.98	199+34.32	LT	12642		
			5.2				BL_US98	199+31.51	199+31.75	RT	30508		
			8.5				BL_US98	199+31.62	199+40.09	RT	12654		
			2.6				BL_US98	199+32.75	199+34.67	LT	12649		
			8.5				BL_US98	199+35.66	199+36.05	RT	12655		
			8.5				BL_US98	199+35.69	199+44.16	RT	12657		
			8.4				BL_US98	199+39.73	199+48.08	RT	12660		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			2.6				BL_US98	199+39.73	199+39.85	RT	12658		
			4.9				BL_US98	199+39.89	199+40.12	RT	30484		
			0.4				BL_US98	199+42.59	199+42.61	RT	12661		
			6.8				BL_US98	199+43.89	199+44.20	RT	30483		
			8.3				BL_US98	199+43.89	199+52.13	RT	12663		
			6.4				BL_US98	199+47.78	199+48.08	RT	12664		
0711 16101	Thermoplastic, Standard, Other Surfaces, White, Solid, 6	GM	0.0895		9.604		BL_US98	59+32.86	64+09.37	RT	24905		
			0.0915				BL_US98	59+33.00	64+11.60	LT	24906		
			0.0633				BL_US98	64+11.60	67+45.39	LT	26093		
			0.0089				BL_US98	67+45.50	67+76.75	LT	12402		
			0.0105				BL_US98	67+76.68	68+14.46	RT	4546		
			0.0108				BL_US98	67+98.81	68+37.23	LT	12403		
			0.0032				BL_US98	68+14.53	68+21.11	RT	4545		
			0.0465				BL_US98	68+37.16	70+82.75	LT	32136		
			0.0492				BL_US98	68+39.42	70+99.42	RT	2827		
			0.0060				BL_US98	68+39.83	68+43.04	RT	4549		
			0.0055				BL_US98	68+43.11	68+65.70	RT	4551		
			0.0506				BL_US98	68+65.73	71+33.09	RT	26094		
			0.0067				BL_US98	70+82.76	71+11.00	LT	4554		
			0.0033				BL_US98	71+11.02	71+15.96	LT	4555		
			0.0034				BL_US98	71+11.87	71+15.96	LT	4558		
			0.0009				BL_US98	71+15.95	71+15.96	LT	4556		
			0.0019				BL_US98	71+35.14	71+38.47	LT	4567		
			0.0041				BL_US98	71+38.56	71+48.87	LT	4566		
			0.0142				BL_US98	71+48.87	72+12.12	LT	4562		
			0.0495				BL_US98	71+93.99	74+55.18	RT	26096		
			0.0255				BL_US98	72+12.63	73+47.24	LT	26095		
			0.0058				BL_US98	72+96.45	73+24.77	LT	24907		
			0.0031				BL_US98	73+02.27	73+16.95	LT	32130		
			0.0096				BL_US98	73+16.96	73+64.36	LT	32131		
			0.0045				BL_US98	73+24.77	73+47.24	LT	24908		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0053				BL_US98	73+64.40	73+91.91	LT	32132		
			0.0024				BL_US98	73+91.83	74+04.39	LT	32134		
			0.0023				BL_US98	74+04.32	74+16.49	LT	32135		
			0.2180				BL_US98	74+16.49	85+67.46	LT	26097		
			0.3066				BL_US98	75+52.47	91+67.36	RT	26100		
			0.0352				BL_US98	85+67.46	87+53.45	LT	26098		
			1.5566				BL_US98	87+53.52	169+79.55	LT	26099		
			0.0765				BL_US98	91+67.40	95+69.34	RT	26101		
			0.0903				BL_US98	96+25.50	101+01.08	RT	26102		
			0.0305				BL_US98	101+01.08	102+59.94	RT	24900		
			0.0041				BL_US98	102+43.23	102+63.58	RT	24901		
			0.0213				BL_US98	102+43.23	103+55.95	RT	26103		
			0.0496				BL_US98	104+30.33	106+92.32	LT	2828		
			0.2575				BL_US98	104+41.05	118+00.70	RT	26104		
			0.0404				BL_US98	118+00.70	120+13.78	RT	4586		
			0.0030				BL_US98	120+13.78	120+29.69	RT	4589		
			0.0060				BL_US98	120+29.75	120+44.64	RT	4588		
			0.0014				BL_US98	120+66.64	120+67.83	RT	4591		
			0.0060				BL_US98	120+67.90	120+89.60	RT	4592		
			0.0184				BL_US98	120+89.60	121+85.91	RT	4587		
			0.0639				BL_US98	121+85.91	125+23.21	RT	26105		
			0.0780				BL_US98	125+23.21	129+35.07	RT	31725		
			0.5189				BL_US98	129+35.07	156+75.14	RT	26106		
			0.0065				BL_US98	156+75.18	156+94.76	RT	4594		
			0.0088				BL_US98	157+14.79	157+45.11	RT	4596		
			0.3142				BL_US98	157+45.10	174+03.96	RT	26107		
			0.0044				BL_US98	169+79.29	169+98.15	LT	24913		
			0.0028				BL_US98	169+98.23	170+04.23	LT	24912		
			0.0076				BL_US98	170+28.77	170+52.91	LT	4602		
			0.1606				BL_US98	170+53.01	179+00.86	LT	26108		
			0.0562				BL_US98	174+03.96	177+00.58	RT	12677		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.1987				BL_US98	177+00.60	187+49.82	RT	12678		
			0.0283				BL_US98	178+31.68	179+81.21	RT	2829		
			0.0075				BL_US98	179+00.86	179+40.48	LT	4607		
			0.0131				BL_US98	179+40.48	179+98.77	LT	4608		
			0.0871				BL_US98	180+43.52	185+03.33	LT	26112		
			0.2635				BL_US98	185+08.57	198+99.62	LT	26113		
			0.0591				BL_US98	187+49.82	190+61.75	RT	12679		
			0.0147				BL_US98	190+61.81	191+15.05	RT	4620		
			0.0013				BL_US98	191+14.52	191+15.00	RT	4623		
			0.0053				BL_US98	191+42.84	191+53.08	RT	4624		
			0.0115				BL_US98	191+53.08	192+01.78	RT	4625		
			0.1363				BL_US98	192+01.71	199+21.44	RT	26114		
			0.0037				BL_US98	199+02.01	199+02.43	RT	24933		
			0.2027				BL_US98	199+15.01	209+85.17	LT	26115		
			0.0037				BL_US98	199+34.38	199+34.80	LT	24997		
			0.1991				BL_US98	199+36.50	209+87.73	RT	26116		
			0.0358				BL_US98	207+97.09	209+86.24	RT	2831		
			0.0087				BL_US98	209+85.17	210+16.88	LT	4745		
			0.0093				BL_US98	209+87.78	210+16.92	RT	4749		
			0.0072				BL_US98	210+61.76	210+84.97	LT	4747		
			0.0100				BL_US98	210+63.30	210+96.03	RT	4750		
			0.2669				BL_US98	210+84.92	224+89.99	LT	26117		
			0.4727				BL_US98	210+96.08	235+96.60	RT	26118		
			0.0371				BL_US98	210+98.10	212+93.98	LT	2832		
			0.0911				BL_US98	220+20.20	225+01.07	RT	2833		
			0.0145				BL_US98	224+90.12	225+44.26	LT	12406		
			0.0057				BL_US98	225+55.84	225+56.09	LT	4754		
			0.0077				BL_US98	226+04.51	226+04.55	LT	4755		
			0.0122				BL_US98	226+16.46	226+40.73	LT	31767		
			0.0121				BL_US98	226+40.73	227+01.06	LT	31644		
			0.1174				BL_US98	226+70.87	232+90.85	LT	2834		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.1270				BL_US98	227+01.14	233+71.52	LT	26119		
			0.0428				BL_US98	233+71.21	235+95.92	LT	26121		
			0.0320				BL_US98	234+27.46	235+96.41	RT	2836		
			0.0077				BL_US98	235+96.01	236+21.58	LT	4801		
			0.0097				BL_US98	235+96.66	236+27.00	RT	4804		
			0.0066				BL_US98	236+53.07	236+70.14	RT	4805		
			0.0055				BL_US98	236+66.18	236+80.05	LT	4803		
			0.7377				BL_US98	236+70.20	275+65.36	RT	26122		
			0.0152				BL_US98	236+75.80	237+56.22	LT	2837		
			0.0001				BL_US98	236+80.05	236+80.08	LT	26022		
			0.0013				BL_US98	236+80.17	236+86.49	LT	26024		
			0.4814				BL_US98	236+86.57	262+28.40	LT	26124		
			0.0227				BL_US98	261+20.18	262+40.15	RT	2838		
			0.0027				BL_US98	262+28.44	262+40.97	LT	4817		
			0.0042				BL_US98	262+41.08	262+53.83	LT	4820		
			0.0011				BL_US98	262+53.94	262+56.22	LT	4819		
			0.0019				BL_US98	263+01.52	263+06.09	LT	4824		
			0.0021				BL_US98	263+06.10	263+12.41	LT	4821		
			0.0044				BL_US98	263+12.41	263+31.89	LT	4822		
			0.5769				BL_US98	263+32.02	293+78.06	LT	26125		
			0.0103				BL_US98	275+65.36	276+02.62	RT	30122		
			0.0098				BL_US98	276+25.22	276+57.31	RT	30124		
			0.3643				BL_US98	276+57.35	295+81.00	RT	26123		
			0.0500				BL_US98	291+33.84	293+97.80	RT	2839		
			0.0032				BL_US98	293+78.09	293+93.27	LT	4864		
			0.0056				BL_US98	293+93.37	294+13.01	LT	4866		
			0.0047				BL_US98	294+63.58	294+77.16	LT	4869		
			0.0001				BL_US98	294+77.16	294+77.45	LT	4870		
			0.0027				BL_US98	294+77.44	294+89.82	LT	4867		
			0.0175				BL_US98	294+89.82	295+82.06	LT	26126		
			0.0116				BL_US98	295+81.10	296+42.42	RT	29570		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0937				BL_US98	295+82.09	300+76.84	LT	29573		
			0.0260				BL_US98	296+42.40	297+79.57	RT	29571		
			0.0563				BL_US98	297+79.57	300+76.69	RT	29572		
0711 16201	Thermoplastic, Standard, Other Surfaces, Yellow, Solid, 6	GM	0.0635		8.422		BL_US98	59+32.52	62+67.69	LT/RT	2098		
			0.0635				BL_US98	59+32.55	62+67.29	LT	2097		
			0.0370				BL_US98	62+67.29	64+62.48	LT	2100		
			0.0712				BL_US98	62+67.48	66+43.07	LT	2099		
			0.0627				BL_US98	62+67.48	65+98.53	LT/RT	2102		
			0.0369				BL_US98	62+67.69	64+62.68	RT	2101		
			0.0481				BL_US98	64+62.48	67+16.30	LT	31541		
			0.0251				BL_US98	64+65.98	65+98.29	RT	31540		
			0.0092				BL_US98	65+98.29	66+45.48	LT/RT	2104		
			0.0086				BL_US98	65+98.53	66+43.07	LT/RT	2103		
			0.0089				BL_US98	66+45.48	66+92.37	LT	31745		
			0.0099				BL_US98	66+92.37	67+44.76	LT	31727		
			0.0055				BL_US98	68+21.01	68+30.79	RT	4540		
			0.0056				BL_US98	68+22.69	68+32.06	RT	4539		
			0.0492				BL_US98	68+38.13	70+97.96	LT	31520		
			0.0446				BL_US98	68+62.63	70+98.16	LT	31521		
			0.0070				BL_US98	71+22.78	71+35.12	LT	4568		
			0.0070				BL_US98	71+24.34	71+36.68	LT	4569		
			0.0037				BL_US98	72+17.69	72+24.36	LT/RT	2115		
			0.0034				BL_US98	72+18.08	72+24.50	LT/RT	2113		
			0.0488				BL_US98	72+23.54	74+80.95	LT/RT	2106		
			0.0488				BL_US98	72+23.73	74+81.01	LT/RT	2112		
			0.0486				BL_US98	72+24.44	74+80.82	RT	2110		
			0.0486				BL_US98	72+24.52	74+80.89	RT	2111		
			0.0064				BL_US98	75+05.97	75+14.86	RT	4574		
			0.0063				BL_US98	75+07.27	75+16.06	RT	4572		
			0.0167				BL_US98	75+10.52	75+98.10	LT/RT	2116		
			0.0166				BL_US98	75+10.57	75+98.14	LT/RT	2119		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0159				BL_US98	75+10.57	75+94.71	LT/RT	2117		
			0.0160				BL_US98	75+10.61	75+94.71	LT/RT	2118		
			0.0570				BL_US98	75+98.12	78+99.13	LT	2120		
			0.0570				BL_US98	75+98.15	78+99.16	LT	2123		
			0.0569				BL_US98	78+99.13	81+99.63	LT	2121		
			0.0569				BL_US98	78+99.13	81+99.63	LT/RT	30119		
			0.1133				BL_US98	83+00.65	88+99.09	LT/RT	2125		
			0.0910				BL_US98	88+99.08	93+79.49	LT/RT	2131		
			0.0746				BL_US98	89+85.45	93+79.42	LT	2153		
			0.0364				BL_US98	93+79.38	95+71.82	LT	2126		
			0.0364				BL_US98	93+79.53	95+71.58	RT	2130		
			0.0623				BL_US98	96+25.50	99+54.57	LT/RT	2127		
			0.0623				BL_US98	96+25.57	99+54.57	RT	2128		
			0.0768				BL_US98	99+54.41	103+59.74	RT	2137		
			0.0771				BL_US98	99+54.57	103+59.72	LT/RT	2135		
			0.0763				BL_US98	99+55.35	103+56.51	LT/RT	2136		
			0.0760				BL_US98	99+55.35	103+56.52	LT/RT	2138		
			0.0647				BL_US98	104+30.07	107+71.79	RT	2139		
			0.0647				BL_US98	104+30.36	107+72.09	RT	2140		
			0.0054				BL_US98	107+71.79	108+00.04	RT	2143		
			0.0621				BL_US98	107+71.90	110+99.63	RT	2141		
			0.0597				BL_US98	107+84.22	110+99.56	RT	2146		
			0.0029				BL_US98	107+84.22	107+99.62	RT	29402		
			0.0570				BL_US98	107+99.62	110+99.88	LT/RT	2150		
			0.0570				BL_US98	108+00.04	111+00.30	LT/RT	2144		
			0.0151				BL_US98	110+99.57	111+79.43	LT/RT	2142		
			0.0266				BL_US98	110+99.63	112+40.15	RT	2147		
			0.0151				BL_US98	110+99.82	111+79.43	LT	2151		
			0.0266				BL_US98	111+00.24	112+40.92	LT	2145		
			0.0994				BL_US98	112+40.92	117+65.52	LT	2160		
			0.0030				BL_US98	120+54.52	120+56.37	RT	4583		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0030				BL_US98	120+55.94	120+57.64	RT	4584		
			0.0037				BL_US98	157+03.61	157+06.10	RT	4600		
			0.0036				BL_US98	157+04.40	157+07.03	RT	4599		
			0.1150				BL_US98	168+24.15	174+31.37	RT	2163		
			0.0484				BL_US98	174+31.37	176+86.66	RT	2167		
			0.0585				BL_US98	174+32.26	177+41.13	LT/RT	2168		
			0.0567				BL_US98	174+36.96	177+36.50	LT/RT	2174		
			0.0473				BL_US98	174+36.96	176+86.26	LT/RT	2178		
			0.0096				BL_US98	176+86.12	177+36.50	RT	2172		
			0.0103				BL_US98	176+86.46	177+40.21	RT	2169		
			0.0456				BL_US98	177+40.21	179+80.81	RT	2180		
			0.0454				BL_US98	177+41.08	179+80.89	LT/RT	2179		
			0.0657				BL_US98	180+36.45	183+83.27	LT	2181		
			0.0014				BL_US98	180+36.50	180+41.81	LT/RT	2183		
			0.0535				BL_US98	180+40.54	183+23.17	RT	2185		
			0.0037				BL_US98	180+40.58	180+57.70	RT	25924		
			0.0033				BL_US98	180+41.94	180+57.23	RT	2184		
			0.0609				BL_US98	180+57.31	183+78.57	RT	2182		
			0.0503				BL_US98	180+57.74	183+23.17	RT	2186		
			0.0115				BL_US98	183+78.57	184+39.46	RT	2189		
			0.0003				BL_US98	183+80.40	183+82.10	LT	29414		
			0.0106				BL_US98	183+83.27	184+39.39	LT	2194		
			0.1254				BL_US98	184+39.39	191+01.45	LT	2190		
			0.1254				BL_US98	184+39.46	191+01.52	LT/RT	2193		
			0.0067				BL_US98	191+29.77	191+37.72	RT	4619		
			0.0067				BL_US98	191+30.77	191+38.64	RT	4618		
			0.1397				BL_US98	191+72.44	199+10.04	LT	2191		
			0.1399				BL_US98	191+72.64	199+11.34	RT	2192		
			0.0815				BL_US98	199+25.43	203+55.91	LT	2196		
			0.0816				BL_US98	199+26.69	203+57.30	RT	2195		
			0.0652				BL_US98	203+55.91	207+00.01	LT	2198		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0558				BL_US98	203+57.30	206+52.03	RT	2197		
			0.0558				BL_US98	203+57.30	206+52.03	RT	2201		
			0.0480				BL_US98	203+98.70	206+52.11	LT/RT	2205		
			0.0570				BL_US98	203+98.70	206+99.86	LT	2207		
			0.0103				BL_US98	206+52.03	207+05.42	LT/RT	2199		
			0.0092				BL_US98	206+52.11	206+99.86	LT/RT	2203		
			0.0540				BL_US98	207+00.01	209+85.39	LT	2209		
			0.0531				BL_US98	207+05.42	209+85.72	LT	2211		
			0.0020				BL_US98	210+40.39	210+40.53	RT	4788		
			0.0020				BL_US98	210+41.64	210+41.99	RT	4787		
			0.0540				BL_US98	210+96.88	213+82.08	RT	2212		
			0.0551				BL_US98	210+96.98	213+88.13	RT	2213		
			0.0695				BL_US98	213+82.08	217+49.67	RT	2214		
			0.0695				BL_US98	213+82.08	217+49.67	RT	2225		
			0.0098				BL_US98	213+88.13	214+38.58	LT/RT	2220		
			0.0673				BL_US98	213+93.59	217+49.59	RT	2227		
			0.0088				BL_US98	213+93.59	214+38.61	LT/RT	2219		
			0.0490				BL_US98	214+38.58	216+97.06	LT	2221		
			0.0306				BL_US98	214+38.61	215+99.98	LT	2224		
			0.0184				BL_US98	215+99.98	216+97.06	LT	2568		
			0.0157				BL_US98	216+96.86	217+79.65	LT	2234		
			0.0157				BL_US98	216+97.06	217+79.91	LT	2232		
			0.0096				BL_US98	217+49.65	218+00.22	RT	2230		
			0.0096				BL_US98	217+49.67	218+00.26	RT	2218		
			0.0304				BL_US98	217+79.54	219+39.68	LT	2235		
			0.0280				BL_US98	217+79.83	219+27.10	LT	2222		
			0.0163				BL_US98	218+00.25	218+86.30	RT	2231		
			0.0163				BL_US98	218+00.29	218+86.31	RT	2217		
			0.0078				BL_US98	218+86.30	219+27.10	LT/RT	2236		
			0.0084				BL_US98	218+86.31	219+30.09	LT/RT	2223		
			0.1082				BL_US98	219+30.16	225+01.16	LT	2240		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.1064				BL_US98	219+39.71	225+01.37	LT	2239		
			0.0058				BL_US98	225+67.86	225+71.43	LT	4843		
			0.0005				BL_US98	225+71.43	225+72.28	LT	4848		
			0.0025				BL_US98	225+72.28	225+82.42	LT	4846		
			0.0004				BL_US98	225+82.50	225+83.29	LT	4849		
			0.0136				BL_US98	225+83.31	225+92.32	LT	4844		
			0.1423				BL_US98	225+91.41	233+42.89	LT	2242		
			0.0046				BL_US98	225+91.50	226+12.00	LT/RT	2244		
			0.1405				BL_US98	225+94.05	233+36.14	LT	2247		
			0.0042				BL_US98	225+94.05	226+13.04	LT/RT	2250		
			0.1270				BL_US98	226+12.00	232+82.63	RT	2241		
			0.1268				BL_US98	226+13.04	232+82.63	RT	2248		
			0.0113				BL_US98	232+82.63	233+40.99	LT/RT	2243		
			0.0103				BL_US98	232+82.65	233+36.12	LT/RT	2249		
			0.0483				BL_US98	233+40.99	235+95.79	LT	2260		
			0.0479				BL_US98	233+42.94	235+95.71	LT	2259		
			0.0028				BL_US98	236+38.34	236+38.71	RT	4796		
			0.0028				BL_US98	236+39.51	236+39.64	RT	4795		
			0.0320				BL_US98	236+75.53	238+44.70	RT	2254		
			0.0318				BL_US98	236+75.54	238+43.61	RT	2251		
			0.0777				BL_US98	238+43.57	242+53.68	RT	2252		
			0.0106				BL_US98	238+44.72	238+99.60	LT/RT	2258		
			0.0715				BL_US98	238+50.52	242+27.71	RT	2255		
			0.0095				BL_US98	238+50.56	238+99.60	LT/RT	2257		
			0.0662				BL_US98	238+99.50	242+49.14	LT	2253		
			0.0622				BL_US98	238+99.53	242+27.79	LT/RT	2256		
			0.2556				BL_US98	242+49.14	255+98.54	LT	2261		
			0.2547				BL_US98	242+53.77	255+98.48	RT	2262		
			0.0810				BL_US98	255+98.52	260+25.94	LT	2267		
			0.0716				BL_US98	255+98.54	259+76.67	RT	2266		
			0.0798				BL_US98	256+03.71	260+25.03	LT	2263		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0704				BL_US98	256+03.71	259+75.40	LT/RT	2265		
			0.0096				BL_US98	259+75.41	260+25.02	LT/RT	2269		
			0.0096				BL_US98	259+75.41	260+25.01	LT/RT	2268		
			0.0098				BL_US98	259+76.74	260+26.73	LT/RT	2271		
			0.0403				BL_US98	260+26.01	262+38.74	LT	2272		
			0.0403				BL_US98	260+26.01	262+38.74	LT	2273		
			0.0401				BL_US98	260+26.80	262+38.74	LT	2275		
			0.0024				BL_US98	262+69.71	262+69.87	LT	4811		
			0.0034				BL_US98	262+69.95	262+83.09	LT	4825		
			0.0024				BL_US98	262+70.78	262+70.94	LT	4815		
			0.0028				BL_US98	262+70.94	262+82.08	LT	4827		
			0.0024				BL_US98	262+82.15	262+82.29	LT	4816		
			0.0024				BL_US98	262+83.13	262+83.29	LT	4813		
			0.0036				BL_US98	263+27.15	263+33.39	LT/RT	2317		
			0.0031				BL_US98	263+28.24	263+33.37	LT	2319		
			0.0695				BL_US98	263+33.30	267+00.02	LT	2276		
			0.0680				BL_US98	263+33.36	266+92.14	RT	2282		
			0.0695				BL_US98	263+33.39	267+00.12	RT	2277		
			0.0679				BL_US98	263+33.50	266+92.14	LT/RT	2280		
			0.1140				BL_US98	267+00.02	273+01.80	LT	2284		
			0.0022				BL_US98	276+13.73	276+13.90	RT	32164		
			0.0023				BL_US98	276+14.77	276+14.94	RT	32161		
			0.0170				BL_US98	281+76.22	282+66.16	RT	2292		
			0.0797				BL_US98	282+66.16	286+86.79	RT	2293		
			0.0572				BL_US98	286+86.61	289+88.52	LT/RT	2300		
			0.0651				BL_US98	287+01.44	290+45.29	LT	2296		
			0.0593				BL_US98	287+30.87	290+43.67	LT	2299		
			0.0488				BL_US98	287+30.87	289+88.29	LT/RT	2295		
			0.0107				BL_US98	289+88.32	290+43.63	LT/RT	2301		
			0.0109				BL_US98	289+88.54	290+45.09	LT/RT	2297		
			0.0295				BL_US98	290+45.07	292+00.63	LT	2302		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
			0.0295				BL_US98	290+45.11	292+00.67	LT	26076		
			0.0373				BL_US98	292+00.63	293+97.55	LT	2303		
			0.0373				BL_US98	292+00.67	293+97.64	LT	2305		
			0.0017				BL_US98	294+30.85	294+31.07	LT	4852		
			0.0036				BL_US98	294+31.13	294+44.79	LT	4859		
			0.0015				BL_US98	294+31.88	294+31.98	LT	4854		
			0.0030				BL_US98	294+31.98	294+43.69	LT	4858		
			0.0016				BL_US98	294+43.53	294+43.76	LT	4860		
			0.0016				BL_US98	294+44.61	294+44.84	LT	4853		
			0.0030				BL_US98	294+86.67	294+89.94	LT/RT	2314		
			0.0025				BL_US98	294+87.80	294+90.07	LT/RT	26079		
			0.0173				BL_US98	294+89.68	295+80.99	LT	2308		
			0.0173				BL_US98	294+89.81	295+81.04	LT	2309		
			0.0172				BL_US98	294+89.96	295+80.76	RT	2311		
			0.0172				BL_US98	294+90.15	295+80.76	RT	2310		
			0.0219				BL_US98	295+80.80	296+96.31	RT	29624		
			0.0219				BL_US98	295+80.80	296+96.31	RT	29593		
			0.0218				BL_US98	295+81.02	296+96.23	LT	29622		
			0.0218				BL_US98	295+81.04	296+96.25	LT	29592		
			0.0325				BL_US98	296+96.23	298+67.75	LT	29623		
			0.0325				BL_US98	296+96.25	298+67.78	LT	29594		
			0.0324				BL_US98	296+96.31	298+67.63	RT	29625		
			0.0324				BL_US98	296+96.31	298+67.63	RT	29595		
			0.0208				BL_US98	298+67.63	299+77.29	RT	29599		
			0.0206				BL_US98	298+67.75	299+76.69	LT	29627		
			0.0206				BL_US98	298+67.78	299+76.71	LT	29598		
			0.0207				BL_US98	298+68.24	299+77.29	RT	29626		
			0.0190				BL_US98	299+76.69	300+76.81	LT	29629		
			0.0190				BL_US98	299+76.71	300+76.81	LT	29603		
			0.0189				BL_US98	299+77.29	300+76.80	RT	29602		
			0.0189				BL_US98	299+77.29	300+76.81	RT	29628		

Summary of Signing and Pavement Marking

Pay Item Number	Pay Item Description	Units of Measure	Quantity		Total Quantity		Location					Design Notes	Construction Remarks
			P	F	P	F	Alignment	Begin Station	End Station	Side	Element ID		
0711 16231	Thermoplastic, Other Surfaces, Yellow, Skip, 6	GM	0.1165		1.704		BL_US98	81+99.63	88+14.91	LT	2156		
			0.0160				BL_US98	88+14.91	88+99.21	LT	2157		
			0.0159				BL_US98	88+99.30	89+83.45	LT	2158		
			0.0996				BL_US98	112+40.15	117+65.85	RT	2159		
			0.9579				BL_US98	117+66.51	168+24.21	LT	2162		
			0.1150				BL_US98	168+23.98	174+31.21	LT	2164		
			0.1142				BL_US98	267+00.15	273+03.00	RT	2287		
			0.0759				BL_US98	272+99.91	277+00.76	RT	2288		
			0.0939				BL_US98	276+84.99	281+76.34	RT	2289		
			0.0994				BL_US98	281+76.47	287+01.33	LT	2291		
...													
...													
...													