

Basis of Estimates Manual 2022

Table of Contents

Introduction

Chapter 1 – Glossary, Applications, Reports, and Project Data Validation

- 1.1 General
- 1.2 Definitions of Terms and Abbreviations
- 1.3 Applications
- 1.4 Project Data and Validation

Chapter 2 - Pay Items General Information

- 2.1 General
- 2.2 Pay Item Measurement and Quantity Accuracy
- 2.3 Pay Item Number Formatting/Legend
- 2.4 Pay Item Structure/Template
- 2.5 Pay Item Ranges and Other Variables
- 2.6 Displaying Pay Items in the Plans and Other Contract Documents
- 2.7 Changing/Updating Pay Item Descriptions in the Master File
- 2.8 Pay Items and Specifications

Chapter 3 – Project and Proposal Cost Estimates

- 3.1 General
- 3.2 Initial Work Program and Scope Estimates
- 3.3 Project Design Estimate
- 3.4 Revisions and Addenda
- 3.5 Estimating Systems for Designers

Chapter 4 – Pay Items for Alternative Contracts

- 4.1 General
- 4.2 Lump Sum Projects and Proposals
- 4.3 Design-Build Projects and Proposals
- 4.4 Push Button/Work Document Projects and Proposals
- 4.5 A + B Projects and Proposals

Chapter 5 – Blank (moved to web page)

Chapter 6 - Pay Item Selection and Requests

- 6.1 General
- 6.2 Pay Item Request Process
- 6.3 Generic Pay Items for Utility Work
- 6.4 Developmental Pay Items and Special Use Pay Items

Chapter 7 - Pay Item Documentation

- 7.1 General
- 7.2 Non-standard Work Included in Projects

Table of Contents 1

- 7.3 Choosing Between Specifications and Plan Details
- 7.4 Choosing Between Plan Details, Pay Item Notes, and Summary Table Design Notes Column
- 7.5 Federal Participation at the Pay Item Level

Chapter 8 – EQ Report and Summary Tables

- 8.1 Introduction
- 8.2 Summary Table Format
- 8.3 Order of Summary Tables in the EQ Report
- 8.4 Summary Tables and Instructions
- 8.5 Pay Items That Do Not Require a Summary Table
- 8.6 Lump Sum Contracts

Chapter 9 – Design Groups/Categories, Category Data, and Pay Item Alternate Groupings

- 9.1 General
- 9.2 Design Groups / Categories
- 9.3 Alternates

Revision History

By Chapter

Table of Contents 2

Introduction BASIS OF ESTIMATES MANUAL

I.1 PURPOSE

The **Basis of Estimates Manual** sets forth the standard methods of documenting design quantities, as well as selection criteria, for pay items for Florida Department of Transportation (FDOT) projects.

Pay items are used to define, quantify, and pay for items of work to be completed on the Department's Maintenance and Construction Contracts.

I.2 AUTHORITY

Sections 334.044(2), 20.23(3)(a), and 334.048(3), Florida Statutes (F.S.)

I.3 SCOPE

This procedure impacts anyone preparing construction plans or specifications for the Department.

I.4 GENERAL INFORMATION

Chapter 334 of the Florida Statutes, as part of the Florida Transportation Code, establishes the responsibilities of the State, counties, and municipalities for the planning and development of the transportation systems serving the people of Florida, with the objective of assuring development of an integrated, balanced statewide system. The Code's purpose is to protect the safety and general welfare of the people of the State and to preserve and improve all transportation facilities in Florida. Under Sections 20.23(3)(a) and 334.048(3), F.S., the Code sets forth the powers and duties of the Department of Transportation including adopting rules, procedures, and standards for the conduct of its business operations and the implementation of any provisions of law for which the Department is responsible.

I.5 DISTRIBUTION

This document is published online at http://www.fdot.gov/programmanagement/. Contacts, updates, and registration information are available at the Basis of Estimates link on the above internet web page.

I.6 REGISTRATION

Introduction Intro-1

All users are encouraged to register online with the FDOT Project Management Contact Database located at http://www.fdot.gov/designsupport/contactdatabase.shtm. Registered users will receive e-mail notification of major updates and bulletins.

I.7 REVISIONS and UPDATES

Basis of Estimates users are encouraged to submit comments and suggestions for changes to this manual to the Program Management Office. When ideas or suggestions are received, they will be reviewed by appropriate Design and/or Construction staff in a timely manner and will be coordinated with other offices affected by the proposed change. Issues warranting immediate change will be made with the approval of the State Estimates Engineer or State Program Management Engineer in the form of a *Program Management Bulletin*.

Program Management Bulletins will be posted online at http://www.fdot.gov/programmanagement/.

NOTE: Program Management Bulletins will remain effective until either:

- a) an official manual revision is published, or
- b) the Bulletin is made void.

The Program Management Office will coordinate proposed revisions or additions with affected offices within the Central Office. All new chapters and substantive revisions that result in policy change will be coordinated in accordance with the Forms and Procedures Office in accordance with *Procedure No. 025-020-002, Standard Operating System*, and the Executive Committee for concurrence.

Basis of Estimates Coordinator, FDOT State Program Management Office 605 Suwannee St., MS 34 Tallahassee, FL 32399-0450 http://www.fdot.gov/programmanagement/

Updates are posted online at least twice a year. Issues resulting in a *Program Management Bulletin* will be updated as approved by the State Program Management Engineer. Additions, minor issues, or corrections not requiring a bulletin will be updated as needed.

I.8 TRAINING

No training required. Optional training for the *Basis of Estimates*, reports, and supporting computer systems is available through the Estimating Systems Support section of the State Program Management Office.

I.9 FORMS

Introduction Intro-2

The Pay Item Request form is available online at http://www.fdot.gov/development/ The use of this form is optional; refer to *Chapter 6* for complete information.

Introduction Intro-3

Chapter 1

GLOSSARY, APPLICATIONS, REPORTS, AND PROJECT DATA VALIDATION

1.1 General

The definitions provided in this chapter are common terms used to describe or perform tasks related to construction cost estimating. Not all terms shown are found within this publication but are provided for reference and improved communication when working with the District Estimates staff.

The applications described in this chapter are related to the pay item and quantity data collected as part of the design documentation, effort of performing estimating tasks for determining the cost of the proposed work, and the need for adequate budgeting to meet the project needs and public commitments. Not all of these applications are accessed by the design team but are provided as an overview of the process to successfully prepare a project for advertisement.

Validation of the project data is important to ensure current and active pay items are included in the design documentation. Certain applications and reports accessed by the design team can aid in performing Quality Control of the project data entered within the Department's databases and applications. These resources and other reports are described in section 1.4.2.

1.2 Definitions of Terms and Abbreviations

Addendum: Changes made to a proposal after advertisement but prior to the letting.

Advertisement: Public solicitation to potential bidders for FDOT contracts.

Allowance: An amount or percentage of cost used to account for known items of work with quantities yet to be determined.

American Association of State Highway and Transportation Officials (AASHTO): Association representing highway and transportation departments whose goal is to foster the development, operation, and maintenance of an integrated national transportation system.

Alternative Contracts: Contract delivery method that, other than traditional Design-Bid-Build contracting, which leverage innovative means to improve the construction project, speed project delivery, and improve project delivery without compromising safety and quality. The types include Lump Sum, Design-Build, Push Button and A+B, etc.

Alternative Technical Concept (ATC): Process within Design-Build procurement method which allows the Design-Build firm to deviate from the RFP to allow for innovation, flexibility, time and cost savings on the design and construction of Design-Build projects while providing the best value for the public.

Authorization Estimate: Construction cost estimate used for federal authorization, advertisement, and the Work Program construction amount.

Bid Analysis Monitoring System (BAMS)/ Decision Support System (DSS): An AASHTOWare computer-based information system that receives data from AASHTOWare Project Preconstruction and supports business or organizational decision making activities.

Bid-Based Estimating: Method of cost estimating based on the preliminary design which uses historical bid data from prior projects.

Candidate List: List of projects proposed to be adopted into the Department's Five Year Work Program.

Class 1 Contract: Contracts let in Central Office.

Class 7 Contract: Contracts let in District office.

Class 9 Contract: Design-Build Contract.

Contingency: An amount or percentage of cost used to account for project unknowns.

Contract: Term for a proposal used after award. Contracts are identified by Contract Number.

Contract Plans: The signed and sealed documents prepared during the design phase and used by construction personnel to build a project.

Cost-Based Estimating: Method of cost estimating which uses material, equipment and labor costs, and production rates.

CER: Cost Estimate Review

CPAM: Construction Project Administration Manual

CRA: Cost Risk Assessment

CSRA: Cost and Schedule Risk Assessment

Design Groups: A group of construction items that are specific to project work areas, such as structures, roadway, or signalization, that are represented by a numeric value. Design Groups are also known as categories in AASHTOWare Project Preconstruction and Designer Interface.

Design Quantities and Estimates (DQE) Application: A computer application used during design phases which produces detailed construction cost estimates for roadway and bridge projects.

Designer Interface: Department developed web-based program that interfaces with PrP and is used by designers and estimators to enter pay item and quantity information.

Engineer of Record (EOR): Individual who signs and seals documents prepared during the design phase and used by construction personnel to build a project.

Engineer's Estimate: Cost estimate representing the reasonable cost of a construction project, usually produced by the EOR of the contract plans.

Estimator: Estimates Office staff member who prepares construction cost estimates for the Five Year Work Program.

Estimates Report Tracking System (ERTS): Computer reporting tool that tracks the history of changes to long range and detailed construction cost estimate values; queries other systems for data, does not house any of its own data.

Exceptions: Construction cost estimates within the Five-Year Work Program which do not meet certain criteria. For Design Exceptions, see FDOT Design Manual 122.

Fiscal Year: FDOT fiscal year begins on July 1_{st} and ends June 30_{th} each year. For example, July 1, 2016 will start fiscal year 2017.

Fixed Price Pay Item: A pay item where the unit price is set by the Department at the project level. The pay item appears on the proposal/bid documents with a set unit price and in the bidder's Expedite file. Fixed price pay items contain the words "Do Not Bid" in the pay item description.

Forms and Procedures Library: Location of the Florida Department of Transportation Forms and Procedures; located at https://pdl.fdot.gov/.

FHWA: Federal Highway Administration

Gap: The dollar amount that the total low bid is either above the High Tolerance or below the Low Tolerance.

Initial Contingency Amount: Cost, as defined by Section 7.4.6.1 of the Construction Project Administration Manual, added to the construction cost estimate for unforeseen work.

Intelligent Transportation Systems (ITS): Integration of advanced communications technologies into transportation infrastructure.

Letting: Process of receiving and processing bids, at a predetermined date and time, for a specific listing of proposals.

Letting ID: The Letting ID is comprised of eight characters in the format ##YYMMDD, using two numbers for each District (i.e. 07 for District 7) or CT for Central Office lettings, followed by two digits for year, two digits for month, and two digits for day.

Long Range Estimating (LRE) Application: Parametric estimating computer application used early in project development, prior to determining detailed quantities and pay items, which produces conceptual construction cost estimates for roadway and bridge projects.

Lump Sum: Projects bid as one pay item that represents the detailed scope of work contained in the plans.

Materially Unbalanced: A bid that generates reasonable doubt that award to the bidder would result in the lowest ultimate cost or, one that could cause a switch in low bidder due to a quantity error.

Mathematically Unbalanced Bid: A bid that contains lump sum or unit bid items that do not responsibly reflect the actual costs (plus reasonable profit, overhead costs, and other indirect costs) to construct the item. A mathematically unbalanced bid is the first step in determining if a bid is materially unbalanced.

NEPA: National Environmental Policy Act

Non-Bid Pay Item: A pay item included in a project and proposal with the goal of encumbering funds, without affecting the bidder's total bid. The pay item does not appear in the bidder's proposal/bid documents.

Notice to Bidder: A document that lists pay items with significantly unbalanced bids that requires an explanation and confirmation of the unit price bid from the contractor.

Official Estimate: Construction cost estimate used for evaluating bids received on a proposal and protected by Section 337.168(1), Florida Statutes.

Parametric Estimation: Method of cost estimating based on the conceptual design which using modeling tools, typical characteristics, and historical costs.

Pay Item: A number representing work in accordance with the FDOT Standard Specifications for Road and Bridge Construction or Contract Documentation.

Plans, Specifications, and Estimate (PS&E): The contract plans, specifications, and estimate package submittal used for project authorization, advertisement, and letting.

Project: Planned construction activity with set limits and scope, as defined in the Department's Work Program.

Projects of Division Interest (PoDI): Projects which FHWA has determined have an elevated risk, contain elements of higher risk, or present a meaningful opportunity for FHWA involvement to enhance meeting FHWA program or project objectives.

PD&E: Project Development and Environment

Project Manager (PM): Staff member responsible for management of a component of the Work Program; project managers are responsible for managing the production of plans, specifications, and estimates for projects in the Department's Work Program.

Project Preconstruction (PrP): part of the AASHTOWare suite of software which facilitates letting.

ProjectSuite Enterprise Edition (PSEE): Application which supports transportation construction project development activities and processes; PSEE pulls information from Work Program, Consultant Invoice Transmittal System (CITS), and Enterprise Electronic Document Management System (EEDMS).

Project Unknown Factor: Factor used in the process of estimating to account for unknowns that may be added to the project.

Proposal: Project or group of projects submitted as one contract for bidding purposes. Proposal Number refers to the Contract Number prior to award.

Revisions: Changes made to a proposal after acceptance of the PS&E submittal prior to advertisement.

RFP: Request for Proposal

RFQ: Request for Quote

Specifications Package: The signed and sealed document prepared for inclusion in the contract documents, which is comprised of special provisions, developmental specifications, supplemental specifications, and appendices.

Significantly Unbalanced Bid: A bid that is extremely low (mathematically unbalanced) and typically not practical to construct for the price submitted.

Snapshot: A copy of a project cost estimate detail or total amount saved in LRE or DQE which can be used to graph the change in cost of the project at various milestones throughout the project's development.

Trns•port: Predecessor to AASHTOWare Project Preconstruction (PrP). Trns•port was replaced by AASHTOWare Project Preconstruction at FDOT on June 1, 2015.

USDOT: United States Department of Transportation

Webgate: This FDOT website is a location of links to multiple AASHTOWare applications and other applications. It contains links to Designer Interface, AASHTOWare Project Preconstruction, LRE, AASHTOWare Project Webgate Reporting, etc.

Work Program: The statewide project specific list of transportation system improvements that meets the objectives and priorities of the Florida Transportation Plan.

Work Program Administration (WPA): Department mainframe database containing project descriptions, estimated costs, and scheduled phases for all past and present Department projects; WPA is a part of the Financial Management (FM) system.

Work Type: PrP field describing the majority of work on a proposal.

1.3 Applications

The designer will be granted access to applications and reporting portals to facilitate entering and verifying project pay items and other project related data. Coordinate with the Project Manager on what access will be granted as some districts perform data entry and validation tasks with FDOT staff while other districts contract design consultants to perform these tasks.

The Long Range Estimating (LRE) application contains the pre-design project scope and cost estimate covering the proposed work. Some districts require the designer to populate this application with the project information necessary for early project development phases.

The Design Quantities and Estimates (DQE) application has public links available to the designer for viewing available pay item configurations (Pay Item Structures (Templates) and variables) and currently active items (Master Pay Item List). These links are available on the top menu on the login screen. No log in is required to access these links to the pay item reference information.

AASHTOWare Project Preconstruction (PrP) is part of a suite of programs developed by AASHTO (American Association of State Highway Transportation Officials). Many states around the country use this suite of programs for their transportation contracts. Additional information is available at http://www.aashtoware.org/ FDOT uses the Project Preconstruction (PrP) module. Details on the modules are available at https://www.aashtoware.org/products/project/project-modules/

The Designer Interface (DI) is available to the designer to facilitate the data entry necessary for pay items and quantities that are representative of the project's scope. The Designer Interface enables the designer to load pay item and quantity data into AASHTOWare PrP without needing to access that application directly. Automated data validation features are applied within DI to ensure accurate population of data into PrP. Once the pay items are loaded, DQE is utilized by Department Estimates staff to develop the construction cost estimate.

The Webgate menu is a FDOT portal that serves as a doorway to the Designer Interface, the AASHTOWare Project Webgate Reporting Login, and various other applications.

LRE, DI, and reports are accessed with a RACF user ID and password. The design project's Project Manager facilitates requests for access by designers which may be accessed via the Department's websites for Estimates and for the AASHTOWare Project reporting tools (Webgate, and includes DI).

1.4 Project Data and Validation

1.4.1 General

Once assigned to a project, the designer should verify:

- a) that the project exists (or that proper control has been given)
- b) that all project header information is correct

If proper control is not given, the project will not appear on the designer's list of available projects. The designer should contact the District Estimates Office to request access.

If the project appears on the Project List with a lock, another user may be accessing the project. If the lock remains, contact the District Estimates Office; the lock may be the result of closing a browser without closing the project from editing.

Many of the Webgate reports are available to any user with access to the Reports Menu. The reports listed below are generally used by the Designer, with the "Designer" role. Users may not have access to all of the reports listed below.

1.4.2 Reports and Data Extracts

Project Edit Report

The Webgate **Project Edit Report is the single most important report.** It should be run at the project level after updating any items or quantities, after an update bulletin, or after a project has been idle or "shelved" for a period of time. In addition to listing the current items and quantities, this report will provide an item check based on the proposed letting date. For projects with a structures category, this report MUST be used to review structures header information.

Master Pay Item List Report

Designers are encouraged to use the Master Pay Item List online through DQE. This report is generated from a "live" database and is the primary source of all pay items. The Webgate Master Pay Item List is a list of items currently available in PrP. It also includes valid (effective/obsolete) dates. A Spec flag is assigned to all pay items for non-standard work. See Chapter 2 for more information. Additional items may be opened upon request; refer to Chapter 6 for additional information.

Summary of Pay Items Report

For Summary of Pay Items Report requirement, see FDM 902 for further information.

Item Average Unit Cost by Item Number

This Webgate report will provide historical project information for specific pay items. Note: The pay items must be entered individually, rather than as a group. This report is helpful when detailed project information is needed for a specific pay item.

Item Average Unit Cost by Item Range

This Webgate report provides a historical average for a pay item range, over a specified date range. This report is helpful when general price information is needed for selected pay item(s).

Custom Reports

The State Program Management Office has the ability to create and/or run custom reports for user specified criteria. Please contact your District Estimates Office if custom reports are desired.

Chapter 2

PAY ITEMS GENERAL INFORMATION


2.1 General

The purpose of this Chapter is to provide general information about pay items, list common units of measure, and assist users with understanding the pay item structure/template. It will also assist users with understanding how/why pay items are formatted and displayed in the plans.

This chapter is a guide for understanding pay items, not a restriction on how they may/may not be used. Each pay item group will be evaluated based on the many needs of our customers: Design, Estimates, Construction, Maintenance, Traffic Operations, Contracts, and Management. It should be understood that the needs of one group may be considerably different from those of another. Communication between these groups is essential whenever a new pay item request is evaluated.

The pay item format is shown below. More information on the pay item format and variables used is available in sections 2.3 and 2.4.

Pay Item Format

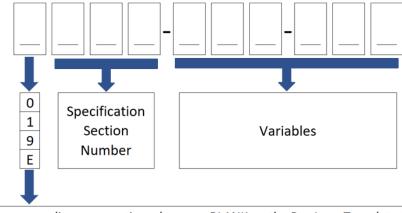

- 0 = Zero preceeding spec section; shown as BLANK on the Pay Item Template (Structure)
- 1 = Utilities
- 9 = Construction Use; for Contract changes during construction
- E = Maintenance Use

2.2 Pay Item Measurement and Quantity Accuracy

2.2.1 Unit of Measurement Abbreviations

Listed below are selected Unit of Measure abbreviations used in the Basis of Estimates.

Abbreviation	Unit of Measure	Precision
AC	Acre	0.01
AS	Assembly ¹	1
BF	Board Feet ³	1
CF	Cubic Foot	0.1
CY	Cubic Yard	0.1
DA	Day	1
EA	Each	1
ED	Each Day	1
FD	Feet-Day	1
GA	Gallon	1
GM	Gross Mile	0.001
HR	Hour	1
LB	Pound	1
LF	Linear Foot	1
LO	Location	1
LS	Lump Sum	1
LU	Luminaire ¹	1
MB	Board Measure/	0.1
	Thousand Feet	
MG	Thousand	1
	Gallons ³	
MH	Man-hour ²	1
MI	Mile	0.001
MO	Month ³	1
NM	Net Mile ^{3, 4}	.001
PI	Per Intersection ¹	1
PM	Per Mile ^{3, 4}	1
PS	Per Set ¹	1
SF	Square Foot	1
SY	Square Yard	1
TN	Ton	0.1

¹ Units which will be replaced with unit of Each (EA) upon pay item/specification update. See details below.

Conversion to Each: Units of measure previously identified as assembly, luminaire, plant, or other units will be changed to EA, as specifications are revised. The item's description should indicate the item to be measured with the EA unit of measure.

² Units will be replaced with Hour (HR), upon pay item/specification update. See details below.

³ Unit used by Maintenance pay items only

⁴ Unit will be replaced with Mile (MI), upon pay item/specification update.

2.2.2 Quantity Totals Precision and Rounding

Precision is noted on the abbreviations table above. Calculations are performed with one additional significant figure, and then rounded to the above precision for the quantity total.

As a quick guide, all units are paid to the nearest whole number, except for:

0.1: Cubic Yard, Cubic Foot, Tons, MB (lumber)

0.01: Acre

0.001: Gross Mile (stripe)

Rounding shall be completed in accordance with the common rule: If the number you are rounding is followed by 5, 6, 7, 8, or 9, round the number up. If the number you are rounding is followed by 1, 2, 3, or 4, round the number down. DO NOT use "up rounding", which will always round up the next value. For example: A calculated total of 132.3 ft should be shown as 132 ft, and NOT up rounded to 133 ft.

The pay items in the automated Summary Tables in the EQ Report have precision and rounding in accordance with this Chapter. See Chapter 8 for additional guidance.

2.2.3 Lump Sum Pay Items with Secondary Units

Secondary Units apply to Lump Sum (LS) pay items. When a lump sum pay item has secondary units other than another lump sum (LS/LS), the designer must enter the estimated secondary quantity into the Designer Interface. Estimating reports will show the secondary units for estimating purposes. The Project Summary, Proposal Summary, and other bid document reports will show the primary LS units with a quantity of 1 for *bidding* purposes, while detailed Summary Tables show secondary unit and quantities.

Example: 102-1-1 Maintenance of Traffic, LS/DA has a secondary unit of days. After the designer enters the number of MOT days for that project number, estimating reports will show the number of days while the Proposal Summary of Quantities will show 1 LS. However, secondary unit of DA and the number of MOT days will be shown on Estimated Quantity Report (EQR).

For Lump Sum items with a secondary unit of Lump Sum (LS/LS), partial payments will be made based on the percentage completed, per Section 9 of the specifications. Percentage will be rounded to 2 decimal places (0.01 of the total quantity of 1).

Additional guidance for pay items with secondary units may be included with the pay item number details. Refer to BOE Chapter 9 for guidance on Supplementary Descriptions. Refer to Chapter 8 for guidance on documenting work and materials for Lump Sum items. NOTE: Lump Sum pay items are NOT PERMITTED on Push Button/Work Document Contracts. Additional details are included in Chapters 6.

2.2.4 Plan Quantity Concept

Plan Quantity Measurement is defined in 9-1.3 of the specifications. Estimated quantities must be calculated and documented as accurately as possible. Plan Quantity pay items shall not include contingencies in the quantity calculation.

2.3 Pay Item Number Formatting / Legend

When viewing items in the BOE within DQE, pay item fields are shown in the following format:

Pay Item Template Structure Detail

Structure ID Title

(XXXX-XXX) (Title with nomenclature derived from spec)

Unit Plan Quantity?

(See above) (Yes or No)

Notes (Important Notes or Dates)

Details (Details and usage recommendations)

Plan Summary Box (Summary Box/Table title)

References (As appropriate)

PPM/FDM Chapter(s) (As appropriate)

CPAM Chapters (As appropriate)

Other (As appropriate)

Standards (Associated Standard Plans Index/Indices)

Specifications (Associated Standard Specifications Section(s))

Struct. (XXXX-XXX, Title, Unit)

(This area describes the variables and what they represent)

(X = Variable 1) (Y = Variable 2) (Z = Variable 3, etc.)

Pay Items (List of open and active items under this structure/template)

Each of the above fields are clarified below:

Structure ID: Each 10 character Pay Item is structured into three parts: 1234-567-890. Spaces, as well as digits, may be used to detail an item and are an important part of the template that is often mistyped/overlooked.

Within the first group (first 4 characters):

- the leading digits can be 0, 1, 9 or E. See 2.1 for definitions.
- the remaining digits (second through fourth digits) identify the applicable Specification Section.

The two proceeding groups (fifth through tenth spaces/digits) are descriptive fields, as detailed for each item. These variables are described under the "Struct." field (see below).

Note: the 0900 series items are developmental, special, and/or project specific. (See the applicable pay item group for more information). In those instances, the *middle* group of digits may identify the applicable Specification Section.

Title: The structure level description of the pay item group. Whenever possible, the title should use common terminology. This description may be abbreviated on some reports, due to space constraints. The complete, "Long Description", is used whenever possible.

Unit: Unit of measure and precision (decimal places) are defined in this chapter. When secondary units are shown, they are intended for estimating purposes, and should be documented in the EQ Report as instructed (see BOE Chapter 8).

Plan Quantity?: Indicator that this item is, or is not, designated to be paid under the Plan Quantity concept, per Article 9-1.3.2 of the Specifications. The pay item's applicable specification section will identify measurement and payment details.

Important Notes or Dates: Many pay items are opened or blocked with an effective/obsolete date. Verify that these dates correspond with a project's scheduled letting date. The Designer Interface and/or reports will verify valid dates for selected pay items.

Important dates are normally shown in this field for 1 year after implementation of a change. Longer or shorter durations may be used, based on the change and number of projects impacted.

Detail: Description of the most common usage of the pay item, intended to assist designers with the selection of pay items. Also includes, when necessary, detailed information useful to the designer for calculating quantities and determining related pay items. Text may include "Use When...", "Do not use when...", or "Estimate xx items per...".

Comments from any BOE user are welcome to enhance this information. Details must follow current Specifications, Standards, or other FDOT documents.

References- FDM Chapter, SDGs, Other: Links are provided to applicable FDOT Design Manual Chapter(s), Structures Design Guidelines, or other design references.

Standards: Indicates the index sheet number(s) for the applicable Standard Plans. When the index number is listed in the pay item description, the pay item **must** be used in accordance with the referenced standard. Contact the governing District's Specifications, Estimates, and/or other Responsible Office for non-standard applications. Non-standard applications may be required to use a different pay item

number, due to differing cost history.

Specifications: Links are often provided to the current FDOT Standard Specifications (Specifications eBook), applicable specifications section, and/or the specifications library. These links are for reference purposes only; the designer is responsible for using applicable specifications, as available from the State Specifications Office, for the project's letting date. Contact your District Specifications Office for further assistance.

Struct: Displays the structure, or *template*, of how the item is numbered, titled, and its unit of measure. Directly below the structure/template will be the list of variables (if applicable) that are used in the item structure, and their respective operations, values, descriptions, sizes, etc. Notes and/or restrictions may be listed here as well, to describe how the variables may/may not be formatted to represent valid combinations.

Pay Items: List of all currently open and active pay items under the given structure.

2.4 Pay Item Structure/Template

The Pay Item Structure/Template may vary between items, but the intent is to define the operation and variables needed to pay for the work and/or materials provided. Additional operations may be added per request.

2.4.1 Common Operations

Valid operations and numbering may vary by item (some operations may not be valid; additional operations may exist):

- 1 (Furnish & Install)
- 2 (Furnish)
- 3 (Install)
- 4 (Replace)
- 4 (Relocate)
- 4 (Repair)
- 5 (Adjust & Modify)
- 6 (Remove)
- 7 (Preventative Maintenance)
- 8 (Diagnostic and Minor Repair)
- 9 other item specific operation, as needed

The specifications normally describe furnish & install operations. For all other operations, always verify that the specifications/plan details correctly and completely describe the work to be completed. Refer to Chapter 7 for assistance with determining if a Modified Special Provision (MSP), Technical Special Provision (TSP) or plan detail is needed.

FURNISH & INSTALL: Includes all work and materials necessary for a complete

installation in accordance with the contract documents (plans, specifications, standard plans, etc.).

FURNISH: This operation is valid for very few pay item groups. Approvals by the responsible office may be required for each project. Do not furnish additional items to FDOT maintenance yards using construction funds. When requested, and funded by the maintaining agency, the furnish only item may be used. Plans or specifications must detail instructions for delivery of item(s) to the maintaining agency. Do not use separate "Furnish" and "Install" pay items for the same item of work.

INSTALL: To be used ONLY when the item is to be furnished by the Department or other maintaining agency. Plans or specifications should clearly identify the item(s) to be installed, pick-up/delivery instructions, as well as installation instructions. Payment includes any incidentals necessary (furnished by the Contractor) for a complete installation.

RELOCATE: Ensure that the existing item is in good condition; it may not be cost effective to relocate an old/obsolete item. Plans or specifications should clearly identify the item and initial/final locations. As needed, detail the incidental items (included in relocate item payment) to be furnished by the Contractor for a complete installation. Clearly identify conditions under which item replacement (damaged by contractor) is needed.

ADJUST/MODIFY: Detail minor work to be completed by the Contractor. Incidental items are to be furnished by the Contractor. This operation may include retrofits.

REHABILITATE: Includes the removal and replacement of an item, as detailed in the contract documents. Designer should ensure that materials and installation instructions are available to the contractor.

REMOVE: Plans or specifications should identify if contractor is to take ownership, stockpile, or deliver item(s) to a FDOT maintenance yard.

PREVENTATIVE MAINTENANCE: Work to be completed to extend the useful life of a product, as allowed by Federal Highway Administration (FHWA). This does not include routine maintenance, such as litter removal, mowing, or graffiti removal. Details must be included in the contract documents to describe the work to be completed.

PLUG & PLACE OUT OF SERVICE: Plans or specs should identify materials and work to be completed.

DIAGNOSTIC AND MISCELLANEOUS REPAIR: This is normally a maintenance operation to determine the work required to return an item to full working order. If components or assemblies are needed to complete the repair, they will be paid under related pay items, i.e. Furnish & Install, Replace, or Install.

SPECIAL/CUSTOM: To be used only when there is a significant deviation from the standard item or work to be completed: existing specifications and/or standards do not apply. Complete details including description, materials, installation, maintenance, method of measurement, and basis of payment are to be included in the plans or specifications. Project Specific Pay Items may be recommended for unique situations.

2.4.2 Equipment and Materials

When there is a need for the design to specify the equipment and/or materials to be installed (i.e. solar versus AC power, or standard versus preformed thermoplastic), the equipment or materials may be included within the pay item structure. Selection guidance should be available in the supporting documentation or handbook, to ensure consistent use of the item.

If no selection guidance is available, all equipment and material options, per the specification, should remain a contractor option.

2.4.3 Construction Means and Methods

For most specifications, acceptance criteria are based on the end result or performance criteria; the contractor's means and methods, equipment used or how something is installed, is not a factor. The pay item structure should not differentiate various means and methods, unless the approved specification includes these requirements.

Project specific pay items may be used when approved specifications identify means and methods that will likely cause significant bid price variations.

2.4.4 Maintenance Office Contracts

Maintenance Office contracts deviate from normal construction contracts, due to different specification needs. Some pay items are reserved for Maintenance Use Only, and are supported by Maintenance Specifications. When pay items are identified for Maintenance use, ensure that contract needs and applicable specifications are available/applicable, as needed. More information and links to the current Maintenance Specifications can be found on the FDOT's Program Management website.

2.5 Pay Item Ranges and Other Variables

The pay item structure/template (###-abc-def) should be used to define parameters which affect the price (i.e. size, shape, material), where variables "a" through "f" are detailed as needed. Parameters which do not affect the price may be detailed in the plans; additional pay item variables will not be created for these parameters. Limited structures can be used to encourage price competition between products that perform similar functions and/or provide similar end results (i.e., more items, less history per item).

Ranges are established to combine items/sizes with similar installed costs. When a pay item range is used, the designer must specify the specific size/shape needed on the plans and/or tabulation sheet(s). Ranges are not intended as a "contractor's option".

For most reports, including the Master Pay Item List and Project Edit Report, descriptive information such as size, shape, and color will be included after the primary description. The title and/or description may include abbreviations when the pay item is created.

Currently open pay item numbers are shown following the pay item structure. For additional information on opening or requesting new pay items, refer to Chapter 6.

2.6 Displaying Pay Items in the Plans and Other Contract Documents

2.6.1 General

Pay item numbers and descriptions may vary, depending on where it is displayed and the available space. When referring to a **group of pay items**, the format XXX- XXX- is normally used, with the last group of variables omitted. When referring to individual pay item numbers, the complete Pay Item Number format XXXX-XXX is used with the full item description. Below are some exceptions and guidelines.

Pay item descriptions must remain as shown in the BOE and as provided from the various system reports. This is the description used for the contract bid documents through final payment. See Chapter 6 for information about requesting pay items when non-standard applications require other descriptions.

2.6.2 Displaying Pay Items in Specifications

Specifications normally apply to an entire **group of pay items**. Therefore, only the group level of the Pay Item Structure is shown in the specification (XXX- XXX-) with the group level description. Placeholder letters for the pay item variables are not included with the specification.

2.6.3 Displaying Pay Items from Applications or Reports

Reports normally apply to specific **pay item numbers**. The complete pay item number should be used with the pay item's description. The complete pay item description should be used, as shown in the Master Pay Item List (long description). NEVER alter the application's report/output; do not change report content or format.

2.6.4 Displaying Pay Items in Plans (Summary of Pay Items, Summary Tables, Tabulation Sheets, and Notes)

For projects following the 2021 FDM and later, see additional guidance in BOE Chapters 3 and 8. The Summary of Pay Items will not be included in the plans. The Summary Tables within the Estimated Quantities (EQ) Report will replace the Summary Boxes and Tabulation Sheets.

Summary Tables may be a combination of CADD automation and user input data with formatting. Quantities are summarized by pay item number, per BOE Chapter 8. The pay item description, automated by CADD software or manual input, shall be consistent with the Pay Item Template in BOE.

When pay items are shown in the plans, a dash is normally used to separate the format group numbers. When referring to a pay item group in the plans or specifications, the variables may be omitted, with only the numerical part of the pay item structure/template included; these should also follow the pay item structure/template. When referring to a specific pay item number, the complete number should be shown.

Some applications and reports (CADD, Designer Interface, or other) may omit the dash in their default formatting. The spaces within a pay item number, or lack thereof, have significance in these situations, and MUST be retained. The designer must NEVER manually add or delete a dash or space from a report or application output.

2.7 Changing/Updating Pay Item Descriptions in the Master File

In general, pay item descriptions cannot be changed or updated, due to the impact on the historical database and previously let contracts. Minor clarifications will be considered, depending on the scope of the change and project impact. Contact the Basis of Estimates Coordinator for item specific concerns.

2.8 Pay Items and Specifications

2.8.1 General

As noted in other sections of this chapter, the first group of digits in the pay item structure/template corresponds to the applicable specification section. The following table is helpful for finding the pay item group. Note that it does not include all possible section numbers; it is only a guide to help identify "Where to find it..."

2.8.2 Where to Find Pay Items in the Specifications

Pay Item Group/ Specification Section	Description, including key words for searches
101	Mobilization
102	Maintenance of Traffic
104	Erosion Control
107	Litter Removal and Mowing
110	Clearing and Grubbing
120-175	Excavation, Embankment, and other Earthwork
200s	Base Courses
300-341	Bituminous Mixtures, Milling, Superpave, Friction Courses
349	Ultra High Performance Concrete
350-353	Concrete Pavement
400	Concrete Structures
415	Reinforcing Steel and FRP Bars
425-446	Drainage: Inlets, Manholes, Junction Boxes, Pipe, Trench Drain, Underdrain, French Drain, Edgedrain
450	Precast, Prestressed Concrete
455	Structures Foundations: Piling, Drilled Shafts
470	Timber Structures
508-510	Movable Bridges: Navigation Lights, Machinery
520s	Concrete Gutter, Curb, Barriers, Traffic Separator, Sidewalk
523	Patterned/Textured Pavement
530	Riprap
534	Sound Barriers
536-538	Guardrail
550	Fencing
560-561	Coating Structural Steel
570-580	Grassing, Seeding, Sodding, Landscaping, Trees, Plants
600s	Signalization: ITSFM, Fiber Optics, Conduit, Mast Arms, Detectors, Cabinets
700-706	Signing, Delineators, RPM's
709-714	Pavement Markings: Paint, Thermo, Tape
715	Lighting: Poles, Conduit (see also 630 for conduit)
800s	Mass Transit
900s	Special, Developmentals, Trial Items
1000s	Utilities

2.8.3 Specification Flags on Pay Items

Several letters or "flags" are used on the Master Pay Item list to indicate when a non-standard specification and/or Plan detail is likely needed. Flags are listed with further guidance below:

A= Approvals needed

B= BOE guidance

D= Developmental Spec

E= Estimates Use Only

G= Generic Item

T= Technical Special Provision

M= Maintenance use only

P= Plan Details

R= Permit

S= Modified Special Provision

Approvals: Contact the monitor for approval on each project. Additional information is provided in the BOE details for the pay item.

BOE Guidance: Specification flag(s) may depend on multiple factors, as described in the BOE details for the pay item group.

Developmental Specification: Developmental Specifications must be requested from the District Specifications Office, for approval by the Central Office (CO) Specifications Office, on a project-by-project basis. Follow the instructions on the Specifications Office's developmental specifications page at

https://www.fdot.gov/programmanagement/OtherFDOTLinks/Developmental/Default.sht m

Estimates Use Only: These items are intended for estimating/accounting use. For additional information, see BOE guidance for the pay item number.

Generic Item: See Chapter 6 for details

Technical Special Provision (TSP): Specification preparation assistance is available at https://www.fdot.gov/programmanagement/PackagePreparation/Default.shtm While TSPs are project specific, coordinate with the District Specifications Office, as past specifications may be available.

Maintenance Use Only: Selected pay items are available for use on Maintenance Contracts only, due to maintenance specification changes that provide for separate payment and/or method of measurement.

Plan Details: While all pay items have selected plan details showing the quantities, locations, and/or dimensions, this flag is used to identify pay items with additional information required, per the Specifications.

Permit: Pay item is used for work required by a permit, normally issued by an environmental or water management agency. These pay items should NOT be used unless addressed in the permit.

Modified Special Provision: Modified specifications must be coordinated with the District Specifications Office. Additional guidance is available at https://www.fdot.gov/programmanagement/PackagePreparation/Default.shtm

Refer to the details for the specific pay item group in the Basis of Estimates DQE Pay Item Database for additional information.

Chapter 3

PROJECT AND PROPOSAL COST ESTIMATES

3.1 General

The department is required to develop and review Construction Cost Estimates for all projects, within the Work Program. Both during early project planning stages and while the project is being designed, the scope must be maintained so that cost estimates correctly reflect the anticipated work. This chapter will address estimate requirements at each project phase, as well as periodic updates that may be required.

3.2 Initial Work Program and Scope Estimates

The Initial Work Program and Scope Estimates are often completed by the Department, prior to a Consultant Design Contract being issued. These estimates are normally entered into the **Long Range Estimates (LRE)** system, based on available scope information and historical prices.

The purpose of these estimates is to determine a budget amount for the Work Program. For additional information, see procedures 600-010-005, Development & Review of the 5 Year Work Program Construction Cost Estimates, and 600-010-001, Preparation of the Authorization/Official Construction Cost Estimate & Contract Bid Review Package, available in the Procedural Document Library.

3.3 Project Design Estimates

3.3.1 Phase I Estimate

Update the estimate to reflect any scope changes. **FDM 901** identifies preliminary information that should be available at this phase. Verify that the following items are correctly reflected in the Phase I Estimate:

Typical Section(s)

Right of Way widths

Bridge and Bridge Culvert lengths and widths

Curb and/or Sidewalk preliminary lengths

Drainage needs, including open/closed system or retention ponds Other components, including Signalization, Lighting, Landscaping

While specific pay items and quantities may not be known at this phase, it is important that the estimate identify all anticipated work/scope.

3.3.2 Phase II Estimate

Update the estimate to reflect any scope changes. **FDM 901** identifies preliminary design information that should be available at this phase. Verify that the following items are correctly reflected in the Phase II Estimate:

Typical Section(s)
Right of Way widths

Bridge and Bridge Culvert lengths and widths

Curb and/or Sidewalk preliminary lengths

Drainage Structures and Pipe Sizes

Retention Pond Size

Other components, including Signalization, Lighting, Landscaping

In addition to updating scope information for the Phase II Estimate, the *FDM* requires that pay items be loaded into the Designer Interface. This will help to identify specification and pay item needs that must be addressed before the Phase III submittal. Coordinate with the District Specifications Office and the District Estimates Office for any non-standard specification or pay item needs. See the *Specifications Handbook* for additional specification guidance. See *BOE Chapter 6* for requesting pay items.

The District Estimator will update/review the Department's Phase II Cost Estimate using any combination of LRE, DQE, AASHTOWARE PrP, Phase II plans, and other scope documentation.

3.3.3 Phase III Estimates

FDM 901 requires that all pay items and quantities should be "complete, but subject to change". Verify that all items are correctly reflected in Estimated Quantities Report. Update pay items and quantities through the Designer Interface.

Notify the District Specifications Office and District Estimates Office of any pending non-standard specifications or pay items, so that the cost estimates can reflect all anticipated work. The District Estimator may request the Designer/Engineer's cost estimate on certain pay items, especially Lump Sum pay items and those with non-standard specifications or pay items.

The District Estimator will update the Department's Phase III Cost Estimate, based on the pay items and quantities loaded through the Designer Interface. The project, details, proposed work items, materials needs, and applicable specifications will be considered by the District Estimator as well as specifics of the unique project activities and non-typical work site conditions and considerations.

3.3.4 Phase IV Estimates

FDM 901 calls for Work Zone Traffic Control pay items to be updated based on the

established construction duration. Update all remaining pay items, including any changes due to non-standard specifications or pay items. Finalize the Estimated Quantities Report. Update the quantities through the Designer Interface.

The District Estimator will update the Department's Phase IV Cost Estimate, based on the pay items and quantities loaded through the Designer Interface. The project details, work items, material needs, and applicable specifications will be considered by the District Estimator as well as specifics of the unique project activities and non-typical work site conditions and considerations.

3.3.5 PS&E Phase Estimates [Plans, Specifications, and Estimate (PS&E) Submittal Phase for Advertisement]

Per the **FDM 901**, "after corrections noted during the Phase IV submittal review are completed and verified, the plans are referred to as Final Plans." Projects with outstanding specifications or pay item issues are not ready to begin the PS&E phase.

The District Estimator will begin preparation of the Department's Authorization Estimate inclusive of all projects on the proposal/contract. Proposal and Project details, work items, material needs, and applicable specifications will be considered by the District Estimator as well as specifics of the unique project activities and non-typical work site conditions and considerations.

Additional guidance on the cost estimates during this phase is available in *procedure* 600-010-001, *Preparation of the Authorization/Official Construction Cost Estimate* & Contract Bid Review Pkg

3.4 Revisions and Addenda

Coordinate with the District Estimator to update the Authorization Estimate. The District Estimator will update the Official Estimate for all design updates processed as revisions or addenda. Provide an updated EQ Report that accurately reflects all design updates and update the PrP final design pay items and quantities as directed by the Project Manager or the District Estimator.

3.5 Estimating Systems for Designers

Long Range Estimates (LRE):

https://fdotwp1.dot.state.fl.us/LongRangeEstimating/default.asp

This application contains the project scope and the construction cost estimate. The districts may provide access to designers in accordance with their defined processes for project development and estimating needs.

Webgate and Designer Interface:


https://fdotwp1.dot.state.fl.us/WTWEBGATEREPORTS/WebGate.aspx.

This interface is utilized by the designer to populate project pay items and quantities into AASHTOWare Project Preconstruction (PrP). The completed advertisement documentation is generated from the project and proposal data contained within PrP.

Design Quantities & Estimates (DQE):

https://fdotewp1.dot.state.fl.us/designquantitiesandestimates

The **Basis of Estimates: Pay Item Reference Data** and the **Master Pay Item** list are available to view/print on the DQE public pages. From the home page, select the Basis of Estimates or Master Pay Item link from the dark blue border at the top of the page; do NOT enter a user ID/password.

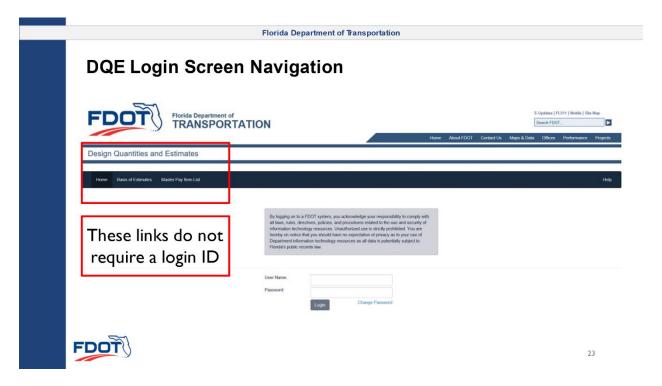

Chapter 4

PAY ITEMS FOR ALTERNATIVE CONTRACTS

4.1 General

When alternative contracting methods are used, factors need to be considered which are different from that of the traditional Design-Bid-Build contracting considerations. This chapter covers some of the factors for varies FDOT alternative contacting methods. Additional instructions may be found in the Construction Project Administration Manual (CPAM).

Designers should work with the District Specifications Office and the Estimates Office to validate that the appropriate specifications and pay items are incorporated into the Alternative Contract.

4.2 Lump Sum Projects and Proposals

Lump sum contracting involves the contractor providing the Department with a lump sum price to complete a project, as opposed to bidding on individual pay items and quantities. The contractor is provided <u>with</u> a set of bid documents and develops a lump sum bid for all work for the project.

Lump Sum proposals consist of one or more Lump Sum projects. The following is an example of a typical Lump Sum projects' pay items:

Pay Item	Description	Unit	Qty
999-2	Lump Sum Contract, Alternative Bidding (123456-1-52-01)	LS	1
999-25	Initial Contingency Amount, Do Not Bid (123456-1-52-01)	LS	1

Supplemental descriptions for each lump sum pay item are necessary to distinguish between projects when more than one project is in a proposal.

Completed Summary Tables, in accordance with Chapter 8, are required for lump sum projects. Designers enter Pay Items in a project with the same project number (Duplicate Project) with the letters "LS" appended to the end of the project number, and a duplicate proposal is also created with the letters "LS" appended to the end of the proposal number. The "duplicate LS" project(s) and proposal contain the detail needed for estimating purposes.

Estimators will prepare a detailed estimate for the "duplicate LS" projects and proposal and enter the total amounts in the "for bid" projects and proposal documentation used for

advertisement of the entire lump sum scope of the proposed work.

4.3 Design-Build Projects and Proposals

Design-Build is a special type of lump sum project and proposal which combines the design and construction phases of one or more projects into a single proposal.

Design-Build proposals consist of one or more Design-Build projects. The following is an example of a typical Design-Build proposals' pay items:

Pay Item	Description	Unit	Qty
50-4	Design / Build, Bridge Construction (123456-1-52-01)	LS	1
50-4	Design / Build, Bridge Construction (123456-1-52-01)	LS	1
50-4	Design / Build, Bridge Construction (123456-2-52-01)	LS	1
999-16	Partnering, Do Not Bid (123456-1-52-01)	LS	1
999-20-1	Disputes Review Board, Meeting-Do Not Bid	DA	55
999-20-2	Disputes Review Board, Hearing-Do Not Bid	EA	2
999-25	Initial Contingency Amount, Do Not Bid (123456-1-52-01)	LS	1
999-25	Initial Contingency Amount, Do Not Bid (123456-2-52-01)	LS	1

Supplemental Descriptions for each lump sum pay item are necessary to distinguish between projects when more than one project is included in a proposal. See additional guidance in Chapter 9.

Design-Build projects and proposals may be estimated in either LRE or DQE. Estimators will prepare a detailed estimate for the duplicate "DB" projects and proposal and enter the total amounts in the projects and proposal used for bidding purposes.

An estimate for the design portion of the work is included in the LRE and DQE estimate total to account for the design fees for each Design-Build project.

Even though Design-Build proposals follow a different procurement process than traditional Design-Build proposals, every Design-Build project and proposal has an Authorization Estimate and Official Estimate estimated in DQE by the Estimator.

4.4 Push-Button/Work Document Projects and Proposals

Push-button projects and proposals are used to expeditiously resolve state roadway deficiencies at various locations concerning signalization, signing, pavement, pavement markings and other miscellaneous roadway deficiencies for a pre-determined contract term. Push-button proposals are commonly referred to as either Indefinite Delivery/Indefinite Quantity, Task Work Order, or Work Document proposals. This contracting process establishes a varied possible scope of work to be completed by the

Contractor based on Department need. The bids received by the Department establish the unit cost prices for the predetermined work items (pay items) included in the bidding documents. Any of the included work elements may be completed by the Contractor pursuant to the Department's issuance of Work Documents containing the scope and tasks for completion. The original scope of work as defined by the estimated quantity for each pay item is approximate. Each Work Document will identify the location, description and what work is to be performed. Under Push-Button contracting, the Department does not guarantee any maximum quantity or minimum quantity of the actual work to be performed.

Refer to Chapter 2 for guidance on including work typically handled via Lump Sum pay items and the appropriate detailed units of measure to cover the work as it is to be called for in the Work Documents. Refer to Chapter 7 for additional guidance on documentation.

Designers will enter pay items through the Designer Interface into the proper Design Groups.

Estimators will prepare an Authorization and Official Estimate in DQE, in accordance with current procedures.

Lump Sum compensation for Maintenance of Traffic and Mobilization are not to be accounted for in separate pay items and must be distributed among other items of work.

4.5 A + B Projects and Proposals

Cost-plus-time bidding or A + B bidding, where A is the standard construction cost and B is the time bid, is designed to shorten the total contract time by allowing each contractor to bid the number of days to construct the project.

The Department determines the contract time duration, and the order of the bidders is adjusted by applying a cost per day dollar amount times the duration (in days) provided by each bidder.

No special pay items are needed for projects on an A + B proposal.

No special actions are needed for A + B project and proposal estimating tasks, however, the Estimator is responsible to enter the cost per day on the Site Record within PrP that will be used when determining the order of bidders based on their monetary bid (A-portion) and time bid (B-portion).

Chapter 5 CONTACT LISTS

This information is now available on the website. https://www.fdot.gov/programmanagement/staff.shtm

Contact Lists 5-1

Chapter 6

PAY ITEM SELECTION AND REQUESTS

6.1 General

Pay items are available for use on projects to identify and quantify the proposed work, and shall be chosen based on the FDOT Standard Specifications that apply to the work to be performed. Pay items also exist for non-standard work. When specifications or standards are not available for the proposed work, the designer must provide the appropriate information and documentation to describe the work. The FDOT Specification Handbook explains the process related to handling and including non-standard work.

Non-standard pay items may be requested when work is not covered by the FDOT Standard Specifications. A complete request will provide the information needed to complete all fields for the pay item's format. Incomplete requests must be addressed prior to implementation of the pay item(s).

To aid the designer in following the required processes for pay item usage, the following three options apply to how pay items are categorized for use:

- (A) Standard (has specifications and applicable standards). Most available options within the pay item template/structure are active. These are the "regular" items that are generally available and used commonly.
- (B) Non-Standard (no specifications or standards, or missing specifications or standards). Known needs and options are active; District shall manage usage, CO will provide Quality Assurance for proper and allowed usage. These are the items that previously would have been considered "project specific," requiring further approvals/coordination.
- (C) Non-Standard on a Controlled Basis (rarely needed or controlled usage requirements that are evaluated each time the pay item is to be included). CO will activate these pay items for use based on District concurrence. These items will be treated like the older "project specific," requiring CO approval before being opened.

NOTE: (B) or (C) apply to Developmental Pay Items as well; Developmental Specifications are not considered part of the Department's adopted standards.

For some pay items, approval must be obtained to include the planned work on the project. Refer to Chapter 2 for definitions of the flags placed on the pay item details that denote additional considerations and applicable required documentation; a flag designation is shown for required approvals.

6.2 Pay Item Request Process

When the required pay item is not available for use, the designer shall work with District staff to process the request to create and activate the needed pay item(s). Coordinate this effort with the District Specifications Office or designee; this office will request the pay item(s) from Estimates Staff within the State Program Management Office.

For Developmental Specification pay items, an automated request is sent to the State Estimates Office at the time the State Specifications Office approves use of the Developmental Specification. No additional request is needed.

6.2.1 Pay Item Selection

The following considerations are provided as an overview of what information will impact the pay item selection and processing effort:

- 1. Do Standard Specifications or Standard Plans exist for the proposed work?
- 2. Does the proposed work differ in any way from the applicable Standard Specifications or Standard Plans?
- 3. Do the Standard Specifications and Standard Plans cover all of the needed information to describe the proposed work?
- 4. For pay item requests for work not covered by Standard Specifications and Plans, what will be provided to document the requirements for completing the work?

6.2.2 Submitting the Pay Item Request Timely

As a general rule, all pay item requests are to be submitted for inclusion in the Phase II submittal. It is important to identify all portions of the proposed work that are non-standard as early as possible as these requests take longer to process. The State Estimates Office has activated commonly used non-standard items for inclusion on projects. If the non-standard pay item is already available for use, the designer will ensure as early as possible all required and applicable documentation is included on the project.

Pay items may be requested for inclusion on projects being developed within LRE. These requests will typically be for standard use pay items that are not already available on the Component of Work X-Item drop down list within the application. These requests may be sent directly to the State Estimates Office at the following email recipient group - FDOT-PayItems@dot.state.fl.us. Within LRE, an X-Item should be used instead of an EX-Item whenever possible. EX-Items are user defined and are not able to be included in data searches.

The pay items selected and placed on projects, both within LRE and PrP, are used for planning purposes for future needs for both materials and budget. The earlier the detailed pay item information is available for the work on the proposed project the more beneficial it is to those using this data for decision making purposes.

6.2.3 Steps for Requesting a Pay Item

- 1. Select the appropriate Standard Specification covering the work (if available)
- 2. Determine if there is an existing Specification Section that the proposed work most closely aligns
- 3. Identify the pay item number configuration needed; refer to the Pay Item Structures (Templates) within DQE to view the available options for the pay item designations (for assigned and available variables)
- 4. Send the requested pay item number to the District Specifications Office or designee for processing; be sure to include the project number, letting date, and what project information will be developed to cover any non-standard work as this information will facilitate efficient processing of the request

Required approvals may be obtained after the new pay item is activated for use and placed on the project. The designer should acknowledge in the request that the approval is pending and should provide the summary of the request for approval. This will assist the individual processing the pay item request with understanding how the item will be used on the project.

The District Estimates Office should also be provided with the details of the pay item request to assist with pricing the proposed work. This information is retained as part of the project estimate file for use and reference by all estimators in the district and maintained for future review of the project by the State Estimates Office on an as requested basis.

6.2.4 Other Considerations for Selecting and Requesting a Pay Item

- Has the FDM guidance been followed for design decisions?
- Are other FDOT handbooks or manuals applicable, such as the FDOT Design Manual (FDM), Traffic Engineering Manual (TEM), Construction Project Administration Manual (CPAM)?
- Are other external handbooks or test methods applicable, such as the Manual for Uniform Traffic Control Devices (MUTCD), American Society for Testing and Materials (ASTM), or Federal Highway Administration (FHWA)?

The responsible office will work together with the above groups when a significant change is proposed, to reduce the potential "unintended consequences". The affected offices will coordinate the implementation date, as needed.

Pay Item Structure (Group level for Pay Item Numbers):

Pay item structure numbers will be assigned by the Basis of Estimates Coordinator in the

Central Office. Specification Section numbers will be selected with recommendations from the State Specifications Office. See additional guidance in **Chapter 2** for Formatting Pay Items.

Guidelines for new pay item structures 0123-456-789:

- See Chapter 2 for first digit (0) details.
- Next three digits (123) match the Specification Section. See also Developmental Pay Items and/or Generic items for special cases.
- Digits 456-789 may have nearly any combination of variable "slots" used, but are always right justified within the group.
- Variables ABC-DEF are shown in the "slots" of digits 456-789 when describing
 the template/structure-level; likewise, they represent multiple combinations
 depending upon variable needs. These variables are used to define operation,
 size, shape, color, type, etc. (when needed) to separate items with significantly
 different cost. Variables that can be defined in the plans or specifications
 do not need separate pay items if the cost is similar. Contact the Basis of
 Estimates Coordinator for assistance.
- When install, relocate, or other non-furnish operations are defined, the remaining variables may be blank or zero. These should be clearly indicated with the structure.

6.3 Generic Pay Items for Utility Work

6.3.1 Description

At this time, generic pay items are only available for utility work. Generic pay items are general use pay items available for Utility Work that are defined by a pay item supplemental description on a project-by-project basis. They are intended to support one-time usage pay items or specialty situations where a standard pay item is not available, and for which it is not practical to create a new pay item. A single generic pay item number can be used many times, but only once per project/proposal; each time it is used the appropriate descriptive information must be included. Since these items are for unique situations, tracking of cost history for future estimation purposes is not necessary. If cost history might be helpful, consider requesting a new pay item.

Coordinate with the District Estimates Office, as needed, to address contract issues when generic items are used on multiple projects or similar items within a contract.

6.3.2 Rules

The following rules apply in the usage of all **generic pay items**, **including duplicate Lump sum projects**:

- Must not be used if there is an existing pay item.
- Must not be used to violate or circumvent standard pay items. Must not be used to

- circumvent the approval process (for specification usage) on developmental items.
- Must not be used as a standard means to work-around a pay item that has been rejected for statewide usage by Central Office.
- Must not be used for sole-sourcing of materials/methods for items of work.
- Must not be used to circumvent the pay item request process if the pay item should be activated for statewide usage.
- Must be supported by a technical special provision and/or plan details; refer to 7.3 of the Basis of Estimates.
- Must be loaded under the appropriate project category (Utilities=700).

6.3.3 Process

The process that is to be followed when generic pay items are used is as follows:

- 1. District identifies work that is appropriate for a generic pay item but must not violate the rules.
- 2. Designer includes all supporting details for the generic pay item in the contract documents.
- 3. Designer loads generic pay item via the Designer Interface and supplies the District Estimates staff with the pay item supplemental description.
- 4. District Estimates staff loads supplemental description and units for generic pay item.

6.3.4 Quality Control and Quality Assurance

Quality Control: Districts assume all responsibility for proper usage of generic pay items. No approvals from Central Office will be required; no Quality Control reviews will be performed by Central Office.

Quality Assurance: Quarterly post-letting reviews of generic pay items will be performed by the Central Office Project Review team. The team will check for:

- Supplemental Proposal Description (clearly representing the item of work), with unit of measure, has been loaded; and
- Complete documentation (drawings and/or specifications) is included in the contract package.

The responsible Central Office Design personnel may be consulted to verify appropriate usage.

6.3.5 Pay Item Structure and Description

Generic pay items are structured as:

0000-AAA-BBB

AAA = Design Group/ Category (700 for Utilities)

BBB= Sequential Number that can be re-used

Note: Zeros are hard-coded; they are NOT blanks.

The default unit of measure for all generic pay items is ZZ. The actual unit of measure must be entered with the project-specific description being added at the end of the Supplemental Proposal (Pay Item) Description. Example:

```
0000-700- 1 UTILITY DESIGN GROUP - GENERIC PAY ITEM 1 (UTILITY PIPE, F&I, DI/CI, WATER/SEWER, 10" - LF) ZZ
```

Description: The Supplemental Proposal (Pay Item) Description and unit of measure are entered as follows:

By default, the Description field will be filled with the generic description that is associated with the pay item number in the master pay item list; the default unit of measure will be ZZ. While the designer may enter the pay item number and quantity, it is the District Estimates Office's responsibility to enter the Supplemental Proposal Description and actual unit of measure, as shown in parentheses in the example above.

Utility Pay Items: Generic pay items can provide greater flexibility for Utilities projects. They can be used to:

- Specify a pipe size when the standard pay item is for a size range:
- Break out fittings on items that normally have fittings included as an incidental cost of the pipe (pipe size less than 8"):
- Combine fittings into one pay item when the standard pay item does not include the fittings (pipe size greater than or equal to 8").
- Separate payment for unique utility work or materials

6.4 Developmental Pay Items and Special Use Items

6.4.1 Developmental Pay Items

Developmental Pay Items are used with Developmental Specifications. See the **Specifications Handbook** for additional information.

When an item is recommended for implementation while details are under review (specifications, standards, policy, etc.) a developmental pay item template may be established. Developmental items are intended for limited use, for a limited period of time, while the items are under review. A monitor is assigned for each Developmental Specification. Any problems or concerns with the Developmental Specification, from either Design or Construction, should be directed to the monitor (see respective items for

monitor details).

Per the Developmental Specifications instruction, requests for project specific approval of the Developmental Specification must be through the District Specification Office, for approval by the CO Specifications Office. Non-standard or project specific pay item numbers are available/assigned through an FDOT internal established process upon approval of the specification. This pay item will be delivered to the district for further dissemination.

Upon completion of the review period for the specification, standard, and/or policy change(s), the monitor may recommend that a specification and associated pay item(s) be activated for statewide implementation.

6.4.2 Special Use Pay Items

Special Use pay items are generally used to encumber funds. They are numbered similarly to items in 6.4.1. Details for most of these pay items are found in the *Construction Project Administration Manual (CPAM)*. Examples of Special Use Pay items include Lump Sum Contract, Partnering, Disputes Review Board, Speed and Law Enforcement, and Initial Contingency Amount. Note that some of the special use pay items are marked "DO NOT BID" and/or contain pre-set prices.

PAY ITEM DOCUMENTATION

7.1 General

To assist the designer with proper pay item selection and usage, Chapter 2 provides a list of Specification Type Flags (Spec Type codes). All pay items intended to cover Non-Standard work are assigned a Spec Type code (flag). When the code "A" is assigned for "Approvals Needed", additional deliverables are needed to document the Non-Standard work even though an additional code is not designated.

7.2 Non-Standard Work Included in Projects

The following information describes the different ways of denoting non-standard work and the requirements for proper inclusion in the project documentation.

Detailed plan notes, modified special provisions, and/or technical special provisions must be provided by the designer for all pay items not covered by existing specifications. Plan notes are not acceptable as a substitute for specifications. Plan notes are intended to work *with* the specifications, and are not intended to supersede the specifications. Plan notes must not:

Change the specifications

Conflict with the specifications

Duplicate the specifications

Change the pay item description

When existing specifications are not applicable, coordinate specification revisions with the District Specifications Office. Every effort should be made to avoid conflicts, as plan notes are overridden by some specifications but take precedence over others. In either case, plan notes must <u>never</u> conflict with specifications. Details necessary for complete information include:

Description of item
Materials
Construction and installation
Method of measurement
Basis of payment

Modified Special Provisions are also known as "MSPs". Technical Special Provisions are also known as "Tech Specs" or "TSPs". In general, the difference is:

- MSPs: used to modify existing specification sections
- TSPs: used when no specification section exists

For additional information on various types of specifications, refer to the **Specifications**

Handbook at http://www.fdot.gov/programmanagement/specs.shtm. Contact the District Specifications Office with any project related specifications concerns.

NOTE: Refer to the FDOT Design Manual (FDM [Procedure 625-000-002]), for additional guidelines on using plan notes. It is located online at http://www.fdot.gov/roadway/FDM. Contact the Roadway Design Office with any questions, comments, or corrections regarding these notes. Similar guidance is in the Structures Detailing Manual, Volume 2 - Chapter 5. The manual is located online at https://www.fdot.gov/structures/StructuresManual/CurrentRelease/StructuresManual.sht

7.3 Choosing Between Specifications and Plan Details

When trying to decide between Specifications and Plan Details, there are several quick questions to consider:

- 1. What is the work to be completed?
- 2. What are the material requirements? What are the testing criteria?
- 3. How is this to be installed? What are the performance requirements?
- 4. Will the item be measured in the field, or paid by plan quantity?
- 5. What work/materials are included with, or excluded from, this payment?

When is a Plan Note sufficient? When all of the questions above are answered by the specifications, a plan note is usually sufficient. This frequently occurs when the specification indicates "use xxx, unless otherwise shown in the plans." Remember, plan details/drawings show dimensions and location; they alone are not a substitute for complete specifications.

Note: Pay item notes that begin "Payment includes..." should be moved to the appropriate specification's Basis of Payment. Do not use a pay item note to change or duplicate the specification, without approval of the District Specifications Engineer.

When is a Specification Required? If the above questions are *not* answered by the existing specifications, a non-standard specification is required. The Designer is responsible for ensuring that all pay items are completely covered within the contract documents (specs, standards, and/or plans).

A complete specification includes:

Description: A Description of the work to be completed may be in the form of a drawing/plan detail, words in a specification, or both.

Material requirements: Materials may be identified in the specifications, design standards, by reference to ASTM or other testing criteria, or by notes in the plans. Consider long-term material requirements, such as UV protection or other coatings.

Construction: Either installation methods or performance requirements may be given. Some products may be installed "in accordance with manufacturer's instructions."

Method of Measurement: Describe HOW the item will be measured, as well as whether it will be paid by plan quantity or field measured. The standard text normally includes the "furnish and install" operation. When working with "install only" items,

ensure that the pick-up/delivery instructions are included. For "relocate" items, clearly identify original and final location, as well as clean-up work at the original location and incidental items needed at the final location. "Remove" items should clearly identify whether contractor takes ownership (dispose), or the Department retains ownership (stockpiled within right of way or delivered to maintenance yard). Additional operations are explained in the **Chapter 2**.

Basis of Payment: Payment is often "full compensation for all work specified" for a complete and accepted installation.

Special/Custom items should only be used when there is a significant deviation from the standard item of work; existing specifications and/or standards do not apply. Complete specifications are needed.

Note: Minor changes may be noted in the plans, using standard pay items, as long as conflicts are not created within the contract documents. Coordinate proposed specification changes with the District Specifications Office.

7.4 Choosing between Plan Details, Pay Item Notes, and Summary Table Design Notes Column

The Design Notes column of the summary table is used to show information that is location and/or payment specific. Do not use the design notes column for specification details, such as material requirements. Refer to Chapter 8 for additional guidance.

Plans or Pay Item notes should be coordinated with the District Specifications and Estimates Offices. They should not be used in conflict with specification text for Measurement and Payment. Refer to the *FDOT Design Manual (FDM)* for additional guidance.

7.5 Federal Participation at the Pay Item Level

On a project with federal funds, all items will "participate" in the funding, unless specifically noted otherwise. Summarized from FHWA requirements, all items of work, including preventative maintenance, which are intended to extend the useful life of the highway will be eligible for participation in federal funds.

Items of "routine maintenance" are not eligible for participation in federal funds. Examples of "routine maintenance" include litter removal and mowing.

For construction contracts, most items will be loaded as participating. Pay Items specifically noted in the **BOE Pay Item Database** (accessible within DQE) as "non-participating" will default to "non-participating". Do not change the participating/non-participating field, unless specifically instructed by the District Estimates Office.

EQ REPORT AND SUMMARY TABLES

8.1 Introduction

8.1.1 History

Beginning with the 2021 FDM, FDOT started the process of phasing out Summary Boxes as part of project plan phased submittals. As a replacement, projects beginning design in 2021 began to utilize an Estimated Quantities Report (EQ Report) containing Summary Tables to serve contract quantity requirements needs. EQ Report will be required for project submittal starting at Phase II (at request of the district) and/or Phase III and subsequent submittals. See FDM 901 and 902 for more information.

Unlike summary boxes, which reside at the end of the lead discipline plan PDF file on the Summary of Quantities Sheets, the EQ report is a separate PDF file from the Plans PDF. The EQ report has a signature sheet that needs to be signed and sealed per FDM 902 requirements and CADD workflow as referenced within.

The Summary Tables within the EQ Report continue to be an integral part of the Plans, Specifications, and Estimates Contract Package. Summary Tables are to be automated by CADD Quantity Takeoff Manager (QTM) tool. Some of the tables' contents may be auto populated by the QTM with the quantity data from design files within the CADD modeling software (Such as ORD, OBM or C3D); some of them will need to be completed by the Designers manually. See FDM 902, CADD manual 8.4.3 and FDOT Automated Quantity Training Guides for Summary Table requirements.

It is the Designer's responsibility to ensure that quantities provided, automated or manually done, are accurate and conform to design intent. Once Summary Tables are all generated, use Summary Report Builder to create the EQ Report PDF file for submittals. See FDM 902 and FDOT Automated Quantity Training Guides for details.

FDM 902 also clarifies the format of the EQ report for a strung project and projects presented in the same set of plans.

For projects beginning design using Summary Boxes, see BOE 2021 and FDM 2020 and contact Estimates Office for support if needed.

Contact CADD.support@ dot.state.fl.us for CADD support issues. Contact FDOT-Payitems@dot.state.fl.us for Estimates support issues.

8.1.2 Estimated Quantities Report

Pay item quantities will be documented in the contract documents via the EQ Report using Summary Tables. The Summary Tables identify the pay item number, pay item description, unit of measure, quantities, location (station to station), and design notes to the contractor.

8.1.3 General Requirements

Use Summary Tables to document all pay items. The quantity of each item by location is required. Each quantity must be calculated with one additional significant decimal place, totaled, and then rounded to the defined precision for each pay item, per Chapter 2. Pay items with automated quantities shall meet the precision requirements. The CADD Office is continuously in the process of developing quantity automation features; it is recommended to stay updated with the progress as new features are added.

If station equations exist in the alignment, the region numbers are required for the station locations.

Do not include contingency quantities. Due to state and federal regulations, bid quantities must reflect actual work to be completed. Unforeseen work will be addressed in accordance with the Specifications. Quantity overruns, measurement, and payment are addressed in Section 9 of the Standard Specifications. Construction/Final Estimates will adjust Final quantities and/or prices, as applicable, per the Specifications.

Designers must retain back-up. If a question arises involving quantities, Construction will request in writing, that the designer provide detailed documentation or verify the concern of the pay item(s) in question. The designer shall produce the back-up documentation within five working days of the request from Construction.

Do not reformat Summary Tables. See FDOT Automated Quantity Training Guides for additional information about table automation and report creation.

NOTE: Design data tables are not intended for location, quantity, or pay item information; they may be used, as called for in the FDM or Standard Plans. These are used to supplement data calculations or item specific details. Do not use data tables to duplicate or relocate information from a Summary Table. As the Department moves towards model centric design, the Summary Tables may include more supporting data, currently placed in plan sheet notes and tables.

8.2 Summary Table Format

See FDOTConnect Automated Quantity Training for Summary Table format requirements for table automation. Points to note:

Don't mix Summary Boxes with Summary Tables in the EQ Report. Use only

Summary Tables.

- Don't use the Construction Remarks column for documenting design quantity needs. They are for Construction As-Builts information.
- See BOE Section 2.2 for quantity precision and rounding information for nonautomated quantities.

8.2.1 Adding and Deleting Columns

All Summary Tables are formatted in a similar manner for automation purpose, with column headings for pay item, location, offset, quantity, etc., as needed. Do not add any additional columns. Rows reflect the individual pay item location(s), as needed. See the *CADD Manual* at https://www.fdot.gov/cadd/downloads/publications/publications.shtm for additional information.

8.2.2 Design Notes Column

When location-specific notes are needed to clarify details or quantities, the design notes column may be used. Refer to the **FDM** for additional information on plan/project pay item related notes.

8.3 Order of Summary Tables in the EQ Report

8.3.1 Plan Sets with Roadway Plans, with or without additional components

Summary Tables for the Project, including components will be included in the EQ Report. The table order is automated; Follow Chapter 3 and *FDM 902* guidance for submitting the report. For Summary Tables examples, refer to the Estimates Office webpage.

#	Summary Table Title
	(select title to go to Instructions)
1	Summary of General Items
2	Summary of Lump Sum Items
3	Summary of Temporary Traffic Control Plan Items
4	Summary of Special Detours
5	Summary of Temporary Highway Lighting
6	Summary of Temporary Driveways
7	Summary of Pedestrian Longitudinal Channelizing Devices
8	Summary of Temporary Crash Cushions
9	Summary of Temporary Signalization & Detection
10	Summary of Erosion and Sediment Control Devices

11	Summary of Litter Removal and Mowing
12	Summary of Monitor Existing Structures – N/A
13	Summary of Clearing Grubbing and Removal Items
14	Summary of Mailboxes
15	Summary of Earthwork
16	Summary of Geotechnical Items
17	Summary of Driveway Base
18	Summary of Pavement
19	Summary of Miscellaneous Asphalt
20	Summary of Box Culverts
21	Summary of Drainage
22	Summary of Utility Adjustments
23	Summary of Miscellaneous Drainage Items
24	Summary of Railing
25	Summary of Curbs
26	Summary of Permanent Barriers
27	Summary of Permanent Driveways
28	Summary of Sidewalk & Detectable Warnings
29	Summary of Ditch Pavement
30	Summary of Walls
31	Summary of Guardrail
32	Summary of Permanent Crash Cushions
33	Summary of Fencing
34	Summary of Performance Turf
35	Summary of Traffic Monitoring Site Items
36	Summary of Utility Items
37	Summary of Structure Quantities
38	Summary of Landscape Items
39	Summary of Signalization Items
40	Summary of Intelligent Transportation System Items
41	Summary of Signing and Pavement Marking
42	Summary of Lighting Items

8.3.2 Plans with Multiple Projects

For multiple projects let under one contract: An EQ Report is completed for each 11-digit FPID number, 123456-1-52-01.

For multiple project FPID numbers with one set of plans (incidental work for secondary project is shown in primary project's plans): Only one *EQ Report* is completed for all FPID numbers if all of the design is shown in the same set of plans. The plans sheet(s) MUST clearly identify work to be covered by the secondary projects. This will ensure that the final quantities are recorded on the appropriate Summary

Table. A different *Summary Table* will need to be created for each separate sequence, or FPID number (each Summary Table's name is expanded to include the FPID number to distinguish them from one another).

8.4 Summary Tables and Instructions

The latest versions of the Summary Tables shown below are available within the FDOT CADD software, for use with the automated quantities tools.

1. Summary of General Items

000: DA, Architectural, Mass Transit, other Return to Summary Table List

This table is intended for use with Per Day items, Architectural Items, Mass Transit Items (if not included on a component plan Tabulation Sheet), and other incidental items with no specified table.

Do not use this table for 999-102- Speed and Law Enforcement Officer; this pay item is for use by the Construction Engineer, not the Contractor, and is not shown in a Summary Table.

				Summ	ary of Genera	l Items						
Pay Item		Units of	Qua	ntity	Total G	uantity		Loc	ation			
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Design Notes	Construction Remarks

2. Summary of Lump Sum Items

000: Lump Sum; includes 108: Monitor Existing Structures Return to Summary Table List

This table is intended for use with Lump Sum pay items. For items with secondary units, quantify by location, per Chapter 2.

This Summary Table is NOT intended for use with pay item 999-2 Lump Sum Contract. Refer to 8.7 for summarizing quantities on Lump Sum Projects/Contracts.

This table is not for MOT items, such as Special Detour or Maintenance of Traffic-LS; use the Summary of Temporary Traffic Control Plan Items for MOT-LS.

This table is not for Clearing and Grubbing; use the Summary of Clearing and Grubbing and Removal Items.

For any Lump Sum pay item with a secondary unit, ensure that the secondary quantity is clearly defined, by location or Element ID. For example, a LS/SF Item must be quantified by square foot, for each location.

For Lump Sum pay items with a LS secondary unit, the work and materials must be clearly identified by location. Detail the quantities of all items of work, to provide the contractor with sufficient information to bid the total work. As with all pay items, do not

include non-quantifiable or contingency items within a Lump Sum item.

This Summary Table is also intended for use with Monitor Existing Structures. See *FDOT Standard Specifications* and *FDM 117* to define the area/limits that should be included for each pay item. Do NOT include structures covered under Article 108-2 of the specifications. This table is intended to identify additional locations that may require monitoring outside the limits defined in the Specifications (108-1). All locations for pay items 108-2 and 108-3 should be included in the Summary Table with a detailed description in the plans. See FDM 117 for details.

For Lump Sum projects with no structures outside of the specification limits, it is possible to have an "empty table", with only the pay item 108-1 column to count the cost estimates. This empty table will serve as notice that monitoring is needed within the specification limits.

Do not include initial contingency or do not bid items on this Summary Table; these pay items are not for the contractor's use.

		Summ	ary of Lump Sun	ltems				
Pay Item	Pay Item Description	Units of	Qua	ntity	Total G	uantity	Design Notes	Construction Remarks
Number	Pay item Description	Measure	P	F	P	F	Design Notes	Constituction Remarks

3. Summary of Temporary Traffic Control Plan Items

102: Traffic Control

Return to Summary Table List

This table is intended for use with most Temporary Traffic Control Plan (TTCP) Items. However, Special Detours, Temporary Driveways, Temporary Crash Cushions, and Temporary Signalization and Detection have separate Summary Tables, and are not included on the Summary of Temporary Traffic Control Plan Items.

Quantities for Each and Each Day items MUST be a whole number.

Information such as total days or number of applications should be added to Design Notes column.

This table is used for temporary pavement markings (paint) and RPMs for TTCP quantities. See the Summary of Signing and Pavement Markings for Painted Pavement Markings, Final Surface (pay item 710-90).

For TTCP Items not based on time or days, the duration column may be blank.

Do not include temporary fencing, sodding, or erosion control devices under MOT lump sum; See the BOE details for 550, 570, and 104 pay items.

				Summary of	of Temporary	Fraffic Control	Plan Items					
Pay I	tom		Units of	Number	Duration	Qua	ntity	Total Q	uantity	Location		
Num		Pay Item Description	Measure	Required	(Days)		E	ь	E	Const.	Design Notes	Construction Remarks
					(,-,	-	'	r		Phase		

4. Summary of Special Detours

102: Traffic Control

Return to Summary Table List

This table is intended for use with Pedestrian and Vehicular Special Detours. DO NOT include these pay items on the Summary of Temporary Traffic Control Plan Items.

Locations for each Special Detour MUST be shown in the plans. Secondary units for all locations must be shown.

				Sum	mary of	Special D	etours									
Pay Item	Units of		Qua	ntity	Total G	uantity	Seco	ndary Qu	antity		Local	tion				Construction
Number	Measure	Width (FT)	Р	F	Р	F	Units	Р	F	Const. Phase	Begin Station		Side	Element ID	Design Notes	Remarks

5. Summary of Temporary Highway Lighting

102: Traffic Control

Return to Summary Table List

This table is intended for use with Temporary Highway Lighting, in accordance with the BOE details. DO NOT include these pay items on the Summary of Temporary Traffic Control Plan Items.

Locations MUST be shown in the plans. This is a Lump Sum/Each item; secondary units for all locations, by phase, must be shown.

					Summary	of Tempor	ary Highw	ay Lightin	9							
Pay Item	Units of	Qua	intity	Total G	uantity	Seco	ndary Qua	entity			Loca	tion				Construction
Number	Measure	Р	I F	P	F	Units	Р	F	Const. Phase	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Remarks

6. Summary of Temporary Driveways

102: MOT- Temporary Driveways Return to Summary Table List

This table is intended to summarize the locations for Temporary Driveways, and quantity needed for Commercial Material. DO NOT include this pay item on the Summary of Temporary Traffic Control Plan Items.

			5	Summary of	Temporar	y Drivewa	ys								
Pay Iten	Units of		Width (FT) Thickness			ntity	Total C	uantity		- 1	Location				Construction
Number	Measure	Length (FT)	Width (FT)	(IN)	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Remarks

7. Summary of Pedestrian Longitudinal Channelizing Devices

102: Traffic Control

Return to Summary Table List

This table is intended for use with Pedestrian Longitudinal Channelings Devices, in accordance with the FDM.

Do not include these pay items on the Summary of Temporary Traffic Control Plan Items. Locations MUST be shown in the plans, per the FDM.

			9	Summary of	Temporar	y Drivewa	ys								
Pay Item	Units of			Width (FT) Thickness		ntity	Total G	uantity		- 1	Location				Construction
Number	Measure	Length (FT)	Width (FT)	(IN)	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Remarks

8. Summary of Temporary Crash Cushions

102: Temporary Crash Cushions Return to Summary Table List

This table is intended for use with Temporary Crash Cushions. Details must be provided for each location. Do not include this pay item on the Summary of Temporary Traffic Control Plan Items.

				Summa	ry of Tem	porary Ci	rash Cust	nions								
				Length	Width	Qua	ntity	Total G	uantity			Locat	tion			
Pay Item Number	Units of Measure	Work Zone Speed (MPH)	Test Level (TL-2 or TL-3)	t Level (TL-2	of Hazard (IN)	Р	F	Р	F	Const. Phase	Alignment	Begin Station	End Station	Element ID	Design Notes	Construction Remarks

9. Summary of Temporary Signalization and Detection

102: Traffic Control

Return to Summary Table List

This table is intended for use with Temporary Signalization, as well as maintenance of Existing Signalization. Do not include these pay items on the Summary of Temporary Traffic Control Plan Items.

The Design Notes column may be used to identify the intersections by street names/numbers, as needed.

			Summ	ary of Tempo	orary Signaliz	ation and Det	ection					
			Existing (E)			Qua	ntity	Total Q	uantity	Location		
Pay Item Number	Pay Item Description	Units of Measure	or Temp/New (T)	np/New Required (Days) P F P F Const.		Design Notes	Construction Remarks					

10. Summary of Erosion Control and Sediment Control Devices

104: Erosion Control

Return to Summary Table List

This table is intended for use with Erosion and Sediment Control Devices. Summarize quantities by location.

			Sum	mary of Eros	ion Control	and Sedimer	t Control De	vices					
Pay Item		Units of	Qua	ntity	Total G	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

11. Summary of Litter Removal and Mowing

107: Litter Removal and Mowing Return to Summary Table List

This table is intended for use with Litter Removal and Mowing. The Specification defines the area/limits that should be included for each pay item.

						Summary	of Litter F	Removal a	nd Mowi	ng								
Pay Item	Unite of	Duration	Frequency	Longth	Midth			Quantity		Total G	uantity		Local	tion				Construction
Number	Measure		(Days)	(FT)	(FT)	Cycles	ACI Cycle	Р	F	Р	F	Const. Phase	Begin Station		Side	Element ID	Design Notes	Remarks

12. Summary of Monitor Existing Structures (No longer applicable – see below)

108: Monitor Existing Structures

Return to Summary Table List

This table has been replaced by Summary of Lump Sum Items per *FDM117*.

13. Summary of Clearing Grubbing and Removal Items

110: Removal Items

Return to Summary Table List

This table is intended for use with roadway items to be removed. For Signalization, Signing, or Lighting, use the appropriate component Summary Tables.

This table may be used to detail items to be included under Clearing and Grubbing, Lump Sum.

If Clearing & Grubbing, Lump Sum, is used, the quantity for secondary units should be shown in the area column under secondary units. The "P" total should remain 1 LS. Total acres may be shown in the Design Notes column.

				s	ummary (of Clearin	g Grubbi	ng and R	emoval Ite	ems								
Pay Item		Units of			Qua	ntity	Total G	uantity	Seco	ndary Qu	antity		ı	ocation				Construction
Number	Pay Item Description	Measure	Length (FT)	Width (FT)	Р	F	Р	F	Units	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Remarks

14. Summary of Mailboxes

110: Mailboxes

Return to Summary Table List

This table is intended for use with mailboxes.

					Summary of	f Mailboxes							
Pay Item		Units of	Qua	ntity	Total C	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

15. Summary of Earthwork

120: Earthwork

Return to Summary Table List

This table is intended for use with earthwork items. See CADD Manual for documentation guidance by alignment.

					Summary o	f Earthwork							
Pay Item		Units of	Qua	ntity	Total C	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

16. Summary of Geotechnical Items

140s and 400s: Geotechnical Return to Summary Table List

This table is intended for use with Geotechnical Items. Design Notes column may be used to refer to Technical Special Provisions, as applicable, to clarify quantities shown on the Summary Table.

				Sur	mmary of Ge	otechnical It	ems						
Pay Item		Units of	Qua	ntity	Total C	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

17. Summary of Driveway Base

286: Summary of Driveway Base- base material Return to Summary Table List

This table is intended for use with Driveway Base. Refer to pay item group and the Specifications for details.

For concrete turnouts/driveways, see the Summary of Permanent Driveways or Summary of Sidewalk & Detectable Warnings.

The asphalt surface course (Superpave) is paid separately under 334-Asphalt. The asphalt quantities may be shown on the Summary of Permanent Driveways or Summary of Pavement.

				S	ummary of I	Driveway Bas	se						
Pay Item		Units of	Qua	ntity	Total C	uantity			Location				
Number	Pay Item Description	Measure	Р	F	P	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

18. Summary of Pavement

160s, 200s, 300s, 520s, and 546s: Pavement, patterned pavement or architectural pavers, rumble strips.

Return to Summary Table List

This table is intended for use with permanent asphalt and concrete pavement, including

patterned/textured pavement. For asphalt driveways, the quantity may be shown on this Summary Table, or the Summary of Permanent Driveways. When driveways are shown on this Summary Table, add "Driveway" to the Design Notes column for each location.

For quantities summarized on the Summary of Permanent Driveways, add a row to this Summary Table to indicate the total from the former table.

When overbuild is used, show overbuild quantities separate from structural quantities. Add "Overbuild" to the Design Notes column for each location. Do not create any other overbuild quantity summary table in the report. See FDM 306 for overbuild details required. Refer to 334- pay item group for additional details.

					Sum	mary of Pav	ement							
Pay Item		Units of	Qua	ntity	Total G	uantity			Loc	ation				
Number	Pay Item Description	Measure	Р	F	P	F	Alignment	Begin Station	End Station	Location Description	Side	Element ID	Design Notes	Construction Remarks

19. Summary of Miscellaneous Asphalt

339: Miscellaneous Asphalt, per TN Return to Summary Table List

This table is intended for use with Miscellaneous Asphalt, including under-guardrail pavement, bicycle paths, and median pavement. Do not use this pay item for Special Detours or other temporary asphalt applications.

				Summary o	f Miscellane	ous Asphalt	t						
Pay Iter	Unite of	Thickness	Qua	intity	Total C	Quantity			Location				
Numbe	Measure	(IN)	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

20. Summary of Box Culverts

400s: Box Culverts, Reinforcing Steel

Return to Summary Table List

This table is used for Box Culverts less than 20'.

Bridge Culverts (20' and greater) use the Summary of Structure, Bridge, with the bridge number in the summary table heading.

					Summary of	Box Culvert	5						
Pay Item		Units of	Qua	ntity	Total Q	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

21. Summary of Drainage

430: Drainage

Return to Summary Table List

This table is intended for use with Side Drain and Mitered End Sections.

This table replaces previous Summary of Trench Drain, Summary of Underdrain, Summary of French Drain, and Summary of Edgedrain boxes. This table may also include total quantities from Summary of Ditch Pavement and Summary of Permanent Turf.

Do not add a column for sod; use the Summary of Performance Turf.

For miscellaneous drainage work, the Summary of Miscellaneous Drainage Items may be used.

					Sum	mary of Dra	inage							
Pay Item			Units of	Qua	ntity	Total G	uantity			Location				
Number	Label	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

22. Summary of Utility Adjustments

425: Manholes & Inlets

Return to Summary Table List

Work being completed under the roadway project (-52 project number) will be shown in the roadway plans on the Summary of Utility Adjustments. This is normally limited to utility adjustment for milling, pay items 425-4, 425-5-A, and 425-6.

Work being completed under the JPA (-56 project) will be shown in the utility component plans with a tabulation sheet. Do not use this Summary Table for utility component plans.

				Sur	nmary of Uti	lity Adjustm	ents						
Pay Item		Units of	Qua	ntity	Total C	Quantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

23. Summary of Miscellaneous Drainage Items

430: Drainage- Miscellaneous items

Return to Summary Table List

This is an optional table; it is intended for use with Miscellaneous Drainage Items or on projects with minimal drainage work, i.e. replacing broken inlet tops or moving structures to accommodate added turn lanes, etc.

				Summar	y of Miscella	neous Drain	age Items						
Pay Item		Units of	Qua	ntity	Total C	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

24. Summary of Railing

460, 515: Railings

Return to Summary Table List

This table is intended for use with Metal Railings.

					Summary	of Railing							
Pay Item		Units of	Qua	ntity	Total C	uantity			Location				
Number	Pay Item Description	Measure	Р	F	P	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

25. Summary of Curbs

520s: Curb & Gutter, Traffic Separator

Return to Summary Table List

This table is intended for use with Curbs: curb and gutter, curb elements, and/or Traffic Separators.

					Summary	of Curbs							
Pay Item		Units of	Qua	ntity	Total G	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

26. Summary of Permanent Barriers

521: Concrete Barrier

Return to Summary Table List

Reviewers: This table is intended for use with Permanent Barriers. Use Summary of Walls for Gravity Walls.

				Sur	nmary of Per	manent Barr	iers						
Pay Item		Unitsof	Qua	ntity	Total Q	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

27. Summary of Permanent Driveways

334 or 522: Permanent Driveways

Return to Summary Table List

This is an optional table and is intended for use with Permanent Driveways.

Permanent Concrete Driveways may be summarized on the Summary of Sidewalk and Detectable Warnings.

Permanent Asphalt Driveways may be summarized on the Summary of Pavement.

Do not duplicate quantities by location on multiple Summary Tables. For quantities summarized on this table, add a row to the Summary of Pavement (Asphalt) or Summary of Sidewalk & Detectable Warnings (Concrete) to indicate the total from this table.

Identify each driveway, by location.

				Sum	mary of Pern	nanent Drive	ways						
Pay Item		Units of	Qua	ntity	Total G	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

28. Summary of Sidewalk and Detectable Warnings

522 and 527: Sidewalk

Return to Summary Table List

This table is intended for use with Sidewalk and Detectable Warnings. Each detectable warning location/ElementID must be listed, with the appropriate area.

For concrete driveways, the quantity may be shown on this Summary Table (as 6" sidewalk/driveways), or the Summary of Permanent Driveways. For quantities summarized on the Summary of Permanent Driveways, add a row to this Summary Table to indicate the total from the former table.

				Summary of	f Sidewalk a	nd Detectab	le Warnings						
Pay Item		Units of	Qua	ntity	Total C	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

29. Summary of Ditch Pavement

524 and 530: Ditch Pavement and Riprap

Return to Summary Table List

This is an optional table; it is intended for use with Ditch Pavement and Riprap. Quantities may be included on Summary of Drainage.

Note: removal of existing ditch pavement is shown on the Summary of Clearing and Grubbing and Removal.

				s	ummary of D	itch Paveme	ent						
Pay Item		Units of	Qua	ntity	Total G	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

30. Summary of Walls

400, 534, etc.

Return to Summary Table List

This table is intended for use with Noise Walls, MSE walls, Perimeter Walls, Gravity Walls, and Retaining Walls. Barrier Walls should be included on the Summary of Permanent Barrier Walls.

Sheet piling associated with a structure is shown on the Summary of Structures, Bridge. Sheet piling not associated with a structure is shown on the Summary of Walls.

Do not include rails on this Summary Table. Use the separate Summary of Railing.

					Summar	of Walls							
Pay Item		Units of	Qua	ntity	Total G	uantity			Location				
Number	Pay Item Description	Measure	P	F	Р	F	Wall No.	Alignment	Begin Station	End Station	Side	Design Notes	Construction Remarks

31. Summary of Guardrail

536: Guardrail

Return to Summary Table List

This table is intended for use with Guardrail. Refer to pay item details for use with Thrie Beam guardrail. For removal of Guardrail, add a column to this summary table for 536-73.

					Summary o	of Guardrail							
Pay Item		Units of	Qua	ntity	Total G	(uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

32. Summary of Permanent Crash Cushions

544: Crash Cushions

Return to Summary Table List

This table is intended for use with Permanent Crash Cushions. Details must be provided for each location.

					Summary	of Perman	ent Crash (ushions							
Pay Item		Units of	Restriction Barrier		Qua	ntity	Total G	uantity			Location				Construction
Number	Pay Item Description	Measure	Restriction (FT)	Barrier (IN)	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Remarks

33. Summary of Fencing

550: Fencing

Return to Summary Table List

This table is intended for use with all types of Fencing. Summarize quantities by location.

Temporary fencing is incidental to permanent fencing.

					Summary	of Fencing							
Pay Item		Units of	Qua	ntity	Total G	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

34. Summary of Performance Turf

570, 571: Turf

Return to Summary Table List

This table is intended for use with both "Performance Turf" and "Performance Turf-Sod", as well as the Prepared Soil Layer.

When applicable, include a row for performance turf in Summary of Drainage. Refer to 570- items for details.

			Sum	mary of Pe	erformanc	e Turf								
Pay Item	Units of			Qua	ntity	Total G	uantity			Location				Construction
Number	Measure	Length (FT)	Width (FT)	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Remarks

35. Summary of Traffic Monitoring Site Items

695: Traffic Monitoring

Return to Summary Table List

This table is only intended for use with Transportation Statistic Office's Traffic Monitoring Sites. For Traffic Engineering and Operations Office or Motor Carrier Size and Weight Traffic Monitoring Sites, refer to the 600-series or 700-series pay items for details.

				Summa	ry of Traffic N	Monitoring S	ite Items						
Pay Item		Units of	Qua	ntity	Total Q	uantity			Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Site No.	Alignment	Begin Station	End Station	Side	Design Notes	Construction Remarks

36 Summary of Utility Items

U1000: Utility Work

Return to Summary Table List

This table is intended for use with Utility Work.

	Summary of Utility Items												
Pay Item		Units of	Quantity		Total Quantity				Location				
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

37. Summary of Structure Quantities

400s: Structures

Return to Summary Table List

This table is intended for use with 400s: substructure or superstructure items, as well as related bridge items.

Incidental quantities that would normally be shown on another component (i.e. signals and gates for movable bridge) may be shown on the Summary of Structures, Bridge.

Retaining Walls and Gravity Walls should be shown on the Summary of Walls. Refer to the Structures Detailing Manual for additional guidance.

Barrier Walls should be shown on the Summary of Permanent Barriers.

Sheet piling associated with a structure is shown on the Summary of Structure, Bridge. Sheet piling not associated with a structure is shown on the Summary of Walls.

	Summary of Structure Quantities												
	Pay Item		Units of	Quantity		Total Quantity		Secondary Quantity			Location		
Section	Number	Pay Item Description	Measure	Р	F	Р	F	Units	Р	F	Location Description	Design Notes	Construction Remarks

38. Summary of Landscape Items

580: Landscape Items

Return to Summary Table List

This table is intended for use with Landscape Items.

Summarize items by pay item and location. For small/large plant pay items, include plant names and sizes. Note all incidental items to be included. For irrigation system, include pipe sizes and lengths, as well as sprinklers and other fixtures.

	Summary of Landscape Items														
Pay Item			Max.	Units of	Quantity		Total Quantity		Secondary Quantity			Location			Construction
Number	Label Pay Item Description Maint. Size		int. Massura	P	F	Р	F	Units	Р	F	Site No.	Location Description	Design Notes	Remarks	

39. Summary of Signalization Items

600s: Signals

Return to Summary Table List

This table is intended for use with Signals and/or ITS Items.

Summarize items by pay item and location.

	Summary of Signalization Rems											
Pay Item		Units of	Quantity		Total Quantity			Loc	ation			
Number	Pay Item Description	Pay Item Description Measure		F	Р	F	Alignment	Begin Station	End Station	Side	Design Notes	Construction Remarks
	·											

40. Summary of Intelligent Transportation System Items

600s: Signals

Return to Summary Table List

This table is intended for use with ITS Items. This table may be used with a Summary of Signalization. If combining ITS and Signalization items, use Summary of Signalization.

Summarize items by pay item and location.

			Summ	ary of Intellig	ent Transport	ation System	s Items					
Pay Item		Units of	Quantity		Total Quantity			Loc	ation			
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Design Notes	Construction Remarks

41. Summary of Signing and Pavement Marking

700s: Signing

Return to Summary Table List

This table is intended for use with Signing and Pavement Marking items.

Summarize items by pay item and location. See pay item 710-90, for updated guidance; details for this LS pay item will not be shown on Summary Tables.

	Summary of Signing and Pavement Marking												
Pau Itom	Pay Item Pay Item Description Un Number Pay Item Description Me		Qua	ntity	Total Quantity		Location						
Number			Р	F	Р	F	Alignment	Begin Station	End Station	Side	Element ID	Design Notes	Construction Remarks

42. Summary of Lighting Items

715: Lighting

Return to Summary Table List

This table is intended for use with Lighting Items.

Summarize items by pay item and location.

Note: See conduit pay items for additional required plan details.

	Summary of Lighting Items											
Pay Item	Units of		Quantity		Total Quantity			Loca	ation			
Number	Pay Item Description	Measure	Р	F	Р	F	Alignment	Begin Station	End Station	Side	Design Notes	Construction Remarks

8.5 Pay Items that Do Not Require a Summary Table

Maintenance pay items do not require a Summary Table.

DO NOT BID and "special" pay items do not require a Summary Table.

8.6 Lump Sum Contracts

Projects or Contracts using pay item 999-2 will continue to require detailed quantities, by location, for work shown in the plans. Complete the summary tables, similar to

traditional pay item projects. Do not include the total quantity.

For example, Roadway guardrail is summarized by location from station A to B as 250', station C to D as 300', and station E to F as 500'; do not provide pay item number 536-1-1 or the total quantity. Pay item numbers related to specific work are not needed on Summary Tables but may be used to describe work to be completed.

DESIGN GROUPS/CATEGORIES, CATEGORY DATA, AND PAY ITEM ALTERNATE GROUPINGS

9.1 General

Pay items are assigned to Design Groups (Categories) on the project when loading pay items via the Designer Interface. This is done both when adding pay items manually and by automation from the CADD file. Some items may be loaded in multiple categories. Refer to the details available in the **BOE Pay Item Database**.

9.2 Design Groups / Categories

Pay items are loaded and grouped by Categories when placed on the project via the Designer Interface. Each category type has details on the Category Header. The Structures Category Header details requires the designer to provide additional details about the design of the structure. Each bridge structure is placed in a separate category.

To create the additional structures categories needed the designer can select, copy, and/or delete categories from the project record within the Designer Interface.

At a minimum, each component set of plans (structures, roadway, lighting, etc.) must have a corresponding category. In accordance with the FDOT Design Manual (FDM), it is possible to have minor/incidental work from another design group included on the roadway plans, yet still have a separate category for the pay items. Unused/blank categories should be deleted when no work on the project is shown for the design group.

9.2.1 Pay Items, Categories, and Component Plans

Pay items within a category must correspond to the work shown in the component plans. For example, the signal pay items shown in the signalization category must correspond to the work shown in the signalization plans.

Category totals are used for reporting purposes. Ensure that all work shown in a category uses the appropriate items for that category. Additional reminders are as follows:

For landscaping- all work must be detailed in the plans.

For structures- each bridge must be entered separately. All work associated with each structure must be entered accordingly.

For signalization - use signals pay items.

For lighting- use lighting pay items.

Note: Some pay items are valid in multiple categories, such as conduit or pull boxes. Some items are separated by category and specification, such as pavement

markings. Select the pay item appropriate for the category and work to be completed. Refer to the Specifications for materials and installation requirements.

When a project does not have a roadway component (structures only, signalization only, landscape only, etc.), the "roadway" pay items are loaded into the category that corresponds with the primary component plans. For example, Mobilization and Maintenance of Traffic are included in the signalization component plans and category of a "signalization project" without roadway plans. The pay items within a category will continue to correspond to the work shown in each of the component plans.

Additional details may be included with specific pay items and/or summary tables.

Supplemental Description for Lump Sum Pay Items: Supplemental Descriptions are required to differentiate lump sum items on projects and proposals. For most lump sum pay items, designers must enter the project's FPID in the Supplemental Description through Designer Interface. For structures lump sum pay items, designers must enter the project's FPID and Bridge Number in the Supplemental Description through Designer Interface.

The Supplemental Description provides a reference for each lump sum pay item to the corresponding project and/or structure. Supplemental Descriptions are used for lump sum pay items having both lump sum as the secondary unit of measure, such as 101-1 Mobilization (LS/LS), and lump sum pay items having a secondary unit of measure, such as 110-1-1 Clearing and Grubbing (LS/AC).

Do not add supplemental descriptions to other pay items, as this will prohibit the pay item from "rolling up" for bidding purposes.

9.2.2 Bridge Structure Category Details

The Bridge Structure Category details are to be entered into the Bridge Category Header. For each bridge category, the Designer Interface requires that the Bridge Category Header information specific for the bridge ID to be entered prior to loading or editing the pay items for the structure. The following fields must be completed.

Alternate Code: leave blank unless using alternate structures. Contact your District Estimates Office for assistance when considering alternate structures. Alternates are defined and explained in 9.3.

Bridge Length (feet): Enter the total bridge length, not including approach slabs.

Bridge Width (feet): For new/replacement bridges or bridge repair, enter the total bridge deck width, from outside to outside of traffic railing. For bridges with variable width, divide the total bridge deck area, outside to outside, by the length to obtain the average width. For bridge widening, enter the widened width.

Number of Spans: Enter the correct number of spans.

Bridge Type ("Structure Type" on some reports): Select the appropriate type. Options are Box Culvert, High Level Bridge (over water), Low Level Bridge (over water),

Medium Level Bridge (over water), Miscelleneous, Movable Bridge, Overpass (over road/railroad), Pedestrian Overpass, Ramp Overpass (over land), or Viaduct (over land). See SDG 1.1.4 for bridge level definitions.

- Box Culvert is ONLY for bridge culverts greater than 20'; box culverts not meeting bridge definition should be loaded in Roadway Category, regardless of where plan sheets are located.
- Retaining Walls are loaded in Roadway Category, regardless of where plan sheets are located.
- Pedestrian overpass must have bridge ID, due to "over roadway" condition. Pedestrian "trail" bridges may be loaded in roadway, if they are not designed for vehicular weights and do not need to be inspected. Coordinate with District or CO Bridge Maintenance to determine of "trail bridge" is assigned a bridge ID.

Bridge ID: Enter the valid bridge number. For bridge replacements, use the new bridge ID (replacement) number, not the "existing" or old number.

Note that the Structures Detailing Manual (also referenced by the FDM) recommends that the bridge ID be obtained in the early design phase. By phase 2 and phase 3 submittals, as defined in the FDM, this information must be known in order to correctly complete the bridge category information.

Do not enter invalid bridge ID numbers or alpha characters. Contact the District Maintenance Office to obtain a valid bridge number for any structure, including Pedestrian Bridges or other structures that may be subject to inspection.

Pedestrian bridges over travel lanes are subject to inspection. Other pedestrian bridges will be considered on a case-by-case basis, depending on the location and anticipated loading. Contact the Maintenance Office for guidance.

Bridge Designer: Select the applicable coder for the design firm.

Superstructure Type: Select the appropriate type. Options are AASHTO Girder, AASHTO PT or Bulb PT Girder, Cable Stayed, Concrete Box (Cast-in-Place), Florida Bulb-Tee, Florida I-Beam, Florida U-Beam, Inverted Tee, Segmental Balanced Cantilever, Slab (Cast-in-Place), Slab (precast), Steel Box Girders, Steel Truss, or Steel Plate Girder/Rolled Shape. For box culverts, select "Concrete Box (Cast-in-Place)".

Substructure Type: Select the appropriate type. Options are Drilled Shaft Bent, GRS-IBS, Multi Columns, Pile Bent, Single Column, or Other. For box culverts, select "Other".

Foundation Type: Select the appropriate type. Options are Cylindrical Concrete Piles, Drilled Shafts, GRS Abutments, Post Grouting Drilled Shafts, Prestressed Square Piles, Spread Footing, Steel H Piles, Steel Pipe Piles, or Special. For box culverts, select "Special".

Structure Location: Select the appropriate type. Options are Over Road, Over Water, or Over Railroad.

Structure Work Type ("Type of Work" on some reports): Select the appropriate type. Options are New Bridge Construction, Bridge Widening, Bridge Repair, Retaining Walls only (not used), Fender System Only, Rail Retrofit, Miscellaneous. For Pedestrian overpass or Box Culvert, select "Miscellaneous".

Structure Work Class ("Actual Work" on some reports): Select the appropriate Structure Work Class from the following:

New Bridge Construction Structure Work Classes:

IACM DIL	age Construction Structure Work Classes.
01A	Major Bridge – Bascule Spans
01B	Major Bridge – Curved Steel Girders
01C	Major Bridge – Multi-Level Roadways
01D	Major Bridge – Concrete Segmental Construction
01E	Major Bridge – Steel Truss Construction
01F	Major Bridge – Cable Stayed Construction
01G	Major Bridge – Over Water (Bridges of conventional construction
	which are over a water opening of 1,000 feet or more)
01H	Major Bridge – Cast in Place/Post-Tensioned/Super-Structure
02	Minor Bridges (have span lengths not exceeding 50 feet center to
	center of cap and total length not exceeding 300 feet)
	(includes Concrete Box Culverts with a span length 20 feet or greater)
07	Intermediate Bridges (contain none of the types of construction listed
	under Major Bridges and have span lengths exceeding 50 feet center
	to center of cap)

Bridge Repair and Rehabilitation Structure Work Classes:

08	Bascule Bridge Rehabilitation
30F	Bridge Painting
30L	R&R Minor Bridges (have span lengths not exceeding 50 feet center
	to center of cap and total length not exceeding 300 feet)
	(includes Concrete Box Culverts with a span length 20 feet or greater)
30M	R&R Intermediate Bridges (contain none of the types of construction
	listed under Major Bridges and have span lengths exceeding 50 feet
	center to center of cap)
30N	R&R Major Bridge – Multi-Level Roadways
30O	R&R Major Bridge – Concrete Segmental Construction
30P	R&R Major Bridge – Steel Truss Construction
30Q	R&R Major Bridge – Cable Stayed Construction
30R	R&R Major Bridge – Over Water (Bridges of conventional
	construction which are over a water opening of 1,000 feet or more)
30S	R&R Major Bridge – Curved Steel Girders
30U	Cathodic Protection
30Y	Bridge Deck Overlay

After loading all bridge header information through the Designer Interface, verify

the project and category header information by running the Project Edit Report. This bridge header information can then be saved and loaded into the Designer Interface Quantities Builder, a CADD program. The output from the Builder in XML format can be used as input at the Designer Interface for project data to auto-populate into AASHTOWare.

Bridge Category Header fields may be developed during PD&E stage. In that case, Bridge Category Header fields need to be updated or verified through the different design phases to keep up with project design changes.

9.2.3 Additional Information and Considerations for Populating Data on Bridge Categories

Movable Bridges, Control House and Control Equipment: For all movable bridges, follow the instructions above for entering each bridge in a separate category, including bridge ID, length, width, etc., to complete bridge category headers. Load pay items applicable to each bridge in the appropriate bridge category.

For parallel movable bridges controlled by a common control house, the control house is associated with the nearest/attached bridge. Only the control house and common electrical/control equipment pay items are loaded with the nearest/attached bridge. Pay Items common to both bridges include: Bridge Operator, Functional Checkouts, Preventative Maintenance, Electrical/Control Equipment.

Box Culverts, Less Than 20 Feet: Pay items and quantities for box culverts that do not meet the Bridge definition are to be loaded in the Roadway Category. Follow the FDM instructions for placement of the box culvert details in the Structures plans.

9.3 Alternates

When alternates are included in the project design, the bidder is presented with different sets of pay items that make up each alternate scope of work. Documenting and creating the alternate sets of pay items may be accomplished via Pay Item Alternates or Category Alternates. The designer has access to set the alternate sets from within the Designer Interface.

If there is a need to consider alternate pay items or alternate categories, contact your District Estimates Office for assistance. Additional coordination may be needed with Contracts Administration for any innovative contracting.

NOTE: The innovative contracting-type Scope Alternates are not documented the same as category and pay Item alternates.

Revision History

This is the revision history for the *Introduction* and *Chapters 1-10*. Previous iterations of the *BOE* included the revision history at the end of each respective chapter. Revisions and history of individual pay items are available through the State Specifications and Estimates Office, care of the Basis of Estimates Coordinator.

Introduction

- 11-1-21: Updated header for 2022 edition.
- 11-1-20: Updated header for 2021 edition.
- 11-1-19: Updated header for 2020 edition.
- **12-1-18:** Updated header for 2019 edition. Updated web links for fdot.gov web pages.
- **11-21-17:** Updated header for 2018 edition. Updated web links and references to Program Management Office.
- 10-4-16: Updated header for 2017 edition.
- 12-30-14: Updated header for 2015 edition.
- **1-15-14:** Updated header for 2014 edition. Added definition of a pay item.
- 2-20-13: Updated header dates for 2013 edition.
- **11-23-11:** Updated header dates for 2012 edition.
- **12-1-10:** Updated header dates for 2011 edition.
- **12-9-09:** Expanded *Revisions and Updates* to include a limitation on the lifespan of an *Estimates Bulletin*.
- 10-30-09: Updated header dates for 2010 edition.
- **6-30-09:** Removed draft watermark. Updated header date for publication.
- 11-14-08: Updated internet links to current addresses.
- **11-5-08:** Updated formatting in accordance with Forms and Procedures Office's recommendations.
- **10-1-08:** Updated header dates for 2009 edition. Forms- added note to indicate form is optional.

Chapter 1

- **11-3-21:** Updated/reorganized chapter information. Added Glossary and moved Registration info to website. Renamed chapter to *Glossary, Applications, Reports, and Project Data Validation.* Updated header dates for 2022 edition.
- 11-1-20: Update header dates for 2021 edition.
- 11-1-19: Update header dates for 2020 edition.
- **12-1-18:** Update header dates for 2019 edition. Update web links for fdot.gov web page. Removed critical dates for 2016/2017 editions.
- 11-1-17: Update header dates for 2018 edition.
- 7-6-17: Update header dates for 2017 edition.

- **10-24-16:** Update header dates for 2016 edition. Updated contact database hyperlink. Updated office titles. Updated critical dates.
- **7-26-16:** Updated 1.5 with proposed schedule for coordinated implementation.
- **11-25-15:** Updated header dates for 2016 edition. Added note to 1.5 regarding coordination with specs and standards implementation dates.
- 12-30-14: Updated header dates for 2015 edition.
- **12-2-13:** Updated header dates for 2014 edition.
- **2-20-13:** Updated header dates for 2013 edition.
- 11-23-11: Updated header dates for 2012 edition.
- **12-1-10:** Updated header dates for 2011 edition.
- 10-30-09: Updated header dates for 2010 edition.
- **10-19-2009:** Removed cover letter reference; all major changes announced with a bulletin
- **10-1-2008:** Updated header dates for 2009 edition.

- **11-3-21:** Incorporated Chapter 10. Reorganized/updated chapter information and renamed to *Pay Items General Information*. Updated header dates for 2022 edition.
- **1-22-21:** Updated calculation guidance in 2.3, per CADD Office.
- **11-1-20:** Updated header dates for 2020 edition. Added 2.3 heading for secondary units. Added FD Feet-Day, BF Board Feet, MG Thousand Gallons, MO Month, NM Net Mile, and PM Per Mile units of measure.
- **11-1-19:** Updated header dates for 2020 edition. Removed old footnote for Mile (MI) units. Updated 2.1 guidance for Lump Sum pay items.
- **11-1-18:** Updated header dates for 2019 edition. Deleted 2.3 metric conversion factors. Added note for item vs. each.
- **10-23-17:** Updated header dates for 2018 edition. Added reference to Chapter 9 for Supplemental Description used with Lump Sum items.
- **6-22-17:** Added LS/LS information for rounding partial payment percentage, per Final Estimates- Construction Office request.
- **10-25-16:** Updated header dates for 2017 edition. Added abbreviations and rounding information. Removed discontinued section 2.4 Accuracy/Precision information updated in 2.1 and 2.2.
- **3-14-16:** Added information for secondary units to 2.1.
- 2-1-16: Added note for removal of alphabetical list.
- **11-25-15:** Updated header dates for 2015 edition. Corrected AC unit of measure to 1/100 AC.
- **12-30-14:** Updated header dates for 2015 edition. Added end date to PM unit; refer to Rumble Strip pay items for details.
- **2-27-14:** Removed units for Clean-out (CO), Bushel (BU), Dollars per Day (DD), Luminaire (LU).
- **12-2-13:** Updated header dates for 2014 edition. Added note to 2.1 to indicate that abbreviated text for pay item descriptions may vary from with Design Standards. Moved Alphabetical list from Chapter 3 to 2.4.

- **2-20-13:** Updated header dates for 2013 edition.
- **11-23-11:** Updated header dates for 2012 edition.
- **12-1-10:** Updated header dates for 2011 edition.
- 10-30-09: Updated header dates for 2010 edition.
- **1-28-09:** Added 2.2 Accuracy. Renumbered 2.3 Conversion Factors.
- **10-1-08:** Updated header dates for 2009 edition.

- **11-3-21:** Reorganized/updated chapter information and renamed to *Project and Proposal Cost Estimates.* Updated header dates for 2022 edition.
- **11-1-20:** Updated header dates for 2021 edition. Changed the scope of the chapter to address estimating guidance to Designers, working with FDM changes.
- 11-1-19: Updated header dates for 2020 edition.
- **12-1-18:** Updated header dates for 2019 edition.
- 10-25-16: Updated header dates for 2017 edition. Ongoing draft text.
- 11-25-15: Updated header dates for 2016 edition.
- **12-30-14:** Updated header dates for 2015 edition. Added DQE definition.
- -14-14: Started adding DRAFT text for new section.
- **12-2-13:** Deleted 3.2. Moved Alphabetical List to Chapter 2.
- **2-20-13:** Updated header dates for 2013 edition.
- **11-23-11:** Updated header dates for 2012 edition.
- 2-1-10: Updated header dates for 2011 edition.
- **5-14-10:** Restored Alphabetical Index. Created explanation text for chapter.
- **10-30-09:** Updated header dates for 2010 edition.
- **10-1-08:** Updated header dates for 2009 edition. Deleted "Alphabetical Index" chapter. Users, please use search/find, as needed.

Chapter 4

- **11-4-21:** Reorganized/updated chapter information and renamed to *Pay Items for Alternative Contracts.* Removed guidance on using Bid Factor Bidding on Push-button contracts per Program Management Office Bulletin 20-04/Contracts Administration Bulletin 20-01 dated 12-2-2020. Updated header dates for 2022 edition.
- 11-1-20: Updated header dates for 2021 edition.
- 11-1-19: Updated entire chapter. Updated header dates for 2020 edition.
- **7-1-19:** Updated 4.4 for Pay items on Push Button Contracts.
- **12-1-18:** Updated header dates for 2019 edition.
- 10-31-17: Updated header dates for 2018 edition.
- **3-3-17:** Draft started for Alternative Contracts. Moved text from BOE Chapter 6 to 4.1.
- **10-25-16:** Updated header dates for 2017 edition.
- 11-25-15: Updated header dates for 2016 edition.
- 12-30-14: Updated header dates for 2015 edition.

- **4-30-14:** Updated header dates for 2014 edition.
- **2-20-13:** Updated header dates for 2013 edition.
- 11-23-11: Updated header dates for 2012 edition.
- 11-23-10: Updated header dates for 2011 edition.
- **10-30-09:** Updated header dates for 2010 edition.
- 10-01-08: Updated header dates for 2009 edition.

- **11-4-21:** Moved contact information to website, eliminating the need for this chapter. Updated header dates for 2022 edition.
- **11-1-20:** Updated header dates for 2021 edition.
- **11-1-19:** Updated header dates for 2020 edition. Updated LRE, DQE, and Specifications contacts.
- **12-1-18:** Updated header dates for 2019 edition. Updated Maintenance contacts.
- **7-16-18:** Updated Program Management contact names.
- **10-23-17:** Updated header dates for 2018 edition. Updated CADD and Specifications contacts. Replaced office contacts with web links to various offices.
- 10-25-16: Updated header dates for 2017 edition.
- **5-24-16:** Updated names and phone numbers for responsible office contact persons. Updated web address in 5.2.
- **2-1-16:** Updated header dates for 2016 edition. Corrected names and numbers.
- **12-30-14:** Updated header dates for 2015 edition. Corrected names and numbers.

Corrected ITS and TMS references, due to changes in 600 series.

- **4-30-14:** Updated header dates for 2014 edition. Corrected names and numbers.
- **2-20-13:** Updated header dates for 2013 edition. Corrected names and numbers for Specifications Office contact persons.
- 11-23-11: Updated header dates for 2012 edition.
- **10-24-11:** Updated names and phone numbers for responsible office contact persons.
- **11-17-10:** Removed table 5.2 for District Estimates and Specifications Offices; added link to contact list on web page. Updated header dates for 2011 edition.
- 10-30-09: Updated header dates for 2010 edition.
- **10-29-09:** Updated Pay Item ranges & contact persons.
- 10-22-09: Updated contact information for CO and District Specs/Estimates.
- **10-22-08:** Updated contact information for District Specs/Estimates.
- **10-1-08:** Updated header dates for 2009 edition.
- **10-1-08:** Updated CO Specs contact information.
- **5-28-08:** Updated contact information for Districts 3.

Chapter 6

11-4-21: Reorganized/updated chapter information. Updated header dates for 2022 edition.

- **11-1-20:** Updated header dates for 2021 edition. Editorial changes to 6.8, to be consistent with Specifications Handbook.
- **11-1-19:** Updated header dates. Updated the pay item process and graphic.

Renumbered section, as needed. Updated Generic Items, to limit applications to only Utility category work.

- **12-1-18:** Updated header dates for 2019 edition.
- **10-30-17:** Updated header dates for 2018 edition. Changed "Trial Pay Items" to "Project Specific". Removed 6.10- Related Documents.
- **10-1-16:** Updated header dates for 2017 edition.
- **2-1-16:** Updated header dates for 2016 edition. Clarified difference between open/activating and new pay items in 6.2.
- **12-30-14:** Updated header dates for 2015 edition. Corrected minor spelling and punctuation errors.
- **4-30-14:** Updated header dates for 2014 edition. Added notes for Comp

Books/Summary Boxes in 6.10. Updated hyperlinks.

- **2-20-13:** Updated header dates for 2013 edition.
- 11-23-11: Updated header dates for 2012 edition.
- **10-17-11:** Added Pay Item Process flowchart, with details about color paths. Updated 6.2 through 6.7 to refer to the flowchart processes.
- **4-21-11:** Updated header date. Revised 6.5.2 regarding Technical Special Provisions and/or plan details to refer to 7.3 of the BOE. Revised 6.9 to detail differences between Developmental, Trial, and Special Use pay items.
- **11-22-10:** Updated header dates for 2011 edition. Expanded 6.2 and 6.3 for e-mail requests.
- **3-10-2010:** Updated 6.5.2 to expand generic pay item rules to duplicate LS projects.
- **12-9-2009:** Inserted section 6.5 Generic Pay Items. Text is based on Estimates Bulletin 09-06, and the accompanying Guidelines for Usage of Generic Pay Items.
- 10-30-2009: Updated header dates for 2010 edition.
- **10-1-2008:** Updated header dates for 2009 edition.
- **10-1-2008:** Updated text to make the pay item request form optional. Complete information may be submitted by e-mail.

Chapter 7

- **11-4-21:** Reorganized/updated chapter information and renamed to *Pay Item Documentation*. Moved some content to Chapter 2. Updated header dates for 2022 edition.
- **11-1-20:** Updated header dates for 2021 edition. Formatted text in 7.2. Added 2021 FDM guidance to 7.4.
- **4-17-20:** Added "S" code for specification type. Expanded guidance in 7.2.
- **11-1-19:** Updated header dates for 2020 edition. Added 7.4.2 for pay item notes.
- **12-1-18:** Updated header dates for 2019 edition. Added text for pay item descriptions. Added 7.7 for Proprietary Products.
- **8-8-18:** Updated 7.1 and 7.4 references from PPM to FDM chapters.

- **10-23-17:** Updated header dates for 2018 edition. Updated PPM reference and web page to FDM. Updated General Notes quote from 2018 FDM.
- **8-12-16:** Added PPM reference to 7.4 for active voice wording. Updated web links to fdot.gov.
- **5-9-16:** Updated 7.2 to include B value.
- 2-1-16: Updated header dates for 2016 edition. Updated PPM reference in 7.4.
- **12-30-14:** Updated header dates for 2015 edition. Added third paragraph to 7.1 to define Tech Specs and refer to specs web page. Corrected missing text from last sentence of 7.6.1.
- **5-14-14:** Updated 7.2 to include developmental specs.
- **1-14-14:** Updated header dates for 2014 edition. Updated "Spec Type" flag list. Included Quick Reference information into section 7.3. Updated hyperlink.
- **2-20-13:** Updated header dates for 2013 edition.
- **12-30-11:** Added 7.5 to include Plan Quantity information, per Estimates Bulletin 11-06.
- **11-23-11:** Updated header dates for 2012 edition.
- **10-17-11:** Added 7.4 to detail pay item notes, along with PPM guidance.
- **4-21-11:** Updated header date. Moved text from "Quick Reference" to new section 7.3.
- The "Quick Reference" content will also be available as a separate file online.
- **11-23-10:** Updated header dates for 2011 edition. Added color to "Quick Reference" page.
- **5-14-10:** Updated "Quick Reference" page.
- 10-30-09: Updated header dates for 2010 edition.
- **9-16-09:** Changed chapter title from Plan Notes to Design Tools. Added section for Tech Spec and other flags. Added "Quick Reference" page.
- 10-1-08: Updated header dates for 2009 edition.
- **5-28-08:** Deleted notes; refer to PPM for current information for: Key Sheet Notes, Typical Section Notes, Summary of Quantities Sheet Notes, Plan and Profile Sheet Notes, Pay Item Footnotes, Drainage Map Notes, and Utility Adjustment Sheet Notes.

- **11-4-21:** Reorganized/updated chapter information. Removed section for Summary Boxes see 2021 BOE for information. Updated header dates for 2022 edition.
- **5-5-21:** Updated Summary of Signing and Pavement Marking: Updated requirements for 710-90- Final Surface Markings, LS, per pay item details.
- **2-2-21:** Updated Summary Table titles and order, to coordinate with the latest CADD release. Ongoing coordination with the CADD Office.
- **11-1-20:** Updated header dates for 2021 edition. Separate "Summary Table" information for FDM 2121 projects in this file. Instructions for "Summary Boxes", valid for FDM 2020 projects, are in a separate Chapter 8 posting.
- **11-1-20:** Updated header dates for 2021 edition. Added notice at top of file for transition between Summary Boxes and NexGen Estimates Reports.
- **1-24-20:** Updated Summary Box numbering. Added Summary of Special Detours.
- **11-1-19:** Updated header dates for 2020 edition. Noted pending change for Special Detours.

11-1-18: Updated header dates for 2019 edition. Added Summary of Temporary Highway Lighting. Added Summary of Pedestrian Special Detours, Summary of Pedestrian Channelization Devices. Renumbered summary boxes.

2-20-18: Expanded 8-1 to clarify limitations for custom summary boxes.

8-1, Expanded information regarding use of the Design Notes Column.

8-3, List of Summary Boxes- added Summary of Temporary Longitudinal

Channelization Devices. Renumbered remaining summary boxes.

Summary of Lump Sum Items- added text to require summary of quantities based on secondary units.

Summary of Temp Traffic Control...- Added text to require whole numbers for EA and ED items, to prevent "reverse calculation" of quantities. Also clarified summary of MOT and final surface paint.

Summary of Temp Signalization- Added text to allow/recommend design notes column to identify intersections.

Summary of Temporary Longitudinal Channelization Devices- new summary box added. Summary of Permanent Barriers (formerly Barrier Wall)- Updated title based on specification and standard index terminology change.

8-3.3 Added text for plans with multiple projects.

Throughout chapter: for existing PPM references added FDM references.

11-1-17: Updated header dates for 2018 edition. Removed introductory text for Summary Box implementation.

7-6-17: Minor updates:

- Clarified text for roadway pay Items on projects without Roadway component plans.
- Added text to clarify contingency items vs. overruns/adjustments.
- Summary of Lump Sum Items: Clarified usage note.
- Summary of Earthwork: Added guidance for pay items with SY units.
- Summary of Sidewalk: Deleted note for removal of sidewalk. See details for 522items.
- **4-11-17:** Added note to prohibit custom/project specific summary boxes.
- **2-2-17:** Added notes for Monitor Existing Structures. Added instructions and example for Temporary Traffic Control Devices with different durations within a phase.
- 11-1-16: Updated header dates for 2017 edition.
 - Summary of Clearing and Grubbing & Removal Items: Updated title, replaced graphic.
 - Summary of General Items: removed old note.
 - Summary of Box Culverts: Clarified instructions for bridge culverts.
 - Summary of Performance Turf: Removed note regarding Temporary Sod. Future quidance pending.
 - Summary of Traffic Monitoring Site Items: added graphic.
 - Examples: Added text to clarify some of the correct/incorrect features.

6-8-16: NO policy or instruction changes were made. Corrected title of "Traffic Monitoring Site". Updated examples. Added Landscape Soil details.

1-28-16: Updated entire Chapter for 2016 edition.

- o Header: Updated header dates.
- 8-1: Expanded 3rd paragraph to include calculation note.

- 8-2: Clarified that empty columns/rows do not need to be deleted. Added reminder to keep Construction notes column reserved for construction use (not used by designer). Added note to restrict added subtotals.
- 8-3: Clarified sheet numbering. Updated PPM reference. Converted list to table.
 Added hyperlinks to sample box and examples.
- o 8-4: Added "and Instructions" to article heading. Added note regarding examples.
- o 8-5 through 8-8: Corrected article numbering.
- 8-5: Expanded text to clarify calculations. Added PPM reference for sheet numbering.
- Summary of General Items: updated guidance. Removed reference to Traffic Monitoring due to new summary box.
- o Summary of Special Detour Quantities: Summary Box removed; no longer valid.
- Summary of Monitor Existing Structures: New Summary Box, per bulletins and 2016 PPM. Note change from "Protection of Existing Structures" to "Monitor Existing Structures".
- o Summary of Removal Items: Clarified note for LS item.
- Summary of Geotechnical Items: Clarified note for specification reference.
- o Summary of Turnouts: Clarified guidance for showing surface course.
- Summary of Pavement: Clarified guidance for driveways and overbuild.
- Summary of Misc. Asphalt Pavement: Removed obsolete note.
- Summary of Sidedrain & MES: updated guidance for Sod/Turf, added reference to PPM, and added note for updated summary box.
- Summary of Sidewalk & Detectable Warnings: Clarified guidance for driveways.
- Summary of Permanent Driveways: Clarified guidance for asphalt driveways.
- Summary of Traffic Monitoring Items: Sample summary box is pending.
- Added Examples & links for all summary boxes. Additional populated examples will be added as they become available.
- Landscape tabulation of Quantities: This tabulation sheet may include the plant
- **8-20-15:** Added Summary Box Examples to end of chapter. Added note above 8.1 Introduction. Formatted 8-3 table for Summary Box Order, to include hyperlinks within chapter to instructions and examples for each summary box.
- **8-6-15:** Added text to 8.1 Introduction, to address 5-day language for response to quantity questions from Construction. This text was previously located in the *Computation Methods for Design, Construction, and Final Estimates Handbook.* Added text to Summary of Miscellaneous Drainage Items, Summary of Side Drain and Mitered End Sections, Summary of Trench Drain, Summary of Underdrain, and Summary of French Drain, to clarify usage and avoid duplication of quantities.
- **4-28-15:** Added details to Summary of Pavement, to require overbuild quantities to be shown separately from structural quantities. Removed reference to Field Office from Summary of General Items. Removed reference to Special Detours from Summary of Temporary Traffic Control Plan Items. Added note to keep Summary of Temporary Signalization & Detection separate from Summary of Temporary Traffic Control Devices.

2-20-15: Updated note for Summary of Permanent Barrier Wall, to address 521-8 items. Added Summary of Temporary Signalization to list in 8-3. Marked Summary of Special

Detour with strikethrough, due to Estimates Bulletin 14-06. Added Summary of Cable Barrier (Pending).

- **2-10-15:** Updated Summary of Structure Quantities and Summary of Walls with note for Sheet Piling. Replaced Summary of Drainage Structures box. Updated note for Special Detour, per Estimates Bulletin 14-06. Updated Summary of Miscellaneous Asphalt; removed column for Temporary Sidewalk.
- **12-30-14:** Updated header dates for 2015 edition. Removed contact information from header. Updated note in red at top of chapter to refer to revision history. Added text to 8.2 for summary box totals to be shown on the first page, per the CADD templates. Added text to 8.3 for multiple projects let under one contract.
- **10-20-14:** Added note to Summary of Guardrail for removal pay item.
- **10-17-14:** Updated all graphics for the latest Summary Boxes.
- **10-13-14:** Added rumble strips to Summary of Pavement.
- **9-24-14:** Temporary Signalization- updated detail. When the new box with total is used, do not include the total on the Summary of Temporary Traffic Control Plan Items. If the old box is used, the total remains on the Summary of Temporary Traffic Control Plan Items.
- 9-19-14: Updated details for Summary Boxes, as follows:
 - Temporary Traffic Control Plan Items: Corrected items, based on new boxes.
 Added notes to limit format of summary box. Added note for 710-90 and temporary items.
 - o Added Summary of Temporary Signalization and Detection.
 - Litter and Mowing: added notes for areas identified in the plans.
 - Miscellaneous Asphalt Pavement: updated notes to remove temporary asphalt and temporary sidewalk.
 - Utility Adjustments: updated notes to clarify items to be included.
 - Sidedrain and Mitered End Sections: clarified that pay item numbers are not shown, and are not to be added by designer.
 - Sidewalk & Detectable Warnings: clarified note for location/area ID.
 - Sidewalk, Curb, and Ditch Pavement: added note for removal work. Permanent Crash Cushions: Removed note- CADD file is current.
 - Fencing: Added note for temporary fencing.
 - Performance Turf: Added note for temp sodding.
- **9-19-14:** Update 8.2 to clarify when columns or rows may be added or deleted.
- **9-17-14:** Updated 8.3 to clarify that non-standard tables may not be included with SQ sheets. Changed TABQLT to TABQXX. Added Summary of Temp Signals to list of Summary Boxes.
- **9-16-14:** Updated 8.6 to clarify note location on the Summary of Pay Items.
- **8-28-14:** Updated Special Detour to include Temporary Bridge information.
- **8-12-14:** Updated introductory information to remove "Draft" statement.
- **8-7-14:** Updated instructions for Lump Sum projects, to allow pay item numbers, with notice.
- **4-18-14:** Updated instructions based on user comments.
- **3-17-14:** Added instructions for projects with no roadway component.
- **2-26-14:** Updated text with additional notes and guidance, per CADD webinar training.
- 3-6-13: Complete re-write of Chapter, due to change from Comp Book to Plan Summary

Boxes. Chapter title changed from "Forms" to "Plan Summary Boxes". Refer to Estimates Bulletin 13-09 for details.

2-20-13: Updated header dates for 2013 edition.

11-23-11: Updated header dates for 2012 edition.

7-29-11: Updated web link for Construction forms.

5-19-11: Updated web link for Computation Methods for Design, Construction & Final Estimates Handbook.

11-10-10: Updated header dates for 2011 edition. Updated Construction Office web links. Changed font size from 10 pt to 12 pt.

11-8-10: Inserted 8.5 to better explain Forms and Documentation. Renumbered Estimates Forms from 8.5 to 8.6.

10-30-09: Updated header dates for 2010 edition.

10-6-08: Updated header dates for 2009 edition.

10-6-08: Updated pay item request form information, per Chapter 6. Use of the form is optional.

5-14-08: Inserted 8.4, note from Construction and CADD Offices. Requested by Sherry Valdes, State Construction Office & Kenny Rudd, District 3 CADD Office.

Chapter 9

11-4-21: Reorganized/updated chapter information and renamed to – *Design Groups/Categories, Category Data, and Pay Item Alternate Groupings.* Moved some content to Chapter 1. Updated header dates for 2022 edition.

4-13-21: Updated details for movable bridges, to clarify instructions for category header and loading pay items.

11-1-20: Updated header dates for 2021. Changed footer from "Webgate, PrP and Designer Interface" to "Applications for Designers". Updated reports information, including 2021 FDM guidance. Updated screens/sample graphics.

1-9-20: Added Class 30U for Cathodic Protection to table of Structure Work Classes.

11-1-19: Updated header dates for 2020. Added text to 9.3.1 for locked project. Removed table of contents.

12-1-18: Updated header dates for 2019. Updated Bridge Type/Structure Type instructions.

2-19-18: Updated Bridge Header information in 9.3.2.

10-30-17: Updated header dates for 2018 edition. Added additional text for bridge ID number and pedestrian bridges. Added text for loading box culverts, less than 20'. Leading Zero reference in 9.3 updated to include reference to Chapter 10 for pay item formatting.

9-6-17: Added Supplemental Description information, per Program Management Bulletin 16-02.

5-10-17: Added Structure Work Class to 9.2.2 Bridge Category Header; revised Category/Design Groups.

10-25-16: Updated header dates for 2017 edition. Updated web addresses and Program Management Office title. Removed TRNSPORT references; included PrP references, as needed.

- **12-30-14:** Updated header dates for 2015 edition. Updated note in 9.1. Added last sentence to 9.3.6 to indicate that additional information may be specific to a pay item or summary box.
- **4-30-14:** Updated header dates for 2014 edition. Updated hyperlink.
- **2-20-13:** Updated header dates for 2013 edition. Added note to 9.1 General to indicate software development is ongoing.
- 11-23-11: Updated header dates for 2012 edition. Added note to 9.1.
- **11-23-10:** Updated header dates for 2011 edition. Added note to 9.1 General about pending webTrnsport.
- **10-30-09:** Updated header dates for 2010 edition. Updated formatting for section & subsection titles.
- **1-27-09:** Expanded 9.3.6 to include instructions for projects without roadway component plans.
- **10-1-08:** Updated header dates for 2009 edition.
- **10-1-08:** Updated 9.3.6 Pay Items, TRNS*PORT Category, and Component Plans to include examples of items/category usage.

- **11-4-21:** Moved content to Chapter 2, eliminating the need for this chapter. Updated header dates for 2022 edition.
- **11-1-20:** Updated header dates for 2021 edition. Minor editorial changes. Expanded 10.3 to include Materials, Means & Methods, and Maintenance text. Expanded 10.5.4 to add reference to 2021 FDM changes. Updated references to existing reports and new Estimated Quantities Report.
- **11-1-19:** Updated header dates for 2020 edition.
- **12-1-18:** Updated header dates for 2019 edition.
- **10-31-17:** Updated header dates for 2018 edition. Editorial changes throughout Chapter. Removed fields associated with obsolete computation books. Updated references to PPM/FDM and Design Standards/Standard Plans. Moved Tech Spec information to Chapter 7. Expanded 10.5 for displaying pay items in plans and other documents.
- **8-5-16:** Updated header dates for 2017 edition. 10.2 Specifications: Specification links added to most pay items in DQE. Updated pay item structure information to match DQE screens.
- **2-1-16:** Updated header dates for 2016 edition.
- **12-30-14:** Updated header dates for 2015 edition. Added 10.5 for displaying pay item numbers in plans and specs; renumbered remaining sections.
- **4-30-14:** Updated header dates for 2014 edition. Updated 10.3 for commonly used operations. Updated hyperlink.
- **2-20-13:** Updated header dates for 2013 edition.
- **10-23-12:** Added operations to 10.3, per meeting with Maintenance, Construction, and Roadway Design Offices.
- **9-17-12:** Added typical detail for Rehabilitation operation.
- 11-1-11: Updated header dates for 2012 edition.

2-1-11: Clarified 10.3 relocate and other operations requiring Tech Spec or plan details. Corrected numbering on 10.4 and 10.5.

11-23-10: Updated header dates for 2011 edition. Added reference to Chapter 7 in 10.2, Plan Details.

10-30-09: Updated header dates for 2010 edition.

9-16-09: Added 10.3 Pay Item Structure, with guidance on common operations.

Corrected Office and web links to "State Specifications and Estimates Office".

1-28-09: Expanded 10.2 to include TRNS*PORT Category.

10-1-08: Updated header dates for 2009 edition.