



**END VIEW**  
(WEDGE PLATE, MPA & SPIRAL ONLY)

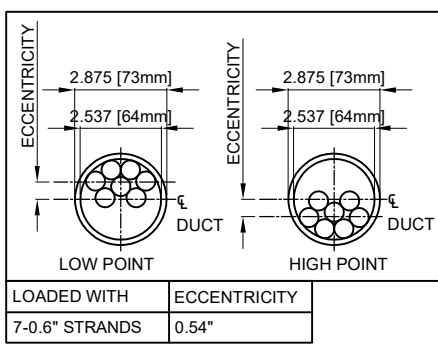


LOADED WITH	ECCENTRICITY
7-0.6" STRANDS	0.54"

**WARNING:** READ AND COMPLY WITH ALL APPLICABLE SAFETY AND OPERATING INSTRUCTIONS AND WARNINGS FOR MULTI-STRAND STRESSING BEFORE STARTING ANY WORK OR OPERATION.



**CAUTION:** WHEN PRESSURIZING GROUT CAPS, DO NOT STAND BEHIND CAPS!

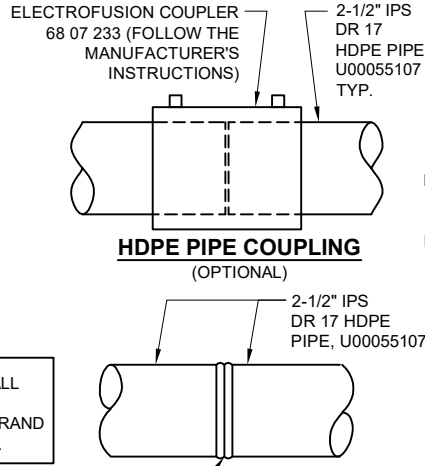

**HDPE PIPE COUPLING**

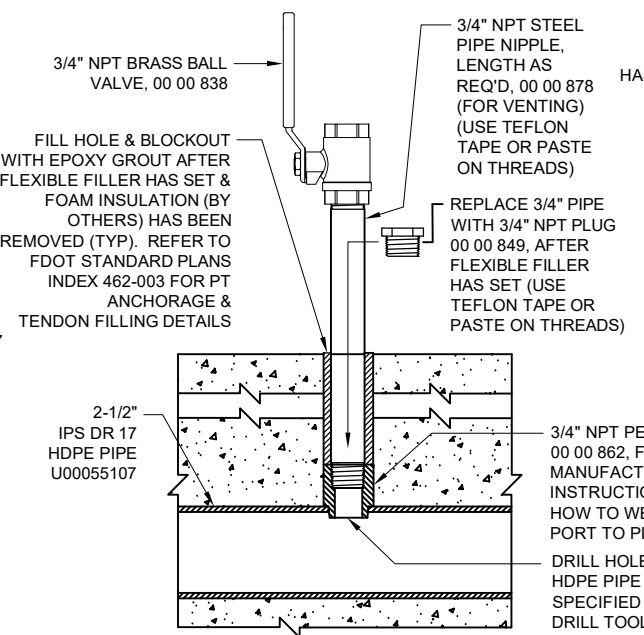


**INTERMEDIATE WAX INJECTION/VENT DETAIL**  
ORIENT IT FOR DRAIN (OPTIONAL)

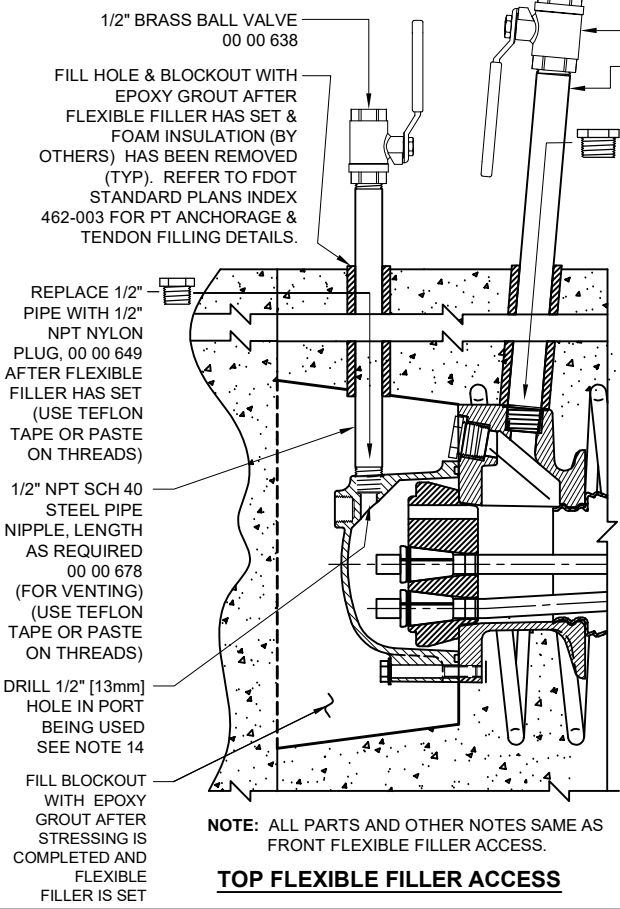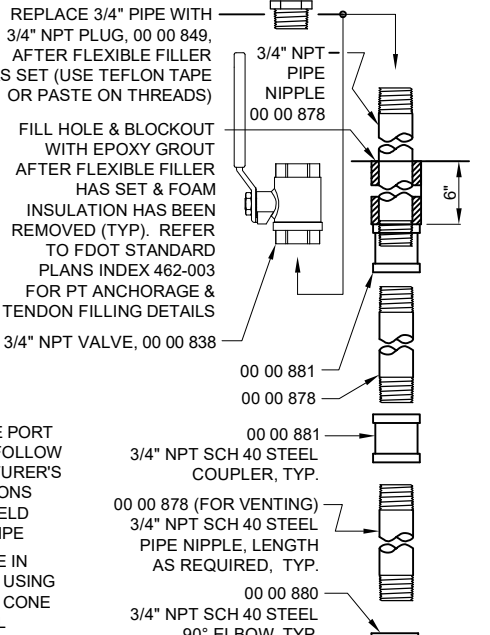

**NOTE:** ALL PARTS AND OTHER NOTES SAME AS FRONT FLEXIBLE FILLER ACCESS.

**TOP FLEXIBLE FILLER ACCESS**

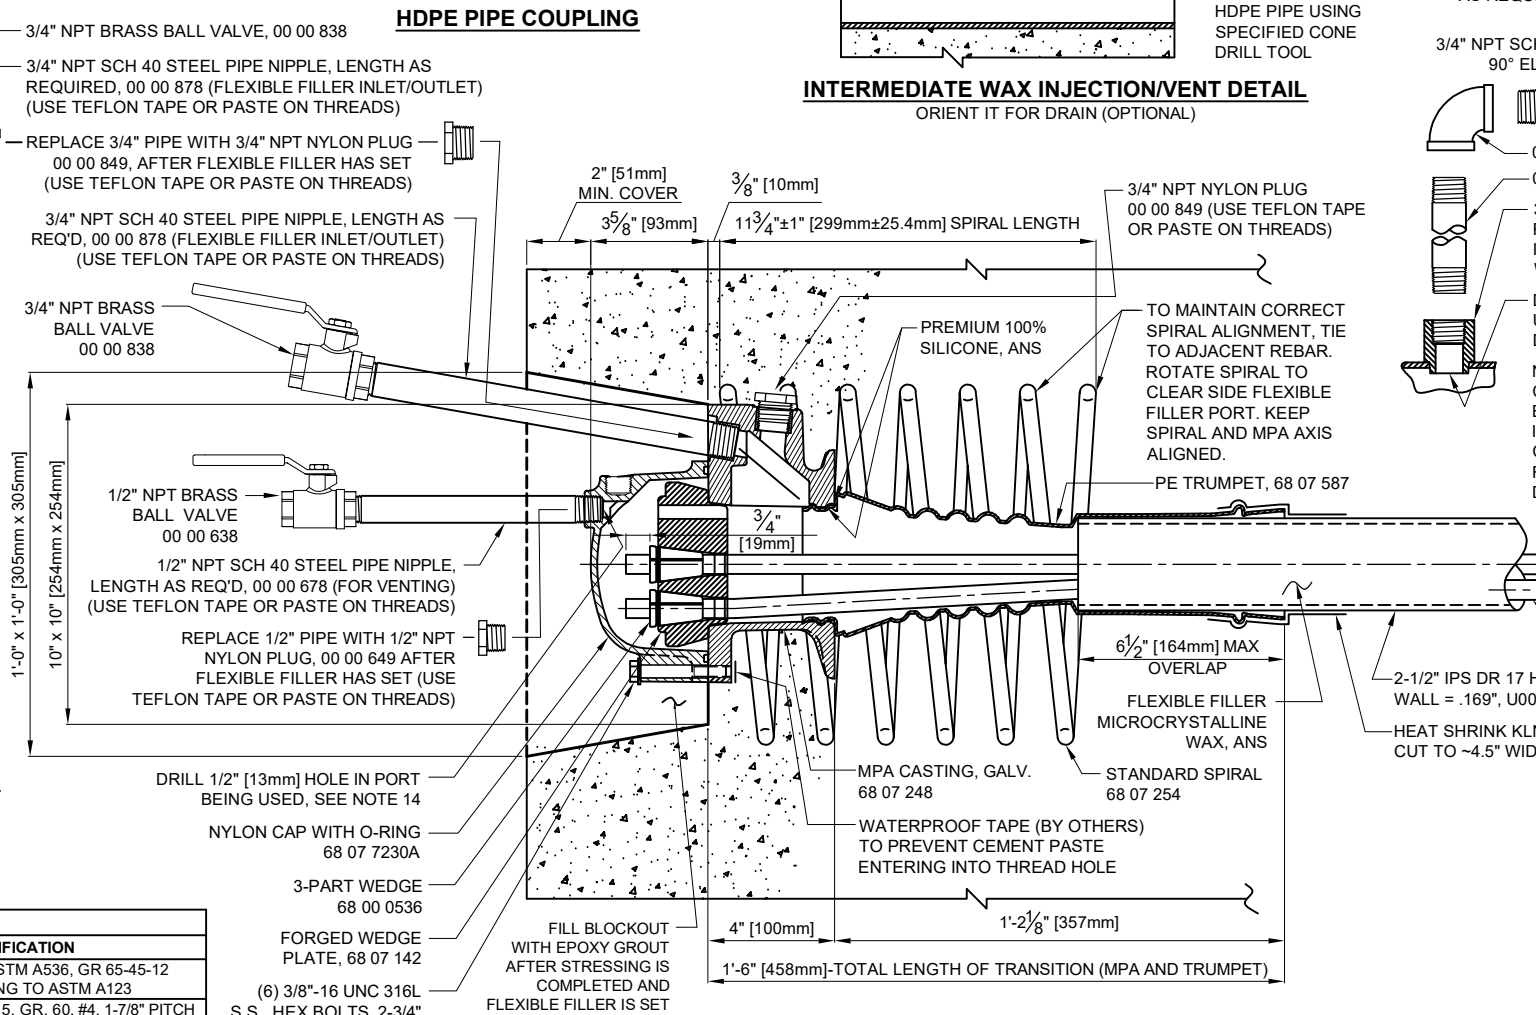

**FRONT FLEXIBLE FILLER ACCESS (SECTION A-A)**

MATERIAL LIST		
PART NO.	DESCRIPTION	MATERIAL SPECIFICATION
68 07 248	MULTI-PLANE ANCHOR CASTING GALVANIZED	DUCTILE IRON ASTM A536, GR 65-45-12 GALV. ACCORDING TO ASTM A123
68 07 254	STANDARD SPIRAL	STEEL ASTM A615, GR. 60, #4, 1-7/8" PITCH 11-1/4" O.D., 6 FULL TURNS
68 07 587	PE TRUMPET	POLYETHYLENE
68 07 142	FORGED WEDGE PLATE	STEEL FORGING, ASTM A-521-76, NORMALIZED, BHN = 180-220
68 07 7230A	NYLON CAP WITH O-RING FOR FLEXIBLE FILLER	CAP: NYLON 6, 20% GLASS FIBER FILLED O-RING: HNBR
U00055107	2 1/2" IPS DR 17, HDPE PIPE	HDPE
U00039063	HEAT SHRINK KLNN WRAP, TYPE L, 18" WIDE CUT TO ~4.5" WIDE IN FIELD	ACCORD. TO FDOT SPECS. P.T. SEC. 960-2.2.1.8
301060	0.6" STRAND	270 KSI LOW RELAX STRAND
68 00 0536	3-PART WEDGE FOR 0.6" STRAND	AISI-C12L14 HEAT TREATED
00 00 771	(6) 3/8"-16UNC HEX BOLTS 2-3/4" LONG	316L STAINLESS STEEL
00 00 774	(6) WASHERS FOR 3/8"-UNC BOLTS	316L STAINLESS STEEL
00 00 878	3/4" NPT PIPE NIPPLE, LENGTH AS REQ'D (TEMP.)	SCH 40, BLACK WELDED STEEL
00 00 838	3/4" NPT VALVE (TEMPORARY)	BRASS
00 00 849	3/4" NPT PLUG	NYLON 6, WHITE

MATERIAL LIST		
PART NO.	DESCRIPTION	MATERIAL SPECIFICATION
00 00 678	1/2" NPT PIPE NIPPLE, LENGTH AS REQ'D (TEMP.)	SCH 40, BLACK WELDED STEEL
00 00 638	1/2" NPT VALVE (TEMPORARY)	BRASS
00 00 649	1/2" NPT PLUG	NYLON 6, WHITE
ANS	FLEXIBLE FILLER MICROCRYSTALLINE WAX	ACCORD. TO FDOT SPECS. 938-5
ANS	TEFLON TAPE OR PASTE FOR THREADS	-
ANS	PREMIUM 100% SILICONE	SILICONE
00 00 878	(OPTIONAL) 3/4" NPT PIPE NIPPLE, LENGTH AS REQ'D	SCH 40 BLACK STEEL
00 00 881	(OPTIONAL) 3/4" NPT SCH 40 COUPLER	BLACK STEEL
00 00 880	(OPTIONAL) 3/4" NPT SCH 40 90° ELBOW	BLACK STEEL
68 07 233	(OPTIONAL) ELECTROFUSION COUPLER	COMPOSITE
00 00 862	(OPTIONAL) 3/4" NPT PE PORT	BLACK HDPE (UV PROTECTED)

**DIMENSIONS: INCH [mm] FOR REFERENCE ONLY**

**INTERNAL FLEXIBLE FILLER 7-0.6" MA ASSEMBLY DRAWING**

DATE: 03/01/19 DWG: I. Tira / G. Malecki CHK: SI APP: SI

THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.

REV.	DATE	NAME	CHKD.

SCALE: 1:6

DRAWING NUMBER: MA 68 07 100

**DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.**  
POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100  
320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405

**INSTALLATION PROCEDURE:**  
BELOW PROCEDURE IS GENERIC. USERS SHALL REFER TO FDOT STANDARD SPECIFICATIONS AND PROJECT SPECIFIC CRITERIA

- PREASSEMBLE THE MULTI-PLANE ANCHOR, SPIRAL AND PE TRUMPET. USE PREMIUM 100% SILICONE BETWEEN MPA AND TRUMPET TO HAVE A STRONG CONNECTION. GREASE THE BOLTS TO FACILITATE REMOVAL LATER.
- BOLT THE MULTI-PLANE ANCHOR (MPA) WITH PE TRUMPET TO THE POCKET FORMER USING THREADED HOLES IN MPA. THE MPA SHALL BE ORIENTED SUCH THAT THE FLEXIBLE FILLER HOLE POINTS UP. THE SPIRAL SHOULD BE ATTACHED TO ADJACENT REBARS AND ROTATED SUCH THAT IT WON'T INTERFERE WITH 3/4" NPT PIPE ATTACHMENT (IF USING SIDE FLEXIBLE FILLER HOLE IN MPA). ALIGN AXIS OF SPIRAL WITH ANCHOR. USE PLUG TO UNUSED PORT IN MPA AS SHOWN. INSTALL PIPE NIPPLE WITH FOAM INSULATION FOR ANY PIPE NIPPLE CAST IN CONCRETE.
- INSTALL THE DUCT SYSTEM AS SHOWN ON SHOP DRAWINGS. INSERT 2-1/2" IPS DR 17 HDPE PIPE INTO TRUMPET AND HEAT SHRINK. SECURE DUCT PROFILE EVERY TWO FEET.
- PRESSURE TEST DUCT SYSTEM PER FDOT SPECS. EITHER 462-8.2.1.1 OR 462-8.2.1.2 (IF VACUUM ASSISTED FILLER INJECTION WILL BE USED).

**CONCRETING CAN NOW PROCEED**

- AFTER COMPLETION OF CONCRETE PLACEMENT, PROVE THAT THE DUCTS ARE CLEAR OF ANY OBSTRUCTIONS OR DAMAGE. PASS A TORPEDO THROUGH THE DUCT TO DEMONSTRATE.
- PROVE THAT ALL FLEXIBLE FILLER VENTS ARE FREE AND SECURED.
- AFTER THE CONCRETE HAS GAINED STRENGTH, THE STRESSING OPERATION MAY BEGIN.
- INSTALL STRANDS BY PUSHING OR PULLING INDIVIDUALLY OR AS A BUNDLE INTO DUCTS. ALLOW SUFFICIENT TAIL LENGTH FOR STRESSING.
- CHECK THE WEDGE PLATE FOR RUST, DIRT AND GRIT. CLEAN WEDGE HOLES WITH WIRE BRUSH IF NECESSARY. LIGHTLY GREASE OR OIL WEDGE HOLES.
- CHECK WEDGES FOR RUST, DIRT AND GRIT. DISCARD RUSTY WEDGES. USE ONLY CLEAN WEDGES.
- INSTALL WEDGE PLATE, SLIP THE WEDGES OVER THE STRANDS AND LOOSELY SEAT IN WEDGE HOLES.


**STRESSING CAN PROCEED WHEN CONCRETE STRENGTH HAS REACHED MIN. COMPRESSIVE STRENGTH REQUIRED IN CONTRACT DRAWING NOT LESS THAN 4000 PSI.**

- AFTER THE STRESSING OPERATION IS COMPLETED AND THE ELONGATIONS FALL WITHIN ±7%, OBTAIN APPROVAL FROM THE ENGINEER TO CUT THE STRAND TAILS APPROXIMATELY 3/4" AWAY FROM THE WEDGES.
- EVALUATE STRESSING OPERATION IF ELONGATIONS FALL OUTSIDE THE 7% LIMIT.
- INSTALL GROUT CAP WITH O-RING USING SIX BOLTS. CONNECT 1/2" PIPE NIPPLE IN PORT TO BE USED, INSERT DRILL BIT INTO PIPE NIPPLE AND DRILL 1/2" HOLE IN CAP USING SAW BIT OR SPADE BIT (BY OTHERS) TO PREVENT DAMAGE TO THREADS.
- CONNECT THE 3/4" NPT PIPE NIPPLE ASSEMBLY INTO THE FRONT PORT OF THE MPA.
- THREAD 1/2" NPT PIPE NIPPLE ASSEMBLY INTO THE THREADED PORTS PROVIDED IN THE GROUT CAP. THIS PORT CAN BE USED AS AN INJECTION VENT ONLY. USE A PLUG TO SECURE THE PORT AFTER INJECTION.
- PRESSURE TEST DUCT SYSTEM PER FDOT SPECS. 462-8.2.2.


**FLEXIBLE FILLER OPERATION CAN NOW PROCEED**

- REMOVE FLEXIBLE FILLER PORT PIPES AND INSTALL PLUGS.


**NOTES:**  
1. OTHER REINFORCEMENT NOT SHOWN FOR CLARITY.  
2. USE TEFLON TAPE FOR ALL PIPE NIPPLE, PLUG AND VALVE CONNECTIONS.

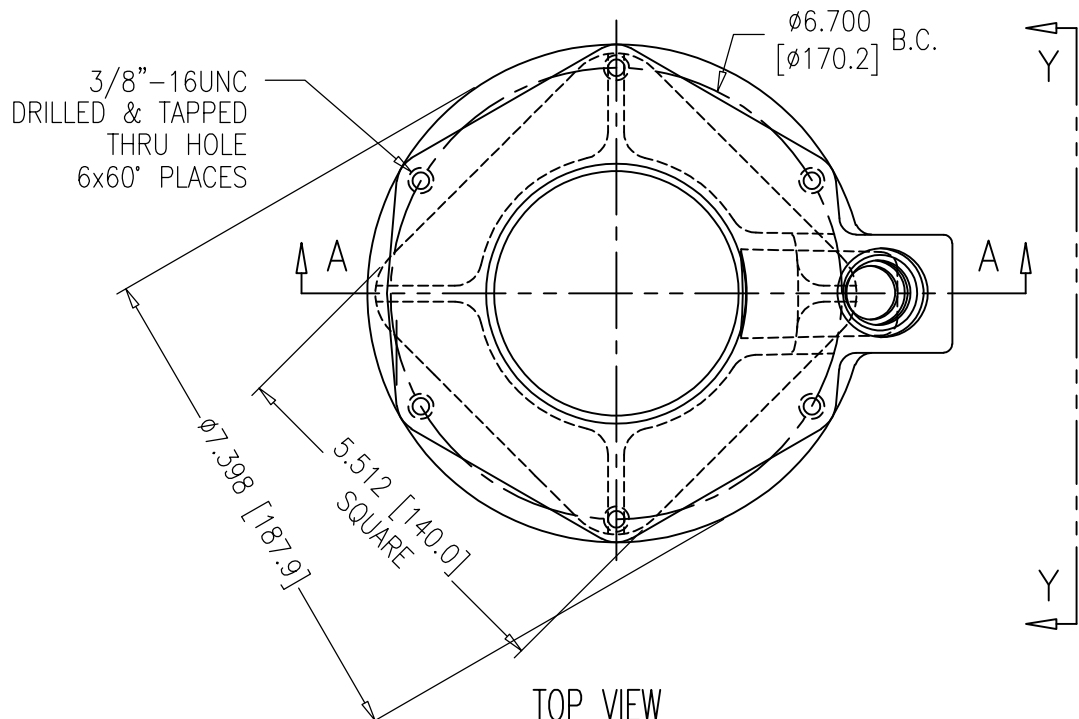

TOP VIEW

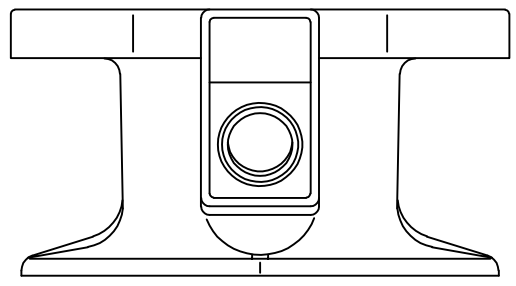


VIEW Y-Y

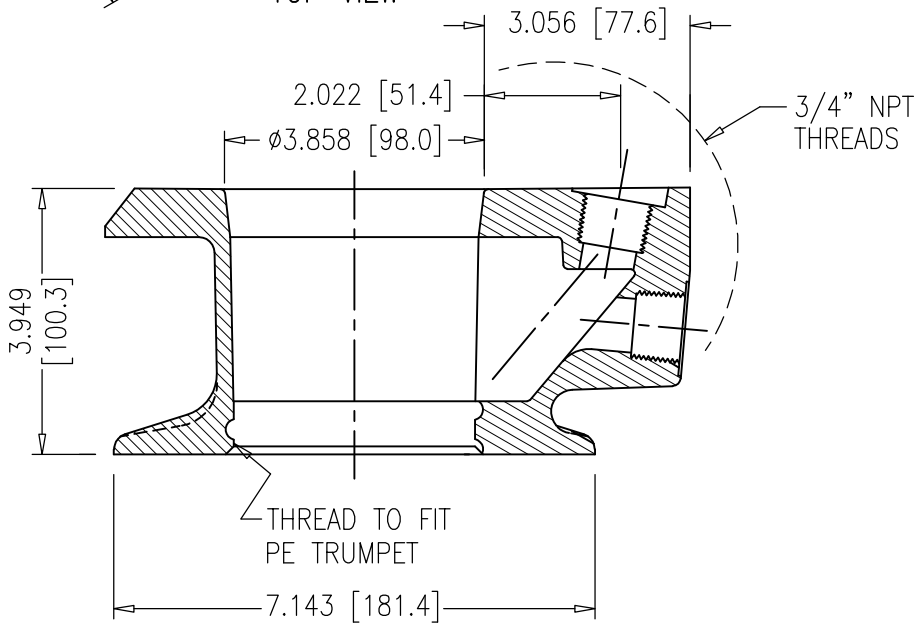

SECTION A-A


- NOTES FOR GALVANIZING PARTS:
1. AFTER CASTING IS STRIPPED, GRIND AND TOUCH UP TOP AND BOTTOM SURFACES AS NECESSARY TO ELIMINATE ANY PARTING LINES OR UNEVEN AREAS.
  2. GALVANIZE ACCORDING TO ASTM A123 AND TAKE CARE HOW CASTINGS ARE STORED TO PREVENT RUST.
  3. DRILL & TAP BOLT HOLES AND GROUT PORTS AND MACHINE GROOVE IN BOTTOM OF ANCHOR USING A WATER BASED CUTTING FLUID AND SPRAY THEM WITH ZINC RICH PAINT ACCORDING TO ASTM A780, ENSURE THREADABILITY.

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		TOLERANCES: ±.020 UNLESS NOTED		WEIGHT 10 LBS.		REV.	DATE	NAME	PART NUMBER: <b>68 07 248</b>	
<b>7-0.6"/9-0.5" MULTI-PLANE ANCHOR WITH TWO GROUT PORTS - GALV.</b>				MATERIAL: DUCTILE IRON 65-45-12 ASTM A536		SCALE 1:3					DRAWING NUMBER: <b>68 07 216</b>	
DATE: 10-13-04	DWG: G. MALECKI	CHK: H.K.	APP: K.S.	THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY <b>DSI's</b> SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.								
<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100      FAX: 630-739-1405										<b>DYWIDAG</b>		

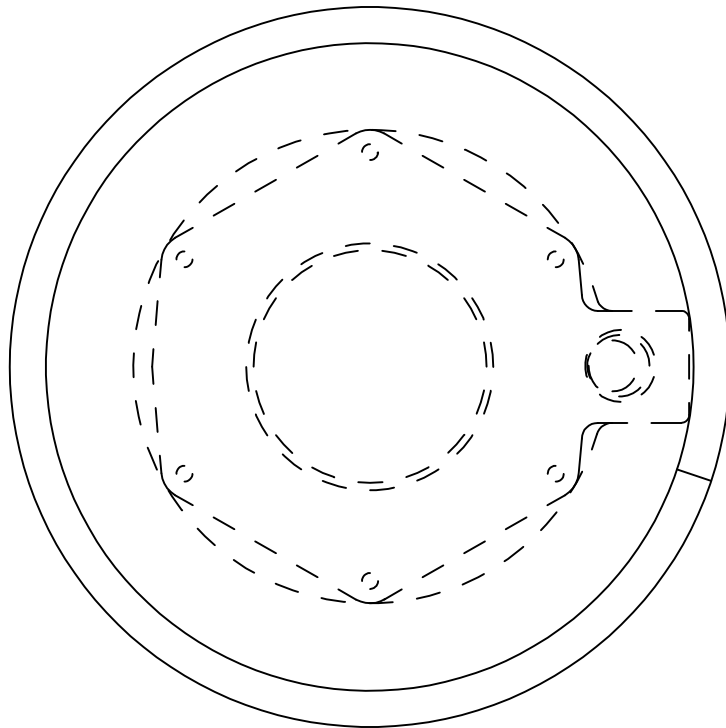

NOTES:




1. SPIRAL IS MADE FROM STANDARD #4 REBAR, NO PART NUMBER MARKING IS SHOWN.
2. KEEP SPIRAL AND MPA AXIS ALIGNED, IF USING SIDE PORT, ROTATE SPIRAL TO CLEAR.

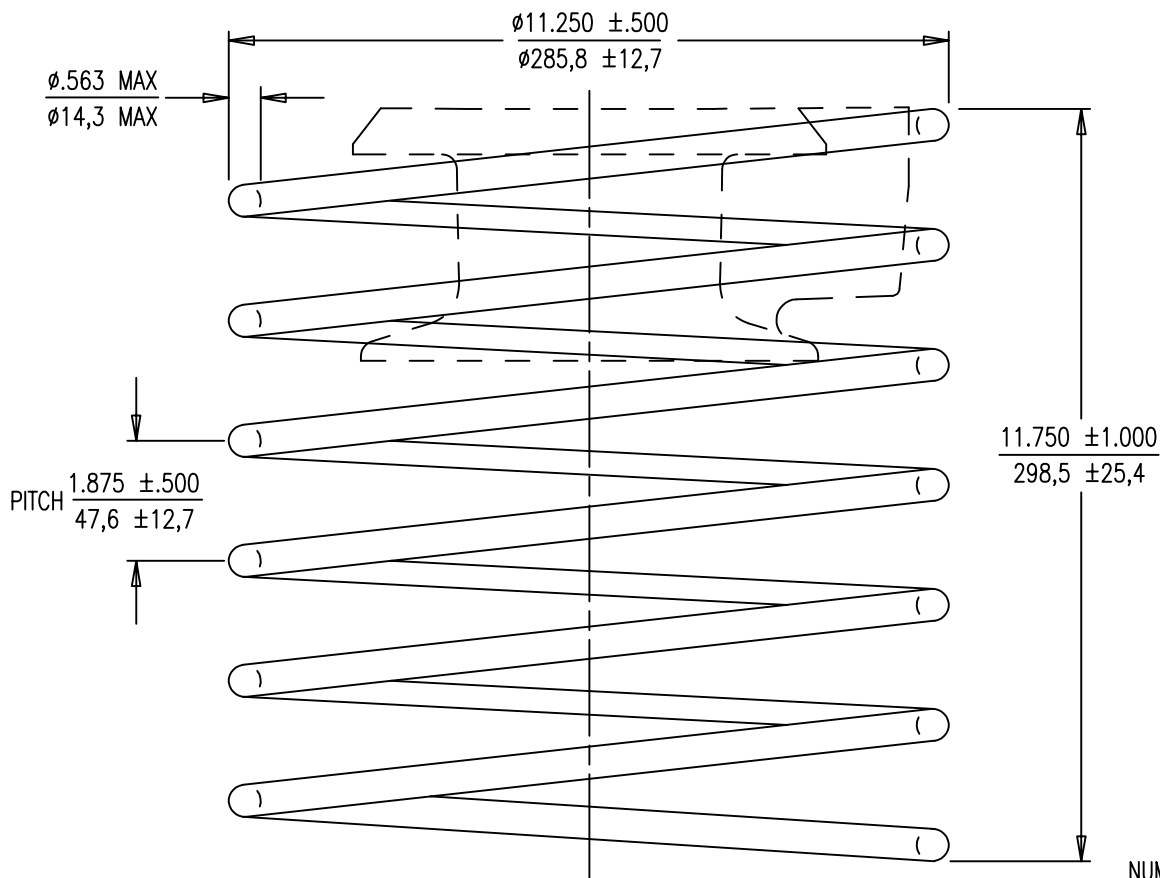


NUMBER OF TURNS: 6  
 REBAR LENGTH: 16'-11".  
 WEIGHT: 11.3 LBS.

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: QS60021400A		TOLERANCES: ±.020 UNLESS NOTED	WEIGHT 11.3 LBS.	REV.	DATE	NAME	PART NUMBER: 68 07 254
<b>STANDARD SPIRAL FOR 7-0.6"/9-0.5" MPA</b>				MATERIAL: ASTM A615 SIZE #4, GR 60	SCALE 1:3				DRAWING NUMBER: 68 07 254
				DATE: 01-19-07	DWG: G. MALECKI	CHK: S.Y.	APP: K.S.		
<p>THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.</p> <p><b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b>        320 MARMON DRIVE - BOLINGBROOK, IL 60440        PHONE: 630-739-1100 FAX: 630-739-1405</p>									



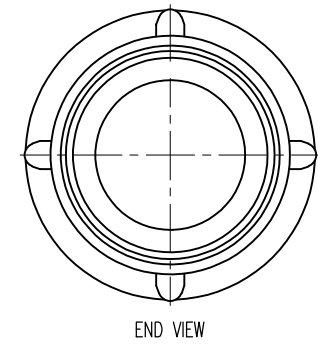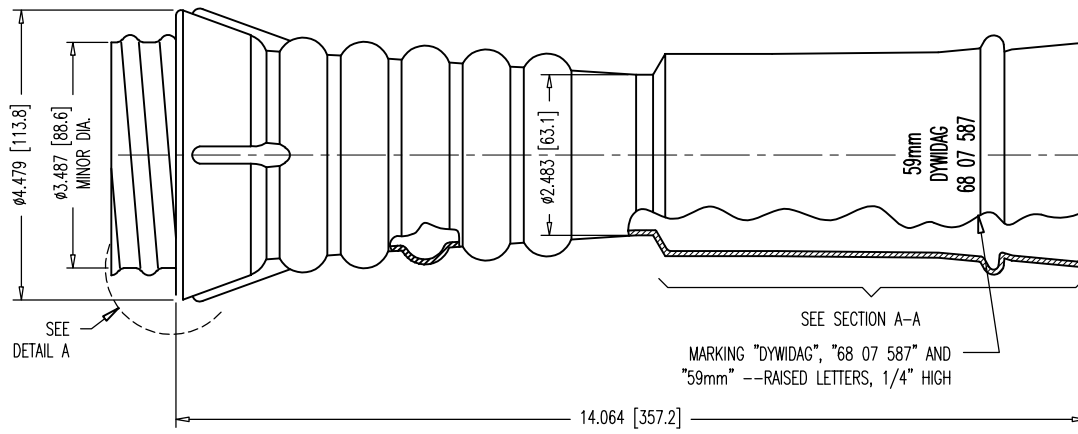



DETAIL A  
 THREAD FITS INTO 7-0.6" MPA CASTING

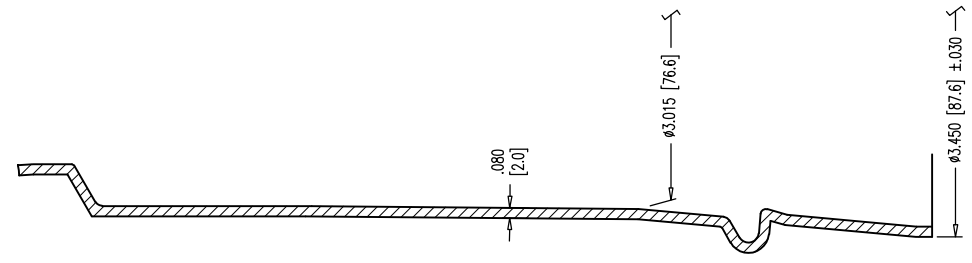

SECTION A-A

- MATERIAL SPECIFICATIONS:**
1. MEETS REQUIREMENTS OF ASTM D3350 WITH A MINIMUM CELL CLASS OF 445574C.
2. CONTAINS ANTIOXIDANTS WITH A MINIMUM OXIDATIVE-INDUCTION TIME (OIT) ACCORDING TO ASTM D3895 OF 40 MINUTES.
3. REMOLDED FINISHED MATERIAL HAS A MINIMUM FAILURE TIME OF 24 HOURS WHEN TESTED FOR STRESS CRACK RESISTANCE USING ASTM F2136 AT AN APPLIED STRESS OF 600 PSI.


DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: Q980058800P		TOLERANCES: ±.020 UNLESS NOTED	WEIGHT	REV. DATE NAME	PART NUMBER:												
<b>7-0.6" TRUMPET FOR MPA TO 59mm PP DUCT OR 2.5" HDPE PIPE</b>				MATERIAL: SEE ABOVE	SCALE 1:2 1:1	<table border="1"> <tr><td>Δ</td><td>01-11-19</td><td>S.I.</td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </table>	Δ	01-11-19	S.I.										<b>68 07 587</b>
Δ	01-11-19	S.I.																	
DATE: 10-16-08	DWG: G. MALECKI	CHK: E.A.	APP: K.S.				DRAWING NUMBER: <b>68 07 587</b>												
<small>THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.</small>				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100 320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405															

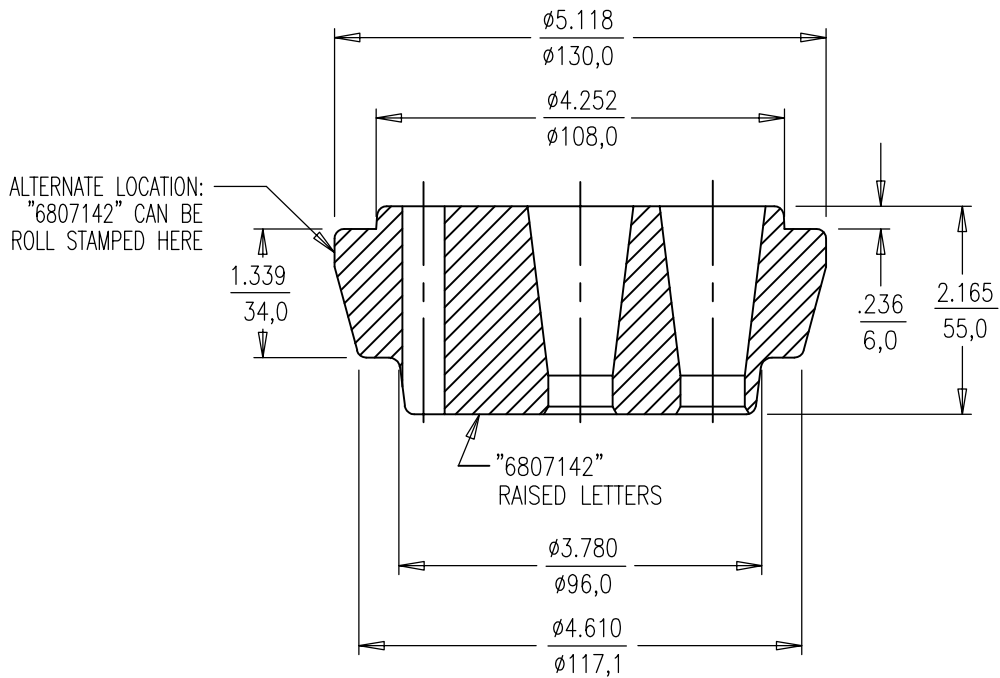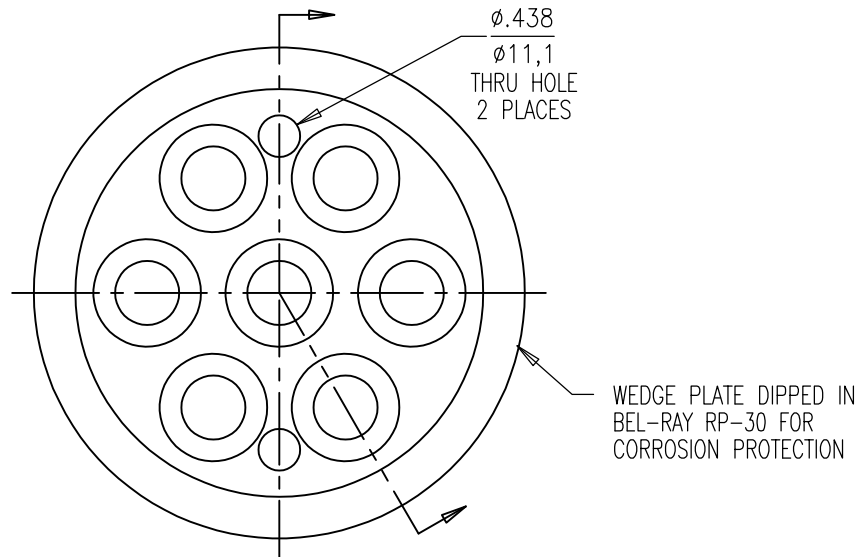


**NOTES:**

1. BREAK EDGE OF WEDGE HOLES.
2. USE 3-PART WEDGE P/N 68 00 0536.
3. FOR FORGING BLANK SEE 68 07 142 91.


DIMENSIONS: INCH/mm mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: QS00014200F		TOLERANCES: $\pm .020$ UNLESS NOTED	WEIGHT 7.5 LBS.	REV.	DATE	NAME	PART NUMBER: <b>68 07 142</b>
<b>7-0.6" FORGED WEDGE PLATE</b>				MATERIAL: STEEL FORGING NORMALIZED ASTM A521	SCALE 1:2				DRAWING NUMBER: <b>6807142</b>
				DATE: 05/02/92	DWG: G. MALECKI	CHK:	APP: KL		
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC. 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100					
				FAX: 630-739-1405					

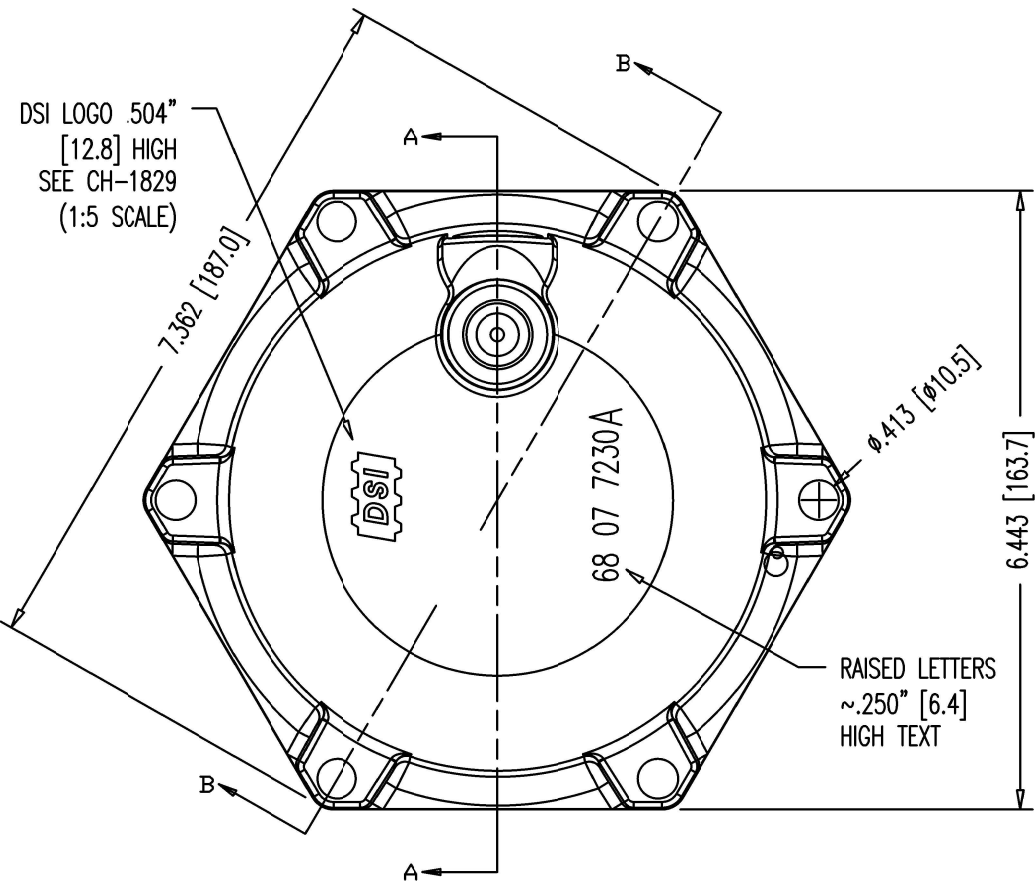

TOP VIEW

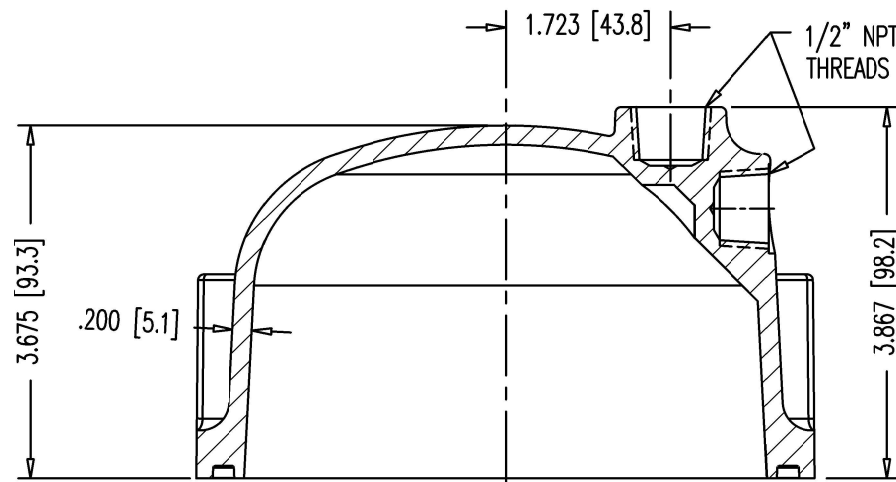


SECTION A-A

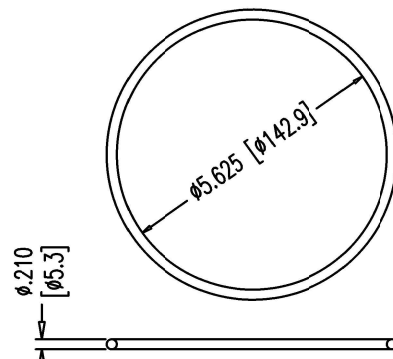



O-RING MATERIAL:  
 HNBR, MEETING FDOT  
 SPECIFICATIONS 960-2.2.1.7.

#358 O-RING  
 5-5/8" x 6" x 3/16"  
 SCALE: NTS

B36E50700

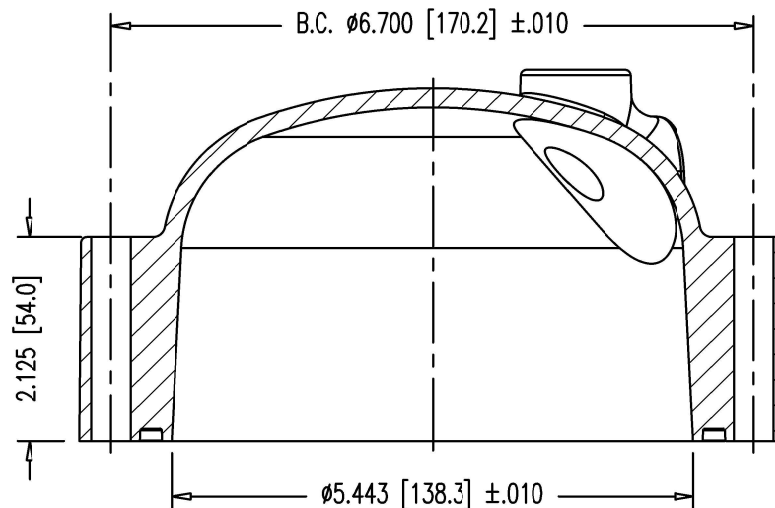

SECTION B-B

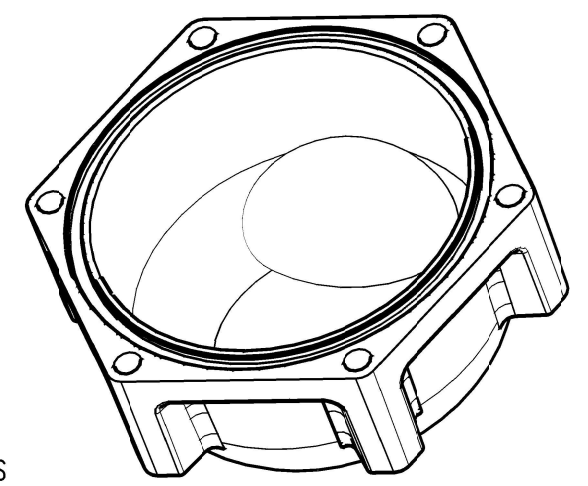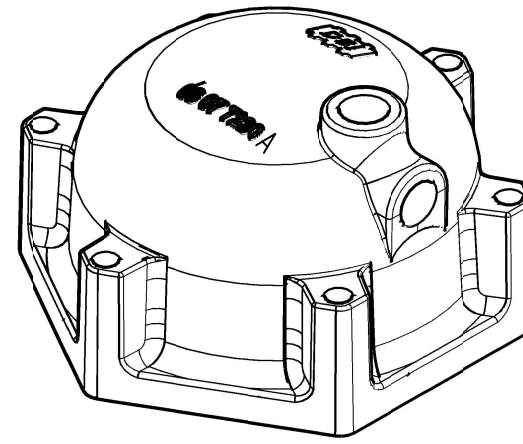



SCALE: NTS

NOTES:

1. USE 3/8"-16UNC 316L S.S. HEX BOLTS, 2-3/4" LONG W/SMALL DIA. WASHER.
2. INSTALL O-RING IN GROOVE USING DROPS OF LIQUID ADHESIVE BEFORE SHIPPING. DON'T USE EXCESSIVE ADHESIVE. O-RING MUST STAY IN PLACE UNTIL INSTALLATION.
3. THE NYLON CONFORMS TO ASTM D5989, WITH CELL CLASSIFICATION S-PA0401 (ULTIMATE STRENGTH 10,000 PSI MIN., WITH UV STABILIZER ADDED).
4. DRILL 1/2" [12.7] HOLE IN PORT BEING USED -CAUTION-RECOMMEND USING HOLE SAW BIT OR SPADE BIT (BY OTHERS), BE CAREFULL TO PREVENT DAMAGE TO THREADS OR CAP.
5. WHEN PRESSURIZING GROUT CAPS, DO NOT STAND BEHIND CAPS!

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: QS60072300P		TOLERANCES: ±.020 UNLESS NOTED	WEIGHT 1.12 LBS.	REV. A	DATE 03/29/19	NAME S.I.	PART NUMBER: 68 07 7230A
<b>7-0.6" NYLON CAP WITH O-RING FOR FLEXIBLE FILLER</b>				MATERIAL: NYLON 6, 20% GLASS FIBER FILLED	SCALE 1:2 UNLESS NOTED				DRAWING NUMBER: 68 07 7230A
DATE: 11-07-03	DWG: G. MALECKI	CHK: E.A.	APP: K.S.	THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.					



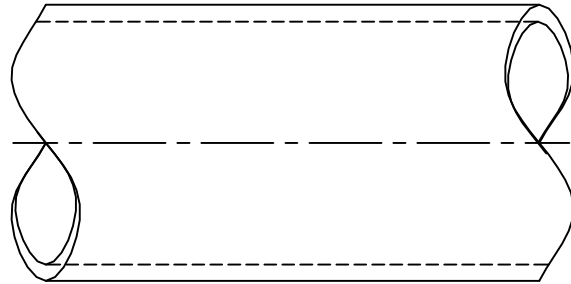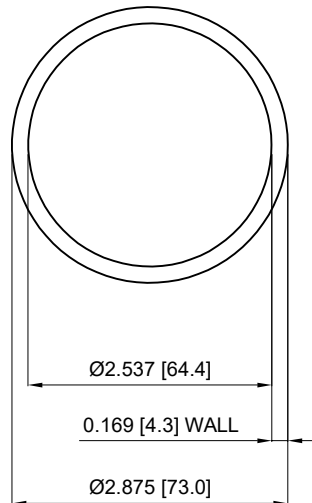


**MATERIAL:** 2 1/2" IPS DR 17 HDPE PIPE.

**SPECIFICATIONS:**


1. PIPE SHALL BE OF HIGH-DENSITY POLYETHYLENE AND SHALL HAVE A MAXIMUM DIMENSION RATIO (DR) OF 17 AS ESTABLISHED BY EITHER ASTM D3035 OR ASTM F714, AS APPROPRIATE FOR MANUFACTURING PROCESS USED.
2. PIPE SHALL HAVE A MINIMUM PRESSURE RATING OF 125 PSI.
3. MEETS REQUIREMENTS OF ASTM D3350 WITH A MINIMUM CELL CLASS OF 445574C.
4. CONTAINS ANTIOXIDANTS WITH A MINIMUM OXIDATIVE-INDUCTION TIME (OIT) ACCORDING TO ASTM D3895 OF 40 MINUTES.
5. REMOLDED FINISHED MATERIAL HAS A MINIMUM FAILURE TIME OF THREE HOURS WHEN TESTED FOR STRESS CRACK RESISTANCE USING ASTM F2136 AT AN APPLIED STRESS OF 348 PSI.
6. MINIMUM BEND RADIUS = 20 FT.

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		TOLERANCES:	WEIGHT	REV.	DATE	DWG.	CHK.	PART NUMBER
<b>2-1/2" SMOOTH HDPE PIPE FOR FLEXIBLE FILLER TENDON</b>				UNLESS NOTED	0.63 LBS./FT.					<b>U00055107</b>
				MATERIAL SEE ABOVE	SCALE 1 : 2					DRAWING NUMBER: <b>U00055107</b>
DATE: 02/27/19	DWG: I. TIRA	CHK: SI	APP: SI							
<small>THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.</small>				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100 320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405						



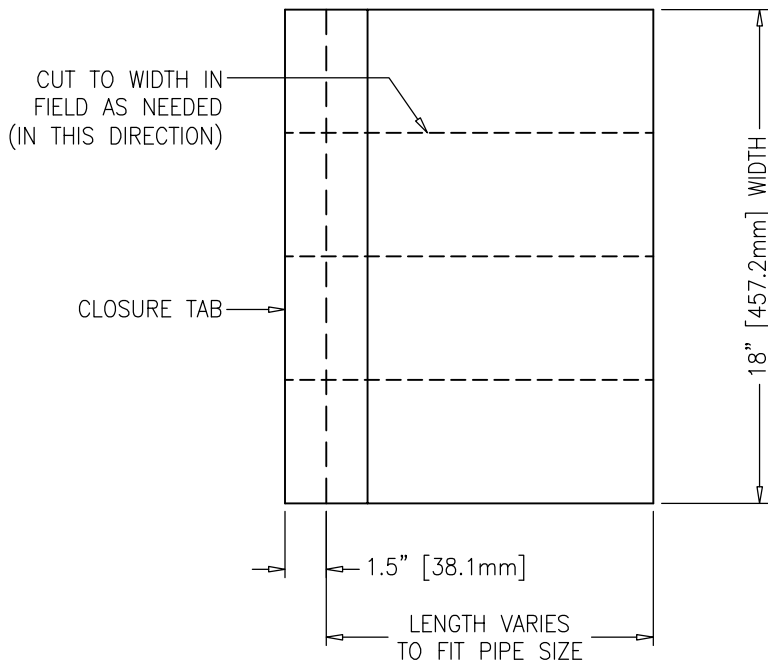

**TOP VIEW**

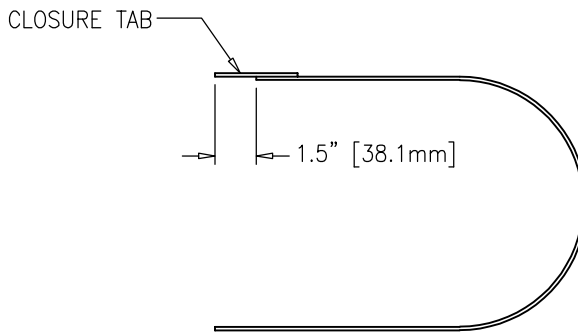

**END VIEW**  
(NOT TO SCALE)


NOTE:  
FOLLOW MANUFACTURER'S  
INSTALLATION INSTRUCTIONS.

PIPE SIZE	STRAND SYSTEM	BAR SYSTEM	HEAT SHRINK SLEEVE SIZE	PART NUMBER
2 1/2" IPS DR 17	7-0.6"	1", 1 1/4", 1 3/8"	KLNN/L 63-450 BK	U00039063
3" SDR 17	12-0.6"	1 3/4", 1 3/8"	KLNN/L 90-450 BK	U00039090
4" SDR 17	19-0.6"	2 1/2", 3"	KLNN/L 115-450 BK	U00039115
5" SDR 17	27-0.6" & 31-0.6"		KLNN/L 125-450 BK	U00039125




DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		REV.		DATE		NAME		PART NUMBERS:			
<b>KLNN HEAT SHRINK SLEEVE</b>				MATERIAL: POLYOLEFIN MEETS FDOT SPECS 960-2.2.1.8 FOR FLEXIBLE FILLER		SCALE XX		1		05-28-20		SI	
								DRAWING NUMBER: <b>U00039000</b>					
DATE: 02-21-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I.	THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL,          USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.									
				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100 FAX: 630-739-1405				<b>DYWIDAG</b>					





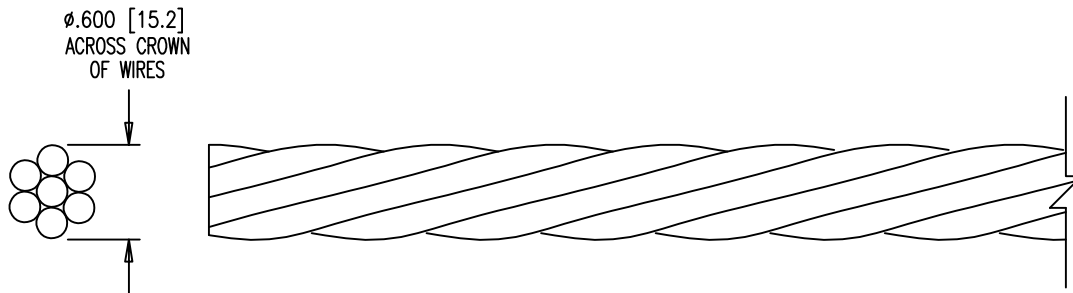

- NOTES:
1. NO PART NUMBER OR IDENTIFICATION MARKS ON STRAND.
  2. RUST PRODUCING VISIBLE PITTING TO THE UN-AIDED EYE IS NOT ALLOWED.

MATERIAL:  
0.6" 270 KSI LOW RELAX STRAND  
ASTM A416

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: QS000301000		TOLERANCES: ±.020 UNLESS NOTED	WEIGHT .738 PER/FT	REV.	DATE	NAME	PART NUMBER: 301060	
<b>0.6" BARE 270 KSI STRAND</b>				MATERIAL: SEE ABOVE	SCALE 1:1				DRAWING NUMBER: 301060	
				DATE: 02-18-19	DWG: G. MALECKI	CHK: C.S.	APP: K.S.			
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC. 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100 FAX: 630-739-1405						

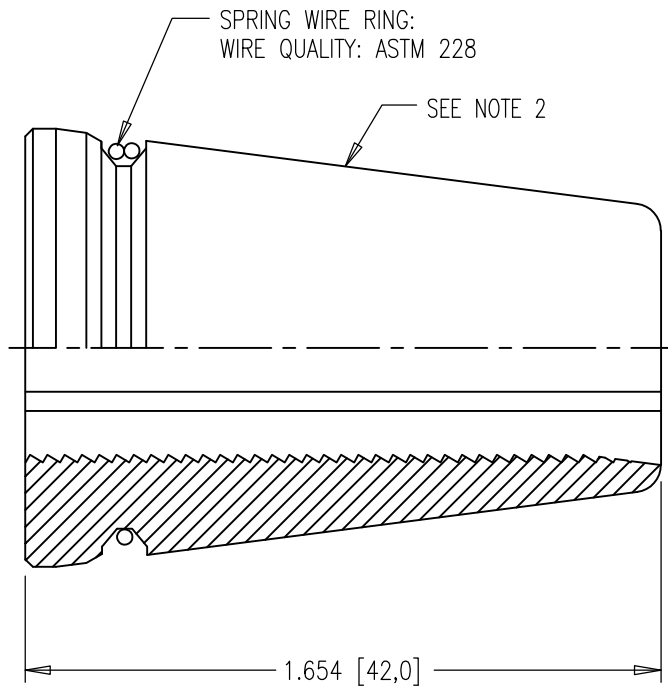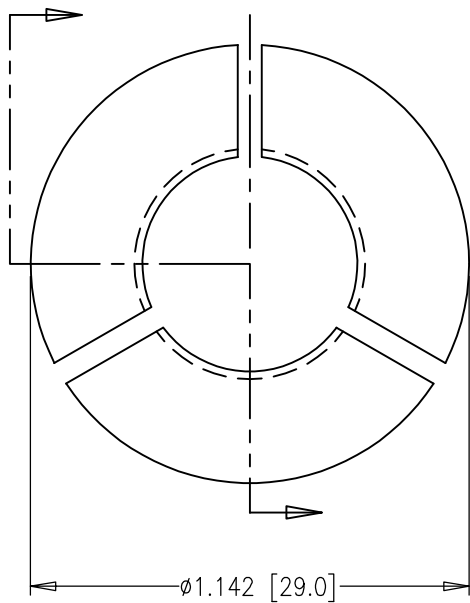

**NOTES:**

1. SHARP EDGES MUST BE BROKEN.
2. VIBRATE TO SURFACE FINISH OF 63  $\mu$ IN. MAX.
3. DIP IN SQ70 OIL OR EQUIV. FOR CORROSION PROTECTION.
4. MAKE SURE THAT THE BUTTRESS THREAD IS ORIENTED IN THE DIRECTION SHOWN ON THIS DRAWING.
5. NO STAMPED PART NUMBER


MATERIAL:  
12L14  
ALL HARDENED

DIMENSIONS: INCH/mm mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: QS00000500D		TOLERANCES: $\pm 0.010$ ; $\pm 2^\circ$ UNLESS NOTED	WEIGHT 0.19 LBS.	REV.	DATE	NAME	PART NUMBER: 68 00 0536
<b>3-PART WEDGE FOR 0.6" STRAND</b>				MATERIAL: SEE ABOVE	SCALE 2:1				DRAWING NUMBER: 68 00 0536
				DATE: 06-01-18	DWG: G. MALECKI	CHK: C.S.	APP: S.I.		


THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.

**DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.**  
POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100  
320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405




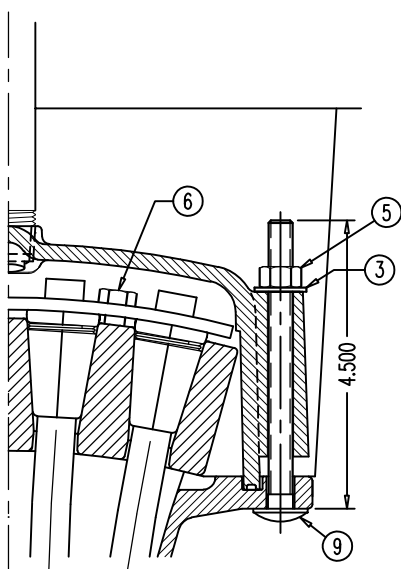


KEEPER PLATE 68 04 2637 ON  
WEDGE PLATE 68 04 2534A &  
NYLON CAP 68 04 2539 ON  
FLAT ANCHOR 68 04 2548

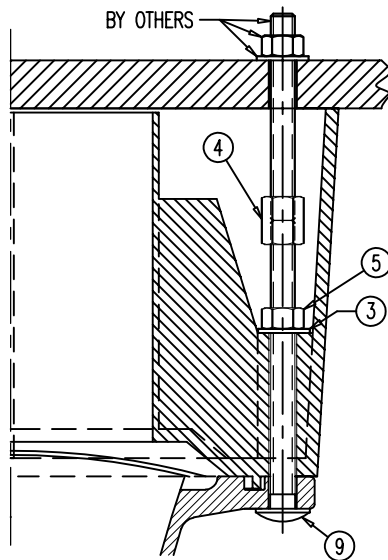


POCKET FORMER 68 04 2640  
ON FLAT ANCHOR 68 04 2548

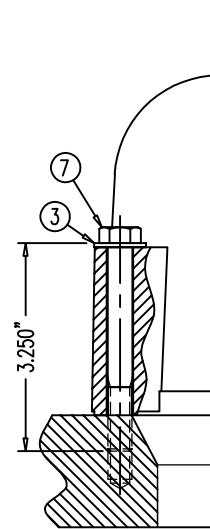


NYLON BAR CAP B36E50700 OR 50700A  
ON GALV. BEARING PLATE  
B26E22510, 22610, 22700, 22800,  
B32E22510, 22610, 22700, 22800,  
B36E22410, 22420, 22910, 22510,  
22610, 22700, 22800 & NYLON  
BAR CAP B66E50700 OR 50700A  
ON GALV. BEARING PLATE B66E22700

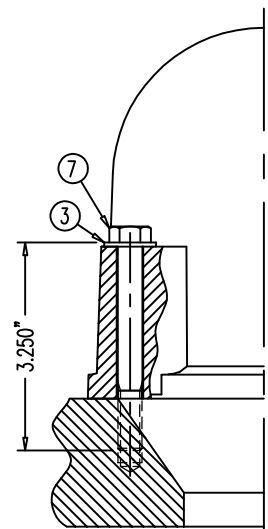


NYLON BAR CAP  
B46M50700  
OR 50700A  
ON GALV.  
BEARING PLATE  
B46E22700 &  
B46E22800

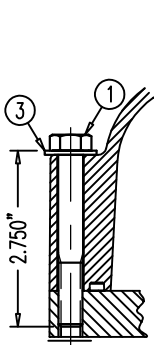


NYLON CAP  
68 07 7230 OR 7230A  
ON MPA 68 07 248




NYLON CAP  
68 12 7230 OR 7230A  
ON MPA 68 12 248




NYLON CAP  
68 19 7230 OR 7230A  
ON MPA 68 19 248

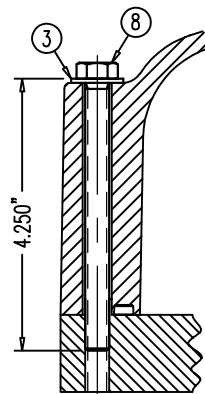

NYLON CAP  
68 27 7230 OR 7230A  
ON MPA 68 27 248

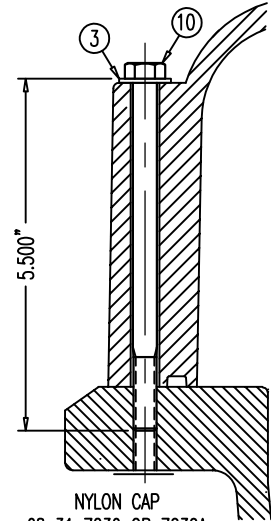

NYLON CAP  
68 31 7230 OR 7230A  
ON MPA 68 31 248



TYPE A NARROW WASHER  
FOR 3/8"-UNC BOLT

NOTE:  
THE 316L S.S. BOLTS ARE SPECIAL ORDER.  
ALL WASHERS, HEX NUTS & COUPLERS HAVE  
NO MARKINGS.

POS.	PART NUMBER	DISCRIPTION (ALL PARTS 316L STAINLESS STEEL UNLESS NOTED)
①	00 00 771	3/8"-16UNC HEX BOLT, 2-3/4" LONG (1" LONG THREAD)
②	00 00 772	3/8"-16UNC HEX BOLT, 3-1/2" LONG (1" LONG THREAD)
③	00 00 774	TYPE A NARROW WASHER FOR 3/8"-UNC BOLT
④	00 00 776	3/8"-16UNC COUPLER, ZINC COATED
⑤	00 00 777	3/8"-16UNC HEX NUT
⑥	00 00 778	5/16"-18UNC HEX BOLT, 7/8" LONG, ZINC PLATED
⑦	00 00 783	3/8"-16UNC HEX BOLT, 3-1/4" LONG (1" LONG THREAD)
⑧	00 00 784	3/8"-16UNC HEX BOLT, 4-1/4" LONG (FULL THREAD)
⑨	00 00 789	3/8"-16UNC CARRIAGE BOLT, 4-1/2" LONG
⑩	00 00 790	3/8"-16UNC CARRIAGE BOLT, 5-1/2" LONG

DIMENSIONS: INCH

QUALITY PLAN NUMBER:

## STAINLESS STEEL 316L BOLTS AND WASHER FOR NYLON CAPS

DATE: 09-10-04 DWG: G. MALECKI CHK: E.A. APP: K.S.

THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.

SCALE  
1:3


REV.	DATE	NAME	NAME
1	05/01/19	S.I.	
2	05/28/20	S.I.	

PART NUMBERS:  
SEE TABLE

DRAWING NUMBER:  
00 00 770

DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.  
POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100  
320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405





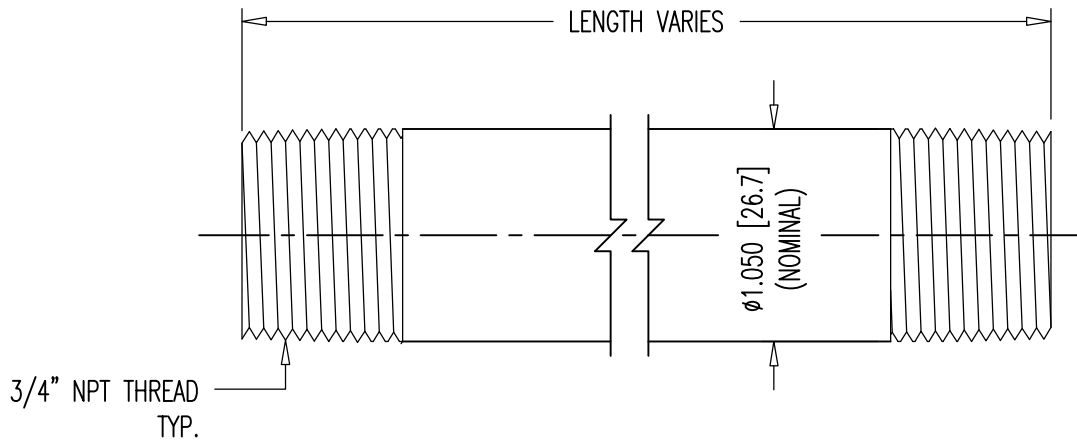

PRESSURE RATED: 150 PSI


DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY	QUALITY PLAN NUMBER: Q00000020P			REV.	DATE	NAME	ECRN	PART NUMBER: <b>00 00 878</b>	
<b>3/4" NPT PIPE NIPPLES</b>		MATERIAL: SCH 40 BLACK WELDED STEEL	SCALE 1:1					DRAWING NUMBER: <b>00 00 878</b>	
DATE: 01-29-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I.						
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY <b>DSI's</b> SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100      FAX: 630-739-1405				<b>DYWIDAG</b>	

3/4" NPT, 14 THREADS PER INCH,  
0.55" THREAD ENGAGEMENT

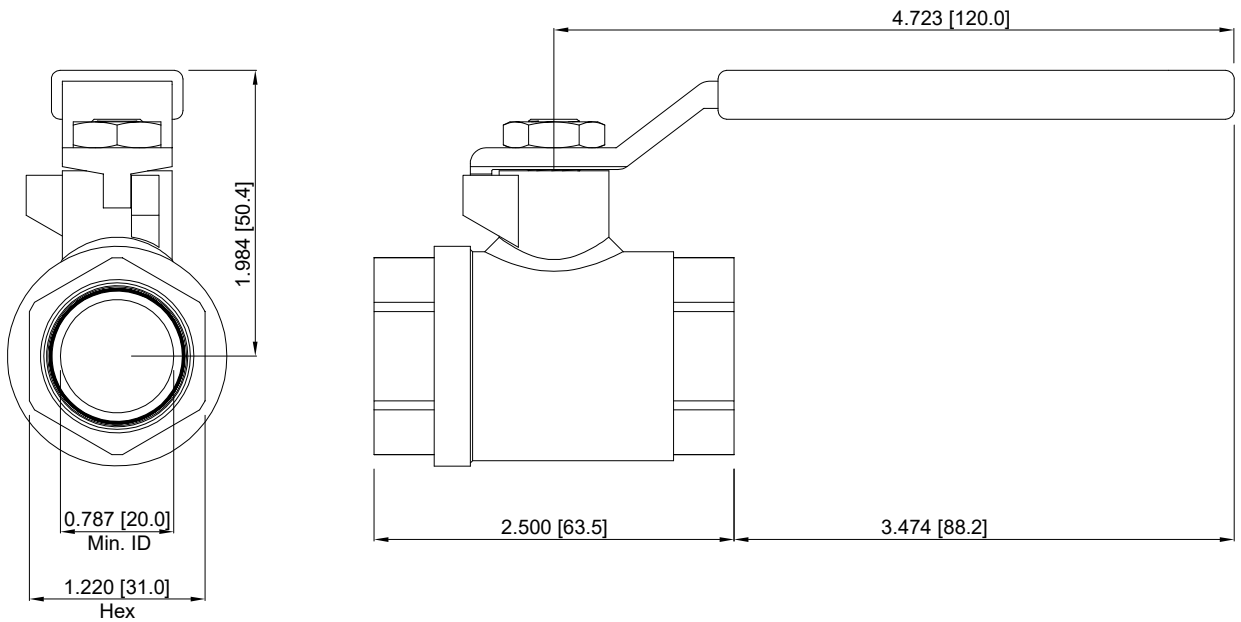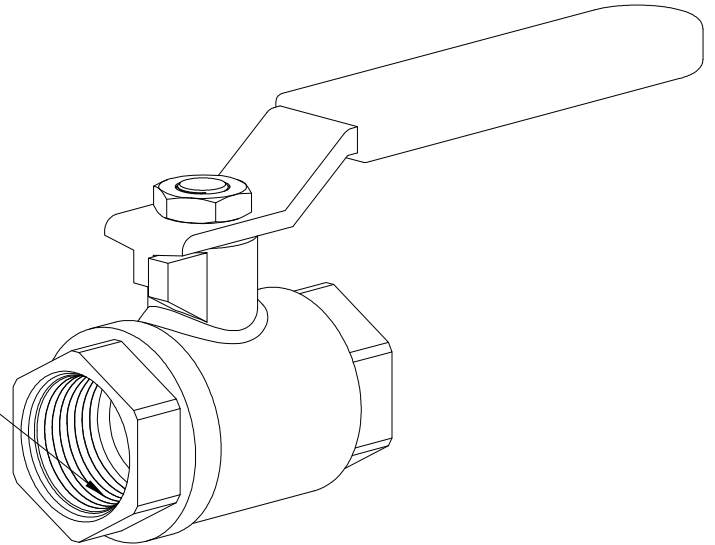

PRESSURE RATED: 150 PSI


DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		WEIGHT	REV.	DATE	NAME	PART NUMBER
<b>3/4" BALL VALVE</b>				0.77 LBS.				<b>00 00 838</b>
				MATERIAL: BRASS	SCALE 3/4" = 1"			
DATE: 02/08/19	DWG: I. TIRA	CHK: SY	APP: SE					
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100 <b>DYWIDAG</b> 320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405				

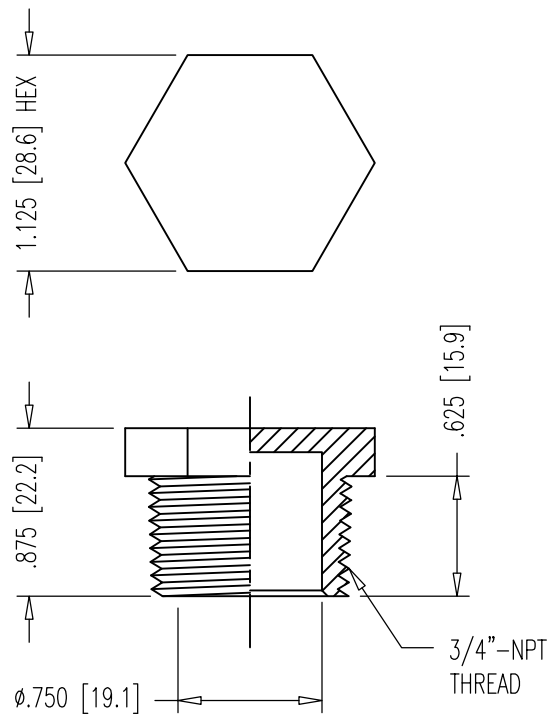


PRESSURE RATED: 150 PSI

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		WEIGHT .009 LBS.	REV.	DATE	NAME	PART NUMBER: <b>00 00 849</b>
<b>3/4" NPT NYLON PLUG</b>								
				DATE: 03-12-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I..	DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC. 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100      FAX: 630-739-1405
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY <b>DSI's</b> SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.								





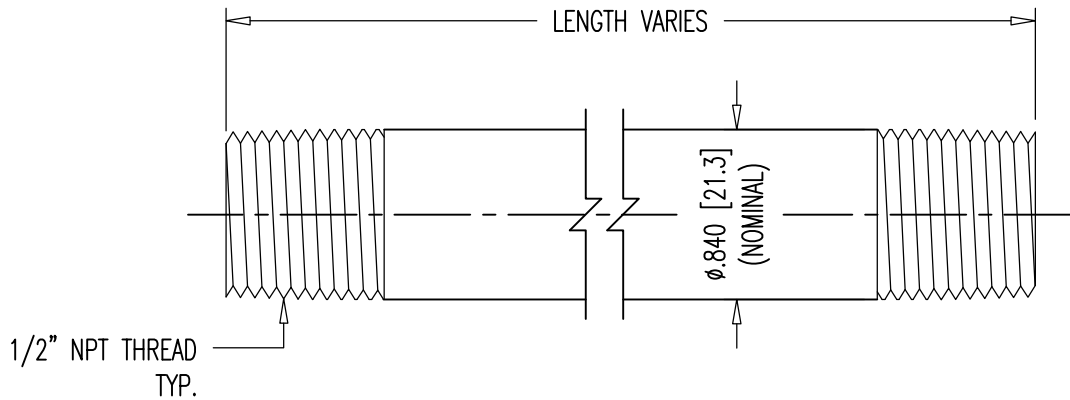

PRESSURE RATED: 150 PSI

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: Q00000020P		REV.	DATE	NAME	PART NUMBER: <b>00 00 678</b>
<b>1/2" NPT PIPE NIPPLES</b>				MATERIAL: SCH 40 BLACK WELDED STEEL	SCALE 1:1		DRAWING NUMBER: <b>00 00 678</b>
DATE: 01-29-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I.				
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY <b>DSI's</b> SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100      FAX: 630-739-1405			


1/2" NPT, 14 THREADS PER INCH,  
0.53" THREAD ENGAGEMENT

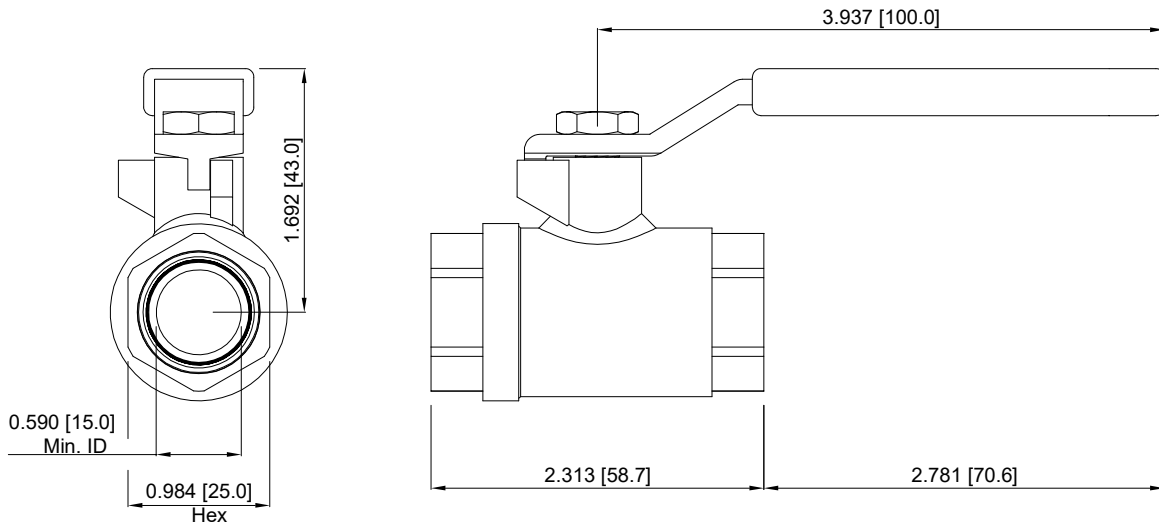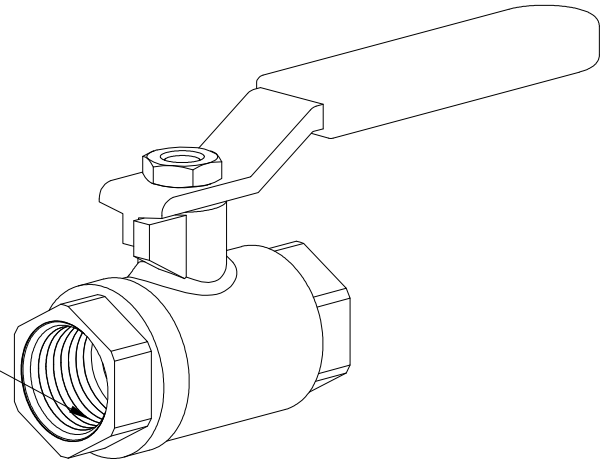


PRESSURE RATED: 150 PSI


DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		WEIGHT -- LBS.	REV.	DATE	NAME	PART NUMBER
<b>1/2" BALL VALVE</b>					SCALE 3/4" = 1"			
				DATE: 02/08/19		DWG: I. TIRA	CHK: SI	APP: SI
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100 <b>DYWIDAG</b> 320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405				



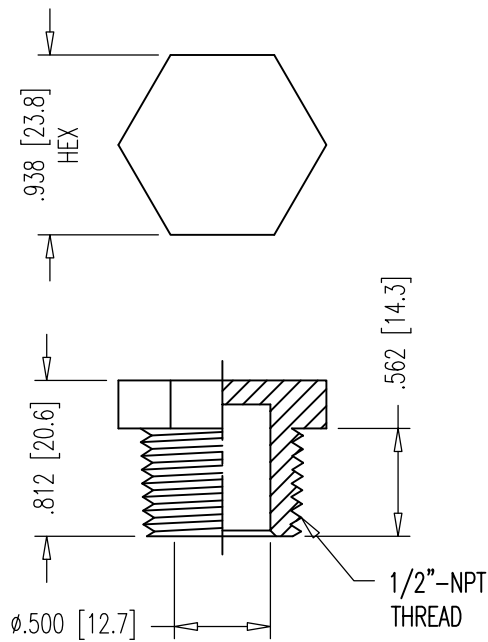


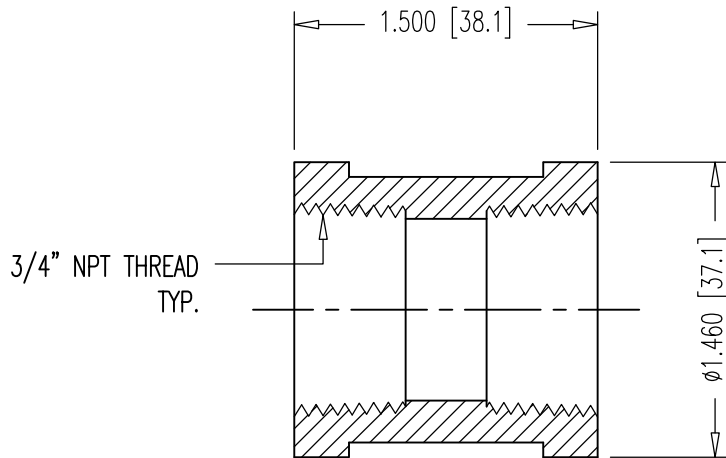
PRESSURE RATED: 150 PSI

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		WEIGHT .006 LBS.	REV.	DATE	NAME	ECRN	PART NUMBER: <b>00 00 649</b>
<b>1/2" NPT NYLON PLUG</b>					MATERIAL: NYLON 6				
				DATE: 03-12-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I.	SCALE 1:1	
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY <b>DSI's</b> SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100      FAX: 630-739-1405			<b>DYWIDAG</b> 		

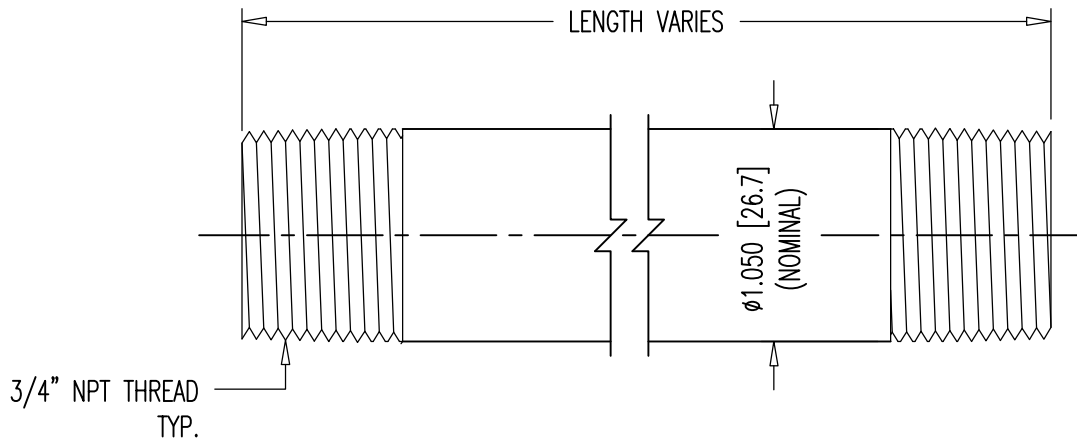


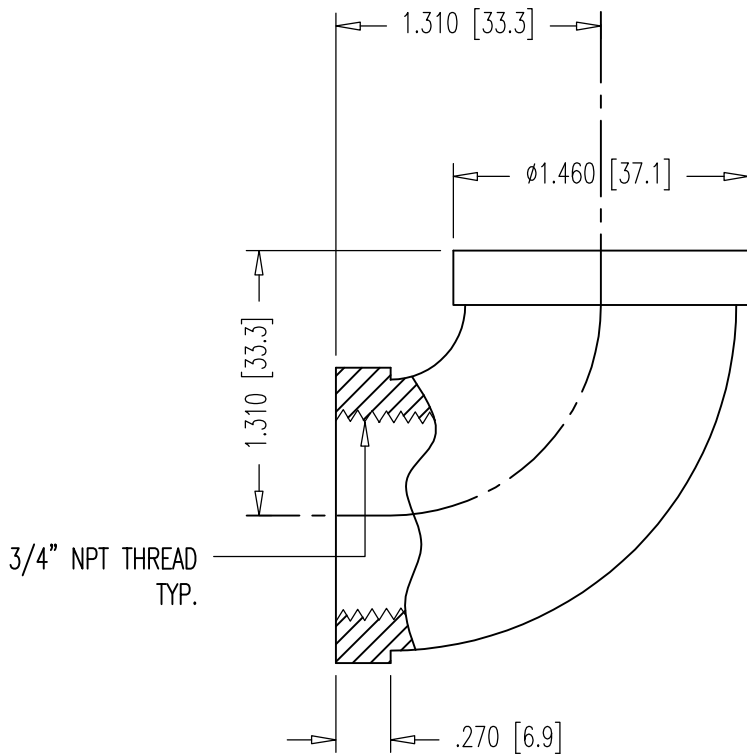
PRESSURE RATED: 150 PSI

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: Q00000020P		REV.	DATE	NAME	ECRN	PART NUMBER: <b>00 00 878</b>
<b>3/4" NPT PIPE NIPPLES</b>				MATERIAL:	SCALE			
				SCH 40			1:1	
DATE: 01-29-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I.	BLACK WELDED				DRAWING NUMBER: <b>00 00 878</b>
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100      FAX: 630-739-1405		<b>DYWIDAG</b> 		




PRESSURE RATED: 150 PSI

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: Q000000020P		REV.	DATE	NAME	ECRN	PART NUMBER: <b>00 00 881</b>
<b>3/4" NPT FEMALE COUPLER</b>				MATERIAL:	SCALE 1:1			
				DATE: 02-05-19   DWG: G. MALECKI   CHK: S.I.   APP: S.I.				
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100      FAX: 630-739-1405				



PRESSURE RATED: 150 PSI

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER: Q00000020P		REV.	DATE	NAME	ECRN	PART NUMBER: <b>00 00 880</b>
<b>3/4" NPT 90° ELBOW, FEMALE-FEMALE</b>				MATERIAL:	SCALE			
				SCH 40			1:1	
DATE: 05-01-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I.					DRAWING NUMBER: <b>00 00 880</b>
THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF <b>DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.</b> THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY <b>DSI's</b> SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.				<b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b> 320 MARMON DRIVE - BOLINGBROOK, IL 60440 PHONE: 630-739-1100 FAX: 630-739-1405				

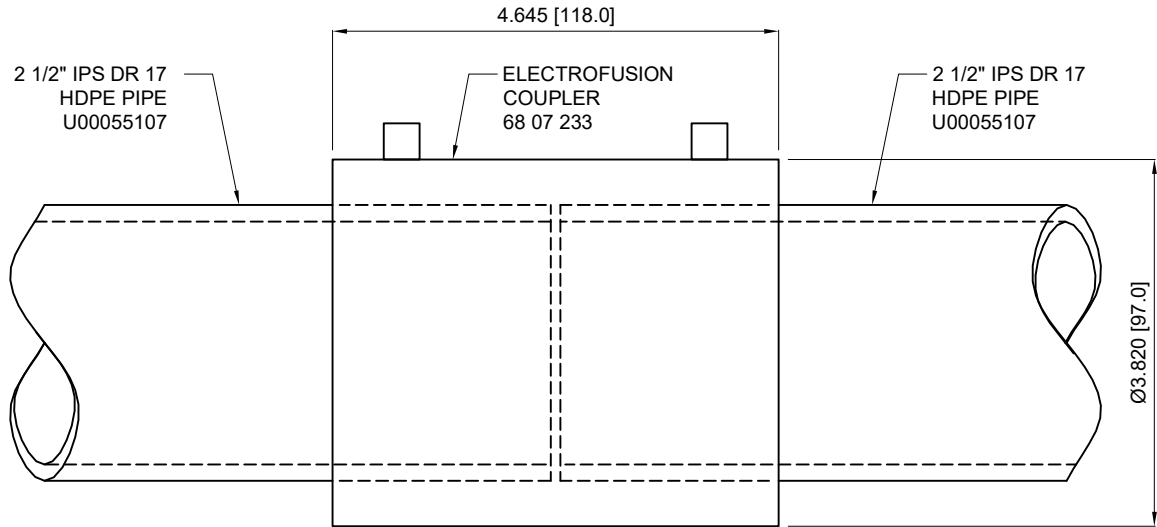

**INSTALLATION PROCEDURE:**

(SEE MANUFACTURER INSTRUCTION MANUAL FOR DETAILED INSTRUCTIONS)


1. CUT PIPE ENDS PRECISELY AT RIGHT ANGLES TO THE PIPE AXIS.
2. CLEAN BOTH PIPE ENDS CAREFULLY.
3. SCRAP BOTH PIPES ENDS AS REQUIRED TO REMOVE THE OXIDE LAYER COMPLETELY
4. CLEAN BOTH PIPE ENDS WITH CONCENTRATED ISOPROPYL ALCOHOL.
5. USE REROUNDING TOOLS TO CORRECT OVAL PIPE IF NEEDED.
6. USE ALIGNMENT CLAMPS TO SECURE THE ALIGNMENT OF CONNECTED PIPES
7. PROVIDE SUPPORT TO THE PIPE AND COUPLER TO PREVENT ANY MOVEMENT.
8. ENSURE THERE IS NO EXISTING GAPS BETWEEN COUPLE AND PIPE FACE.
9. ATTACH LEADS OF THE FUSION PROCESSOR TO THE COUPLER.
10. SCAN THE BARCODE ON THE COUPLER AND CONFIRM THE COUPLER'S SIZE ON THE PROCESSOR SCREEN.
11. INITIATE FUSION PROCESS.
12. UNPLUG THE LEADS AS SOON AS THE FUSION PROCESS ENDS.
13. CHECK COOLING TIME OF THE PROVIDED COUPLER BASED ON COUPLER'S SIZE.
14. DO NOT ALLOW MOVEMENT OR APPLIED PRESSURE ON THE JOINTS BEFORE COOLING TIME ENDS.

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		WEIGHT 0.770 LBS	REV.	DATE	DWG.	CHK.	PART NUMBER <b>68 07 233</b>
<b>ELECTROFUSION COUPLER CONNECTION FOR 2 1/2" IPS DR 17 HDPE PIPE</b>					SCALE 1 : 2				DRAWING NUMBER: <b>68 07 233</b>
DATE: 02/27/19	DWG: I. TIRA	CHK: SI	APP: SI	MATERIAL: COMPOSITE					

THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF **DYWIDAG SYSTEMS INTERNATIONAL, USA, INC.** THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.

**DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.**  
 POST TENSIONING / REINFORCING UNIT PHONE: 630-739-1100  
 320 MARMON DRIVE - BOLINGBROOK, IL FAX: 630-739-1405



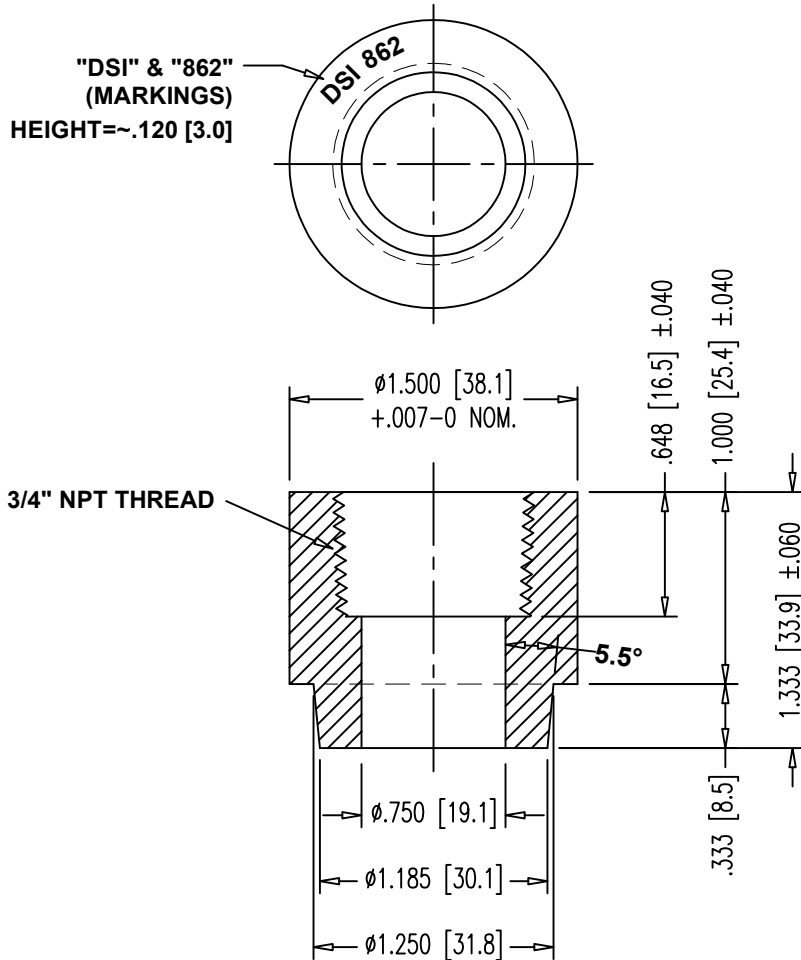

**WELDING OPERATIONS:**  
 DRILL A HOLE USING SPECIFIED CONE DRILL TOOL  
 WHEREVER NEEDED IN HDPE PIPE. HEAT UP HDPE  
 GROUT PORT AND THE HOLE IN DUCT FOR ABOUT  
 10 SECONDS USING PES-TEC WELDING EQUIPMENT.  
 RELEASE THE GROUT PORT AND PRESS INTO THE  
 HOLE IN DUCT BY HAND FOR 15 SECONDS.

**MATERIAL: POLYETHYLENE**  
**COLOR: BLACK (UV PROTECTED)**  
**USAGE: FOR SMOOTH HDPE PIPE**  
**PRESSURE RATED: 150 PSI**

DIMENSIONS: INCH [mm] mm FOR REFERENCE ONLY		QUALITY PLAN NUMBER:		TOLERANCES: ±.020 UNLESS NOTED	WEIGHT 0.045 LBS.	REV.	DATE	NAME	PART NUMBER: <b>00 00 862</b>
<b>3/4" NPT PE PORT</b>				MATERIAL: SEE ABOVE	SCALE 1:1				DRAWING NUMBER: <b>00 00 862</b>
				DATE: 01-11-19	DWG: G. MALECKI	CHK: S.I.	APP: S.I.		
<p>THIS DRAWING, THE PERTINENT ENCLOSURES, DESCRIPTIONS, CALCULATIONS ETC. AND THEIR CONTENTS ARE THE PROPERTY OF DYWIDAG SYSTEMS INTERNATIONAL, USA, INC. THEY ARE NOT ALLOWED TO BE DUPLICATED WITHOUT OUR PERMISSION. THEY ARE ALSO NOT TO BE SHOWN OR EXPLAINED FOR ANY REASON TO A THIRD PARTY OTHER THAN FOR REASONS EXPRESSLY INTENDED BY DSI'S SUBMITTAL TO THE ORIGINAL RECEIVER. THEY HAVE TO BE RETURNED UPON REQUEST.</p> <p><b>DYWIDAG-SYSTEMS INTERNATIONAL, USA, INC.</b>          320 MARMON DRIVE - BOLINGBROOK, IL 60440          PHONE: 630-739-1100 FAX: 630-739-1405</p>									

