


TRAFFIC ENGINEERING MANUAL



TEM
Traffic Engineering Manual
January 2012

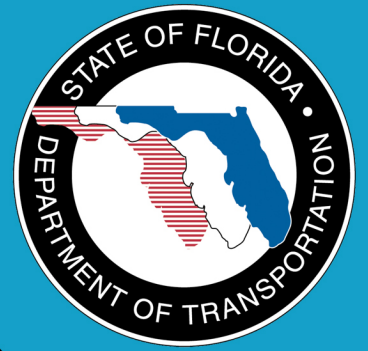

Chapter 1 PROCEDURE

Traffic Engineering Manual Adoption Procedure	1-1-1
---	-------

Chapter 2 SIGNS

2.1 Use of Slippery When Wet Signs	2-1-1
2.1.1 Conditions for Use	2-1-1
2.1.2 Location and Placement	2-1-1
2.1.3 Enhancement	2-1-2
2.1.4 Notification.....	2-1-2
2.2 Overhead Street Name Signs	2-2-1
2.2.1 Purpose	2-2-1
2.2.2 Standards	2-2-1
2.2.3 Installation	2-2-2
2.2.4 Sign Design	2-2-2
2.3 Signs and Markings at Divided Highways and Crossroads.....	2-3-1
2.4 Symbol Signs on the State Highway System	2-4-1
2.4.1 Definitions.....	2-4-1
2.4.2 Conditions for Use.....	2-4-1
2.5 Destination Distance Signs at Rural Interstate and Freeway Exit Ramp Terminals.....	2-5-1
2.6 Bridge Signs and Markings	2-6-1
2.6.1 Bridge and Sign Structure Low Clearance Signs.....	2-6-1
2.6.2 Bridge Pier Marking	2-6-1
2.6.3 Cross Road Name Signs on Overpasses	2-6-1
2.6.4 Narrow Bridge Treatment	2-6-2
2.7 Place Name Signs on the State Highway System (Now <i>Part IV of Rule 14-51, F.A.C.</i>)	2-7-1
2.8 Move Accident Vehicles from Travel Lanes Signs	2-8-1
2.8.1 Sign Design	2-8-1
2.8.2 Location and Placement	2-8-1
2.9 No Passing Zone Signs.....	2-9-1
2.9.1 Purpose	2-9-1
2.9.2 Sign Design and Installation	2-9-1
2.10 Vending Machine Signs	2-10-1
2.10.1 Physical Characteristics	2-10-1
2.10.2 Location and Placement	2-10-1
2.11 Guidelines for Bicycle Warning Signs	2-11-1
2.11.1 Definitions.....	2-11-1
2.11.2 General Instructions	2-11-1
2.11.3 When Sign Requests May Be Approved	2-11-2
2.11.4 Sign Design	2-11-2

2.11.5	Sign Placement	2-11-3
2.12	Recycling Collection Center Signs	2-12-1
2.12.1	Definition	2-12-1
2.12.2	Sign Design	2-12-1
2.12.3	Sign Installation	2-12-1
2.13	Signing for Safety Belt Use and Child Restraint Laws	2-13-1
2.13.1	Purpose	2-13-1
2.13.2	Background	2-13-1
2.13.3	State Highway System Points of Entry	2-13-1
2.13.4	Rest Areas and Interstate Welcome Centers	2-13-1
2.13.5	Other Locations	2-13-2
2.13.6	Standard Safety Belt Sign	2-13-3
2.13.7	Sign Design	2-13-3
2.13.8	Sign Availability	2-13-3
2.14	Signing for Evacuation Routes	2-14-1
2.14.1	Purpose	2-14-1
2.14.2	Background	2-14-1
2.14.3	Procedure	2-14-1
2.14.4	Sign Design	2-14-2
2.14.5	Sign Use	2-14-2
2.14.6	Sign Placement	2-14-2
2.14.7	Sign Installation	2-14-3
2.14.8	Shelter and Traveler Information Signing	2-14-3
2.14.9	Shelter Sign Design and Use	2-14-4
2.14.10	Traveler Information Signing Design and Use	2-14-4
2.14.11	Continuous Hinge Requirements	2-14-6
2.14.12	Radio Frequency Information Signs	2-14-6
	2.14.12.1 Radio Frequency Information Sign Design	2-14-7
	2.14.12.2 Radio Frequency Information Sign Placement	2-14-7
	2.14.12.3 Radio Frequency Information Sign Installation	2-14-9
2.14.13	Evacuation Sign Messages	2-14-10
	2.14.13.1 Shoulder Operation	2-14-10
	2.14.13.2 Dynamic Message Signs (DMS)	2-14-12
	2.14.13.3 Location of DMS and Static Signs	2-14-13
2.15	Smoke on Highway Signs	2-15-1
2.15.1	General	2-15-1
2.15.2	Temporary Smoke on the Highway Sign	2-15-1
2.15.3	Prescribed Burn Sign	2-15-2
2.15.4	Sign Installation and Removal	2-15-3
2.16	Signing for Supplemental Guide Signs and Motorist Services on Limited and Non-Limited Access Highways (Now Rule Chapter 14-51, F.A.C.)	2-16-1
2.17	Emergency Highway Traffic Plan (Now Topic Number 956-030-001)	2-17-1

2.18	*FHP Highway Assistance Program.....	2-18-1
2.18.1	Purpose	2-18-1
2.18.2	Sign Location.....	2-18-1
2.18.3	Sign Design and Installation.....	2-18-1
	2.18.3.1 Interstate and Other Limited Access Routes	2-18-2
	2.18.3.2 Major Arterial Routes.....	2-18-2
2.18.4	Sign Availability	2-18-2
2.19	Holding for Future Section	
2.20	Call Box/Mile Marker Signs.....	2-20-1
2.21	Florida Litter Law Signs.....	2-21-1
2.21.1	Purpose	2-21-1
2.21.2	Sign Design and Placement	2-21-1
2.21.3	Sign Installation	2-21-2
2.22	Traffic Control for Toll Collection Facilities (Now included in Turnpike Plans Preparation and Practices Handbook).....	2-22-1
2.23	Florida's Turnpike and Toll Road Numbering and Signing Program	2-23-1
2.23.1	Purpose	2-23-1
2.23.2	Background	2-23-1
2.23.3	Road Numbering Program.....	2-23-1
2.23.4	Signing Program.....	2-23-2
2.23.5	Recommended Maximum Trailblaze Distance	2-23-4
2.23.6	Limited Access Sign Designs	2-23-4
2.24	Placement of Crime Watch Signs on the State Highway System.....	2-24-1
2.24.1	Purpose	2-24-1
2.24.2	Definitions.....	2-24-1
2.24.3	Background	2-24-1
2.24.4	Requests for Signing	2-24-1
2.24.5	Sign Locations.....	2-24-2
2.24.6	Sign Design and Placement	2-24-2
2.24.7	Installation and Maintenance.....	2-24-3
2.24.8	Special Considerations.....	2-24-3
2.25	Distance Signing for Non-Limited Access Highway.....	2-25-1
2.25.1	Purpose	2-25-1
2.25.2	Background	2-25-1
2.25.3	Procedure.....	2-25-1
2.26	Advance Guide Signs on Limited Access Highways	2-26-1
2.26.1	Purpose	2-26-1
2.26.2	Background	2-26-1
2.26.3	Definitions.....	2-26-1
2.26.4	Procedure.....	2-26-1

2.27	Commuter Assistance Signs	2-27-1
2.27.1	Purpose	2-27-1
2.27.2	Background	2-27-1
2.24.3	Sign Design and Installation	2-27-1
2.28	Reference Location Signs (Mile-Markers)	2-28-1
2.28.1	Purpose	2-28-1
2.28.2	Background	2-28-1
2.28.3	Standards	2-28-1
2.28.3	Criteria for Limited Access Roadways	2-28-1
2.28.4	Criteria for Non-Limited Access Roadways	2-28-1
2.29	Use of Fluorescent Yellow-Green Sheeting	2-29-1
2.29.1	Purpose	2-29-1
2.29.2	Criteria	2-29-1
2.29.2.1	Pedestrian Crossing Signs	2-29-1
2.29.2.2	Bicycle and Shared Use Path (Trail) Crossing Symbol Signs.....	2-29-2
2.29.2.3	School Bus Stop Ahead Warning Signs	2-29-2
2.29.3	Application	2-29-2
2.30	One-Stop Career Center Signs	2-30-1
2.30.1	Purpose	2-30-1
2.30.2	Background	2-30-1
2.30.3	Definitions.....	2-30-1
2.30.4	Sign Design and Installation	2-30-1
2.31	Unique Transportation Symbol Signs	2-31-1
2.31.1	Purpose	2-31-1
2.31.2	Background	2-31-1
2.31.3	Scope	2-31-1
2.31.4	Passenger Ship Sign	2-31-1
2.31.5	Amtrak Sign.....	2-31-2
2.31.6	Greyhound Sign	2-31-3
2.31.7	Installation and Placement	2-31-3
2.32	511 Telephone Service Sign	2-32-1
2.32.1	Purpose	2-32-1
2.32.2	Sign Design and Placement	2-32-1
2.32.2.1	Interstate and Other Limited Access Routes	2-32-2
2.32.2.2	Major Arterial Routes	2-32-2
2.33	Signing for Nature-based Tourism and Heritage Tourism Trails	2-33-1
2.33.1	Purpose	2-33-1
2.33.2	Background	2-33-1
2.33.3	Pilot Program.....	2-33-1
2.33.4	Criteria for Signing Program	2-33-2
2.33.5	DOT Participation	2-33-2
2.33.6	Sign Approval and Design	2-33-2
2.33.7	Sign Maintenance.....	2-33-3

2.34	Signing for the Florida Scenic Highways Program and the National Scenic Byways Program	2-34-1
2.34.1	Purpose	2-34-1
2.34.2	Background	2-34-1
2.34.3	Program Coordination	2-34-2
2.34.4	Sign Criteria.....	2-34-2
2.34.5	Florida Scenic Highways Signs	2-34-3
	2.34.5.1 Coordination	2-34-3
	2.34.5.2 Sign Detail	2-34-3
	2.34.5.3 Sign Installation	2-34-4
	2.34.5.4 Maintenance.....	2-34-5
2.34.6	National Scenic Byway Signs	2-34-5
	2.34.6.1 Coordination	2-34-5
	2.34.6.2 Sign Detail	2-34-6
	2.34.6.3 Sign Installation	2-34-6
	2.34.6.4 Maintenance	2-34-7
2.35	Signing for Memorial Roadway Designations.....	2-35-1
2.35.1	Purpose	2-35-1
2.35.2	Background	2-35-1
2.35.3	Signing Process	2-35-1
2.35.4	Sign Installation and Maintenance.....	2-35-2
2.35.5	Sign Design	2-35-2
2.36	Community Wayfinding Guide Signs.....	2-36-1
2.36.1	Purpose	2-36-1
2.36.2	Background	2-36-1
2.36.3	Standards	2-36-1
2.36.4	Review Process.....	2-36-1
2.37	Advance Street Name Signs	2-37-1
2.37.1	Purpose	2-37-1
2.37.2	Background	2-37-1
2.37.3	Definitions.....	2-37-1
2.37.4	Standards	2-37-1
2.37.5	Advance Street Name Signs at Signalized Intersections.....	2-37-2
2.37.6	Advance Street Name Signs at Non-Signalized Intersections	2-37-4
2.37.7	Advance Street Name Plaques on Intersection Warning and Advance Traffic Control Signs	2-37-4
2.38	Use of Temporary Stop Signs at Non-Functioning Signalized Intersections	2-38-1
2.38.1	Purpose	2-38-1
2.38.2	Conditions for Use	2-38-1
2.38.3	Locations and Placement	2-38-1
2.38.4	Storage and Distribution	2-38-2
2.38.5	Removal and Recovery	2-38-2
2.39	Warning, Stop, and Yield Sign Sizes	2-39-1
2.39.1	Background	2-39-1
2.39.2	Recommended Warning Sign Sizes	2-39-1
2.39.3	Recommended Stop Sign Sizes	2-39-3

2.39.4	Recommended Yield Sign Sizes	2-39-4
2.40	Displaying Messages on Dynamic Message Signs Permanently Mounted on the State Highway System.....	2-40-1
2.40.1	Purpose	2-40-1
2.40.2	Background	2-40-1
2.40.3	Definitions.....	2-40-1
2.40.4	Approved Standard Safety Messages for Display on Permanently Mounted DMS	2-40-1

Chapter 3 SIGNALS

3.1	Signalized Intersection Flashing Mode Operation and Flashing Beacons.....	3-1-1
3.1.1	Definitions.....	3-1-1
3.1.2	Recommendations for Signalized Intersections.....	3-1-1
	3.1.2.1 Programmed Flashing Mode Operation.....	3-1-1
	3.1.2.2 Non-Programmed Flashing Mode Operation	3-1-2
3.1.3	Application Requirements for Signalized Intersection.....	3-1-2
3.1.4	Heads to be Flashed	3-1-3
3.1.5	Flashing Indication Colors	3-1-3
3.1.6	Application Requirements for Flashing Beacons	3-1-4
3.1.7	Operation of Flashing Beacons	3-1-4
3.2	Guidelines for Left Turn Treatment.....	3-2-1
3.2.1	Purpose	3-2-1
3.2.2	Left Turn Signal Phasing	3-2-1
3.2.3	Left Turn Signal Displays.....	3-2-3
3.2.4	Signal Display for Exclusive Left Turn Lane	3-2-3
3.2.5	Left Turn Phases for Separated Left and Thru Lanes.....	3-2-3
3.2.6	Permissive Only Mode in Multi-Left Turn Approaches.....	3-2-6
3.3	Scheduling Traffic Signal Studies and Funding Arrangements	3-3-1
3.3.1	Purpose	3-3-1
3.3.2	General.....	3-3-1
3.3.3	Response to Signal Requests and Scheduling Traffic Signal Studies.....	3-3-1
3.3.4	Traffic Signal Studies and Engineering.....	3-3-2
3.3.5	Funding Arrangements for Warranted New Signal Installations	3-3-3
3.3.6	Other Considerations.....	3-3-4
3.4	Emergency Traffic Control Signals.....	3-4-1
3.4.1	Purpose	3-4-1
3.4.2	Background	3-4-1
3.4.3	Procedure.....	3-4-1
3.4.4	Configuration and Operation of Emergency Traffic Control Signals	3-4-2
3.4.5	Emergency Signal Sign	3-4-3
3.4.6	Other Requirements	3-4-3

3.5	Traffic Signal Mast Arm Support Boundaries	3-5-1
3.5.1	General.....	3-5-1
3.5.2	Implementation.....	3-5-1
	3.5.2.1 Mast Arm Structures Boundary Maps.....	3-5-1
3.6	Standardization of Yellow Change and Red Clearance Intervals for Signalized Intersections.....	3-6-1
3.6.1	Purpose	3-6-1
3.6.2	Standard.....	3-6-1
	3.6.2.1 Yellow Change Interval	3-6-2
	3.6.2.2 Red Clearance Interval.....	3-6-2
3.7	Audible Pedestrian Signals	3-7-1
3.7.1	Purpose	3-7-1
3.7.2	General.....	3-7-1
3.7.3	Procedure.....	3-7-1
3.7.4	Approval/Denial Process	3-7-2
3.8	Mid-Block Pedestrian Crosswalks	3-8-1
3.8.1	Purpose	3-8-1
3.8.2	General.....	3-8-1
3.8.3	Definitions.....	3-8-1
3.8.4	Procedure.....	3-8-2
3.8.5	Installation Criteria and Considerations	3-8-3
3.8.6	Mid-block Pedestrian Crossing Treatments.....	3-8-6
3.8.7	Selection Guidance for Pedestrian Treatments	3-8-10
3.9	Countdown Pedestrian Signal Head Applications.....	3-9-1
3.9.1	Purpose	3-9-1
3.9.2	General.....	3-9-1
3.9.3	Installation Criteria.....	3-9-1
3.9.4	Installation/Removal Process	3-9-2

Chapter 4 MARKINGS

4.1	Crosswalks in Heavy Pedestrian Concentration Areas	4-1-1
4.1.1	General.....	4-1-1
4.1.2	Markings.....	4-1-1
4.1.3	Signing	4-1-1
4.2	Pavement Word, Symbol, and Arrow Markings	4-2-1
4.2.1	General.....	4-2-1
4.2.2	Lane Use Arrow and “Only” Pavement Markings on Intersection Approaches.....	4-2-2
4.2.3	Route Shield Pavement Markings	4-2-3
4.2.4	Route Shields for Wrong Way Treatment.....	4-2-5
4.3	Use of Blue Raised Pavement Markers to Identify Fire Hydrants	4-3-1
4.3.1	Purpose	4-3-1
4.3.2	Background	4-3-1
4.3.3	Procedure.....	4-3-1

4.3.4	Guidelines	4-3-2
4.4	Roundabout Markings.....	4-4-1

Chapter 5 SPECIALIZED OPERATIONAL TOPICS

5.1	Golf Cart Crossing and Operation on the State Highway System.....	5-1-1
5.1.1	Purpose	5-1-1
5.1.2	General.....	5-1-1
5.1.3	Definitions.....	5-1-1
5.1.4	Procedure.....	5-1-2
5.1.5	Criteria for Approval of Crossing	5-1-5
5.1.6	Operation of Golf Carts on Sidewalks.....	5-1-8

Chapter 6 SAFE MOBILITY FOR LIFE PROGRAM

6.1	Florida’s Elder Road User Program (Now Safe Mobility for Life Program at: www.dot.state.fl.us/TrafficOperations/Operations/SafetyisGolden.shtm)
6.2	Warning, Stop, and Yield Sign Sizes to Accommodate the Elder Roadway User in Florida (Now Section 2.39 Warning, Stop, and Yield Sign Sizes)
6.3	Intersection Guide Signs (Now Section 2.37 Advance Street Name Signs)

Chapter 7 CERTIFICATION AND APPROVAL OF TRAFFIC CONTROL SIGNALS AND DEVICES

7.1.	Approved Product List Certification and Approval Process	7-1-1
-------------	---	--------------

HISTORY

INDEX

Chapter 1

ADOPTION PROCEDURE

TRAFFIC ENGINEERING MANUAL ADOPTION PROCEDURE

PURPOSE:

To provide traffic engineering standards and guidelines to be used on the State Highway System by the Department's District Traffic Operations Offices.

AUTHORITY:

Sections 20.23(4)(a) and 334.048(3), Florida Statutes (F.S.)

SCOPE:

The *Traffic Engineering Manual (TEM)* affects the State Traffic Engineering and Operations Office and the District Traffic Operations Offices.

REFERENCES:

Chapter 316, F.S.
Rule 14-15.010, F.A.C., Manual on Uniform Traffic Control Devices (MUTCD)
Topic No. 025-020-002, Standard Operating System.

1. DISTRIBUTION

The official recipient of this manual will be the District Traffic Operations Engineers and their staff, and the State Traffic Engineering and Operations Office managers and staff.

2. AVAILABILITY

The *TEM* is available free of charge at the Department's State Traffic Engineering and Operations Office website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/Studies/TEM/TEM.shtm>

3. REGISTRATION

Users of the *TEM* interested in receiving automatic notifications of revisions to the manual by e-mail may subscribe from the Department's web site. As required by [Section 283.55, F.S.](#), by March 1 of each odd-numbered year, we will survey e-mail addresses from our current registration list and purge any outdated registrations.

4. REVISIONS AND ADDITIONS

- (1) The District Traffic Operations Engineers (DTOE) and the State Traffic Operations Engineer (STOE) will constitute the Manual Review Committee.
- (2) Items warranting immediate change will be made with the approval of the STOE (after a majority vote of the Manual Review Committee and consultation with any other affected parties). Statewide meetings of DTOEs will be held every six months, and a major agenda item will be any additions/changes either necessary or recommended to the **TEM**.
- (3) All revisions will be coordinated through the Forms and Procedures Office prior to implementation.
- (4) Substantive revisions or policy-related issues, as determined by the Manual Review Committee, will be approved by the Secretary following the process established in the [Standard Operating System, Topic No. 025-020-002](#).
- (5) Once revisions and/or additions have been approved by the Secretary they will be posted on the State Traffic Engineering and Operations Office website.
- (6) An e-mail notification will be made to all registered holders of the **TEM** that the revisions have been posted on the website.

5. TRAFFIC ENGINEERING VARIATIONS

- (1) The Department's traffic engineering criteria and standards contained in this manual are established by recommended practice of the [Manual on Uniform Traffic Control Devices \(MUTCD\)](#) or the [American Association of State Highway and Transportation Officials \(AASHTO\)](#) guidelines and/or by specific research conducted for the Department. There may be site specific conditions or certain circumstances that may warrant a variation from the criteria or standards referenced herein. A variation shall be a one-time event on a case-by-case basis or it may be that the **TEM** will be revised to incorporate a variation.
- (2) A request for and subsequent approval of any variation from the criteria and/or standards contained in the **TEM** shall be subject to the procedure established below in **Section 6**.

6. TRAFFIC ENGINEERING VARIATION PROCESS

- (1) A formal written request from a local governmental agency, engineering consultant, or other interested party may be submitted to the appropriate DTOE and should include the following:
 - (a) Proposed location (State Road ID, Mile Post).
 - (b) Applicable standard or criterion (Chapter & Section Number).
 - (c) Statement of the reasons why the required criteria or standards are not applicable to the site specific conditions.
 - (d) Statement of the proposed variation.
 - (e) Statement of how the proposal can be as safe by not following the criteria or standard.
 - (f) Description of other impacts (operations, environmental and community needs).
- (2) The District Traffic Operations Staff will review and evaluate the proposed variation request according to the following guidelines:
 - (a) Whether the variation is absolutely necessary for completing a project.
 - (b) Whether other alternatives have been considered that would meet current **TEM** criteria or standards.
 - (c) Whether the proposed variation has been used in other areas – local, state or national. Provide examples, including before and after data, if available.
 - (d) Whether the proposed variation will require Federal Highway Administration approval or coordination.
- (3) If the District Staff believes a variation may be warranted, the DTOE shall forward the request for variation to the State Traffic Engineering and Operations Office for review.
- (4) If the District Staff believes a variation is not warranted, the DTOE shall document the reasons and advise the requestor of the findings.
- (5) Upon review by the State Traffic Engineering and Operations Office Staff, the STOE shall submit a memorandum concerning the decision for requested variation, including any special conditions or requirement to the appropriate

DTOE. The STOE may consult with the DTOEs to obtain statewide consensus prior to approving and authorizing the requested variation.

- (6) The STOE memorandum will serve as the formal document authorizing or denying the requested variation from the applicable **TEM** criteria or standard and shall be filed electronically on the State Traffic Engineering and Operations Office SharePoint site for future reference.

7. TRAINING

None required.

8. FORMS

None required.

Chapter 2

SIGNS

Section 2.1

USE OF SLIPPERY WHEN WET SIGNS

2.1.1 CONDITIONS FOR USE

The District Traffic Operations Engineer shall request the District Maintenance Engineer to erect SLIPPERY WHEN WET (**W8-5**) signs at locations where it has been determined there is a slippery pavement condition. A slippery pavement is defined when a standard friction test at 40 mph has determined the skid numbers are less than 25. When the posted highway speed is above 45 mph, SLIPPERY WHEN WET signs should be installed when the skid numbers are less than 30, and also one of the following conditions is met:

- When the Safety Ratio (Actual Crash Rate divided by the Critical Crash Rate) is greater than or equal to one.
- Any downgrade greater than 3 percent.
- At intersections with traffic signals.

2.1.2 LOCATION AND PLACEMENT

Additional signs may be needed at locations with the following conditions:

- (1) **Horizontal Curves.** SLIPPERY WHEN WET signs are to be placed prior to the CURVE sign with an advisory speed plate. The ball-bank indicator provides a reasonable speed through the curve; however, a lower speed may be desired if there are known extraordinary hazards such as hydroplaning.
- (2) **Hydroplaning.** Generally, hydroplaning only occurs at speeds above 47 mph; however, excessive runoff across travel lanes may produce hydroplaning at lower speeds. Multi-lane facilities, rutted lanes, built-up shoulders, and downgrades are candidate locations. If excessive water buildup cannot be corrected, then SLIPPERY WHEN WET signs may be appropriate even when skid numbers are greater than 30.
- (3) **Ramp and Bridge Decks.** Interchange exit or entrance ramps on sharp curves and on a downgrade may present a hazardous condition if the pavement is also slippery. Special attention should be given to ramps with compound curves. A pavement friction inventory is normally maintained for interchange ramps; however, special tests, at speeds less than 40 mph can be requested.

SLIPPERY WHEN WET signs should be used with an advisory exit speed sign, RAMP XX MPH (**W13-2**).

SLIPPERY WHEN WET signs shall be placed in advance of all moveable and non-moveable steel deck bridges. These signs should be placed in accordance with [Table 2C-4, Guidelines for Advance Placement of Warning Signs in the MUTCD](#).

2.1.3 ENHANCEMENT

When roadway surface conditions exist that might adversely affect a motorcyclists' ability to maintain control of their motorcycle under wet conditions, a MOTORCYCLE (**W8-15P**) plaque as shown in **Figure 2.1-1** may be mounted below the warning sign. Additional warnings should be placed at appropriate intervals where the condition exists.

Figure 2.1-1. Motorcycle Plaque



2.1.4 NOTIFICATION

- (1) The District Maintenance Engineers will promptly notify in writing the District Traffic Operations Engineer when SLIPPERY WHEN WET signs have been erected.
- (2) The District Traffic Operations Engineer shall request the District Maintenance Engineer to remove SLIPPERY WHEN WET signs that are no longer warranted under the above provisions.

Section 2.2

OVERHEAD STREET NAME SIGNS

2.2.1 PURPOSE

Street name guide signs for most streets that intersect with a road on the state highway system are normally furnished, installed, and maintained by the appropriate local government. However, at signalized intersections on the state highway system, larger overhead street name signs should be used. These signs may be furnished and installed, by the Department.

2.2.2 STANDARDS

- (1) Street name signs shall only be used to identify cross streets. They are not intended to identify destinations such as cities or facilities.
- (2) The word Street, Boulevard, Avenue, etc., may be abbreviated or deleted to conserve sign panel length. However, if confusion would result due to similar street names in the area, for example Seminole Street and Seminole Avenue, this deletion should not be made.
- (3) When a cross street is known by both route number and a local name, use of the local name is preferred on the overhead street name signs since the route number is identified on route markers along the route.
- (4) When a cross street has dual local street name designations, for example N.W. 31 Avenue and Martin Luther King Jr. Boulevard, both names may be used on the overhead street name signs. However, the Department is responsible for the primary designation (i.e., name shown on the Official Florida Transportation Map). If a secondary designation is approved by local resolution, the local government shall be responsible for the installation of this secondary designation.
- (5) When a cross street has a different name on each side of the intersection, both names shall be shown on the overhead street name sign, two signs should be used with one on the left and one on the right side of the intersection. In some instances, the type of signal span design may dictate the need for the use of a single sign with both names. When used, the names should be separated and accompanied by directional arrows, with the left name displayed over the right.
- (6) The display of block numbers is not required when two street names with arrows are provided on a single panel.

2.2.3 INSTALLATION


- (1) The location of the overhead street name sign on a signal strain pole and/or mast arm may vary. However, it shall not interfere in any way with the motorist view of the signal heads.
 - (a) For static signs, the preferred installation is shown in the [Department's Design Standards, Index No. 17356](#).
 - (b) For internally illuminated signs, the preferred installation is shown in the [Department's Design Standards, Index No. 17748](#).
- (2) In the case of separate street names on each side of the street, one sign should be placed to the right of the centerline and signal heads and the other to the left side of the centerline and signal heads.

2.2.4 SIGN DESIGN

- (1) Overhead street name signs shall be designed in accordance with [Section 2D.43 of the MUTCD](#).
- (2) The sign panel used for overhead street name signs shall be 24 inches in height with length determined by legend.
- (3) At a minimum, 8-inch upper and 6-inch lower case lettering for the street name and 6-inch all upper case lettering for the block numbering text on the second line shall be used. The preferred font is Series E-Modified; however, Series E may be used to accommodate the amount of legend. An example of this design is shown in **Figure 2.2-1**.
- (4) When structurally possible, overhead street name signs should be designed in compliance with FHWA recommendations for older drivers ([Section 2D.43 of the MUTCD](#) and [Recommendation I-J-2 of the FHWA Design Handbook for Older Drivers and Pedestrians](#)). When used, the minimum lettering size should be 12-inch upper case with 9-inch lower case.
- (5) Internally-illuminated signs should be used whenever possible to provide better night-time visibility, and to benefit older drivers. When used, the devices shall be on the [Approved Products List \(APL\)](#). They shall be designed using a white message on a green background, and if a border is used it shall be white.
- (6) Overhead street name signs using standard panels shall have a white message and border on a green background. If internally illuminated overhead street name signs are not installed, high intensity sheeting should be used for added visibility at night.

- (7) Sign panels should be two-sided in order to provide for a sign display on both the right and left side of each intersection approach.

Figure 2.2-1. Overhead Street Name Sign

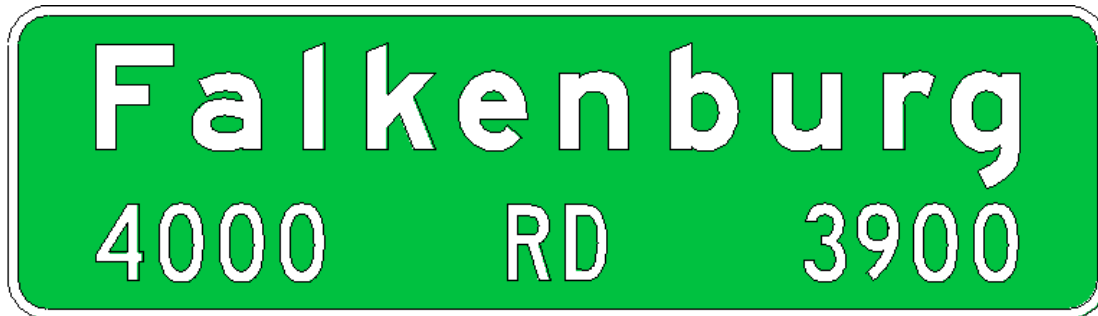

Section 2.3

SIGNS AND MARKINGS AT DIVIDED HIGHWAYS AND CROSSROADS

The Department's standards for this section are shown in the current edition of the [Department's Design Standards, Index No. 17346, Sheet 5 of 14](#) and [Index No. 17349](#).

Section 2.4

SYMBOL SIGNS ON THE STATE HIGHWAY SYSTEM

2.4.1 DEFINITIONS

Symbol Sign. Sign used to inform, advise, regulate, or warn of an impending situation where a symbol depicts the approaching situation or information desired.

Word Message Sign. Sign used as an alternate to a symbol sign describing by word message an approaching situation or information desired.

Educational Plaque. A word message sign used jointly with a new symbol sign to familiarize the motoring public with the meaning of the symbol displayed.

Symbol signs are more easily recognized and better understood by the motoring public. The [MUTCD](#) encourages their use as the primary advisory or warning sign.

With Florida's large tourist population, a broader use of symbol signs is a desirable and important step toward the greater safety and facilitation of traffic. Accordingly, it is appropriate to *require* the use of symbol signs over word message signs.

2.4.2 CONDITIONS FOR USE

- (1) A symbol sign, if available, shall be used where an advisory, regulatory, or warning sign is warranted to depict an approaching situation or provide information. Word message signs as alternates to symbol signs and educational plaques are generally less effective. However, there may be circumstances where a word message sign is more appropriate. In these cases, the District Traffic Operations Engineer should maintain documentation of the exception in district files.
- (2) Any proposed new symbol will require approval as provided in [Section 1A.10 of the MUTCD](#). All requests for a new symbol shall be sent to the State Traffic Operations Engineer for review and processing with the Federal Highway Administration.
- (3) When a new symbol sign is utilized, an educational plaque may be used to explain the new symbol by word message as provided in [Section 2A.12 of the MUTCD](#).

Section 2.5

DESTINATION-DISTANCE SIGNS AT RURAL INTERSTATE AND FREEWAY EXIT RAMP TERMINALS

- (1) Combined DESTINATION-DISTANCE (*D1-1a, D1-2a, and D1-3a*) signs should be used at exit ramp terminals on rural interstates and freeways in lieu of DESTINATION (*D1-1*) signs.
- (2) The combined DESTINATION-DISTANCE sign shall only be used facing exiting traffic from rural interstate and freeway ramps.
- (3) Existing DESTINATION signs at exit ramp terminals should be replaced with the combination DESTINATION-DISTANCE signs during the course of routine sign replacement activities.
- (4) Distances should be determined from the best information available and reflect the distance from the ramp terminal to a control point in the named destination. Control points for all Florida cities that are listed on the official [Florida Distance Chart](#) are maintained by the Transportation Statistics Office.
- (5) In the case of places not on the chart, a control point may be defined by the district, usually as the junction of two main routes within the urban area.
- (6) Distance figures shall be shown just after the destination name. When a sign must accommodate destinations in different directions, a line should divide the destinations as shown in [Figure 2D-7 of the MUTCD](#).
- (7) Signs shall have a white legend on green background. The signs shall be individually detailed in plans and use as a minimum 8-inch numerals and 8/6 upper/lower case lettering.

Section 2.6

BRIDGE SIGNS AND MARKINGS

2.6.1 BRIDGE AND SIGN STRUCTURE LOW CLEARANCE SIGNS

- (1) A LOW CLEARANCE (*W12-2*) sign shall be placed in advance of every bridge or structure having a minimum vertical clearance of 14 feet 6 inches or less except as noted below.
- (2) In urban areas, where advance signs could be blocked by traffic or where competition with advertising signs make advance signs ineffective, the LOW CLEARANCE sign or marking should be placed on the bridge beam or equivalent.
- (3) A LOW CLEARANCE sign or marking shall also be placed on the bridge beam or equivalent of every bridge or structure having a minimum vertical clearance of 13 feet 6 inches or less.
- (4) LOW CLEARANCE signing and marking shall conform to additional criteria outlined in [Section 2C.27 of the MUTCD](#).

2.6.2 BRIDGE PIER MARKING

- (1) Bridge piers shall be marked only when they are not protected by a guardrail or a barrier and are less than 30 feet from the near edge of pavement.
- (2) The marking used shall be a Type 3 object marker 12 x 36-inch panel with alternating black and yellow stripes sloped down at an angle of 45 degrees toward the side of the pier which traffic is to pass.
- (3) For additional emphasis, a large surface bridge pier may be treated with sheeting having diagonal stripes at least 12 inches wide and similar in design and application to the Type 3 object marker.

2.6.3 CROSS ROAD NAME SIGNS ON OVERPASSES

These signs will no longer be installed, except as requested by law enforcement agencies or emergency rescue organizations. This includes signs mounted on the bridge beam or on posts. When this request is approved the signs should use 10.67-inch Series E Modified lettering.

2.6.4 NARROW BRIDGE TREATMENT

Signs and markings on narrow bridge approaches shall be as shown in the current edition of the [*Department's Design Standards, Index No. 17359.*](#)

Section 2.7

PLACE NAME SIGNS ON THE STATE HIGHWAY SYSTEM

This section has been rescinded since it is now included in Rule Chapter 14-51, Part IV of the Florida Administrative Code and can be viewed at the following website:

[http://www.dot.state.fl.us/TrafficOperations/pdf/Rule Chapter 14-51 FAC 11 24 11.pdf](http://www.dot.state.fl.us/TrafficOperations/pdf/Rule_Chapter_14-51_FAC_11_24_11.pdf)


Section 2.8

MOVE VEHICLES FROM TRAVEL LANE SIGN

2.8.1 SIGN DESIGN

MOVE VEHICLES FROM TRAVEL LANE (*R16-4*) signs are found in [Section 2B.65 of the MUTCD](#). These signs are used in support of [Section 316.061\(2\), F.S.](#) and replaces the experimental MOVE ACCIDENT VEHICLES FROM TRAVEL LANE sign (formerly *FTP 27-06 and FTP-28-06*.)

Figure 2.8-1. Move Vehicles from Travel Lane Sign

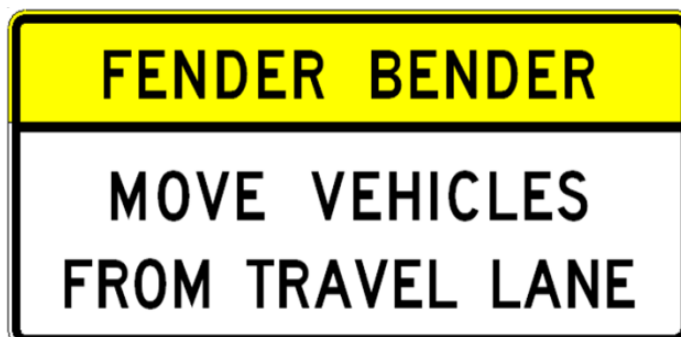

2.8.2 LOCATION AND PLACEMENT

- (1) On non-limited access highways a MOVE VEHICLES FROM TRAVEL LANE (*R16-4*) sign may be used in urban areas when their use will reduce queue lengths and delays, remove interference with traffic signal vehicle detectors, or enhance intersectional capacity. The 42 x 84 inch standard panel uses 6-inch Series C lettering. The 24 x 52 inch standard sign panel has 4-inch Series C letters.
- (2) On limited access highways, a 54 x 120 inch MOVE VEHICLES FROM TRAVEL LANE (*R16-4*) sign using 8-inch Series D lettering may be placed on the right side of urban freeways downstream from entrance ramps when their use will improve driver behavior concerning unnecessary and unlawful constriction of freeway travel lanes due to traffic crashes.
- (3) The MOVE VEHICLES FROM TRAVEL LANE (*R16-4*) sign details are available in the [Standard Highway Signs and Markings Book – Interim Releases for New and Revised Signs](#).

- (4) For permanent installations, specify yellow retroreflective background for the FENDER BENDER enhancement.
- (5) Mounting heights and lateral clearances should adhere to those specified in the [***Department's Design Standards, Index No. 17302***](#) and support systems shall meet or exceed Department standards of frangibility.

Section 2.9

NO PASSING ZONE SIGNS

- (1) The NO PASSING ZONE (*W14-3*) pennant sign, as shown in *Figure 2.9-1* shall **not** be used routinely at the beginning of all no passing zones.
- (2) The NO PASSING ZONE pennant sign may be installed as a supplement to pavement markings that establish a no passing zone under the following circumstances:
 - (a) At locations where pavement markings indicating no passing zones are not visible sufficiently in advance to give the driver adequate warning such as on vertical or horizontal curves.
 - (b) Other locations where such signs are determined desirable for safety as a result of an engineering study.
- (3) Proposed use of NO PASSING ZONE pennant signs at locations meeting the above criteria shall be reviewed and approved by the District Traffic Operations Engineer prior to installation.

Figure 2.9-1. No Passing Zone Pennant Sign.



W14-3
 NO PASSING ZONE

*Reduce spacing 20% for 48" size.
 **Reduce spacing 35% for 48" size.
 ***Use Series 2000 Alphabets for 36" size.

A	B	C	D	E	F	G	H	J	K	L	M	N
36	24	.5	.75	5.75	3 D	3 C	1.75	2.375	1.875	4	15.75	8.313
40	30	.5	.75	7.25	4 D	4 C	1.75	2.5	1.875	6.5	22.563	11.063
48	36	.625	.875	8.5	5 D	5 C	2	3	2.25	8	268.13	12.75
64	48	.75	1.25	12	6 D	6 C	3	4	3	10.75	33.688	16.563

WARNING SIGN COLORS:

LEGEND — BLACK
 BACKGROUND — YELLOW (RETROREFLECTIVE)

TTC SIGN COLORS:

LEGEND — BLACK
 BACKGROUND — ORANGE (RETROREFLECTIVE)

Section 2.10

VENDING MACHINE SIGNS

2.10.1 PHYSICAL CHARACTERISTICS

- (1) The VENDING MACHINES sign (**FTP-73-06**) shall be 66 x 30 inches with two lines of legend in 8-inch Series D lettering. The legend and border shall be white on blue background.
- (2) Sign details are available in the [Department's Design Standards, Index No. 17355](#).

2.10.2 LOCATION AND PLACEMENT

- (1) VENDING MACHINES signs will be appended at the bottom and between the supports of REST AREA 1 MILE (**D5-1**) signs. Such placement will not impair the breakaway characteristics of the sign.
- (2) At some rest areas, the VENDING MACHINE message is designed into a sign with flip-up panel which reveals the message SAFETY BREAK / FREE COFFEE (**FTP-74-06, FTP75-06, and FTP-76-06**)
- (3) Normally, the VENDING MACHINES message will be displayed. However, when the safety break is in effect, the sign is to be folded up to read SAFETY BREAK FREE COFFEE.
- (4) The SAFETY BREAK / FREE COFFEE sign detail is available in the [Department's Design Standards, Index No. 17355](#).

Section 2.11

GUIDELINES FOR BICYCLE WARNING SIGNS

2.11.1 DEFINITIONS

Bicycle Facilities. A general term denoting improvements and provisions by public agencies, to accommodate or encourage bicycling.

Designated Bicycle Facilities. Bicycle lanes that are always designated or marked with a solid white line, bike lane signs, and bicycle symbols on the pavement.

Designated Bicycle Trails. Any mapped recreational bicycle route.

Share the Road Signs. Signs used to warn motorists that bicycles and vehicles can legally use/share travel lanes.

2.11.2 GENERAL INSTRUCTIONS

- (1) To have maximum effect, these signs are to be used with discretion only at locations that have a problem and only where one or more of the following criteria are met:
 - (a) Safety problems when the roadway cannot be improved for bicycle features.
 - (b) Where there is high bicycle volume.
 - (c) Where there is a conflict or obvious courtesy problem between car and bicycle sharing the road.
- (2) Designated bicycling facilities are not eligible for this sign. As a general rule, corridors where paved shoulders or designated bicycle lanes are present will not be considered unless a special safety or road courtesy problem exists. Then the signs may be placed for added information.
- (3) Prior to approval by the District Traffic Operations Engineer, the District Bicycle Coordinator shall review volumes and crash data and provide recommendations for all signing requests.

2.11.3 WHEN SIGN REQUESTS MAY BE APPROVED

- (1) Roadway sections with a significant history of bicycle crashes will be considered for signing.
- (2) Roadway sections where motorists are likely to pass one or more bicyclists at least every one to three miles during daylight hours should be considered for signing.
- (3) Roadway sections that have special problems should be considered even if a lower volume of bicycling is anticipated. For instance, a roadway section that has the potential to attract bicyclists that has been narrowed from the standard 12-foot width may be considered.
- (4) Where designated bicycle trails are placed on short stretches of a major roadway that has not been improved for bicycling.
- (5) On approaches to bridges or any other section where motorists and bicyclists have reduced sight distance, operating widths or have been compromised due to right of way or actual roadway geometry restrictions.
- (6) Roadway sections adjacent to shared use paths where for the safety of other path users (pedestrians, children) and the cyclists' own safety, SHARE THE ROAD signing may be considered.

2.11.4 SIGN DESIGN

- (1) The SHARE THE ROAD Sign is a combination of the federally approved BICYCLE CROSSING WARNING SIGN (**W11-1**) and the SHARE THE ROAD (**W16-1**) plaque. The use of the **W11-1** sign is shown in [Section 9B.18 of the MUTCD](#). The use of the **W16-1** supplemental plaque is shown in [Section 9B.19 of the MUTCD](#).
- (2) The **W11-1** sign is 30 x 30 inches and yellow and black in color. The **W16-1** sign is a 18 x 24-inch supplemental plaque, with 4-inch Series C lettering, yellow and black in color. These signs can also be used in fluorescent yellow-green and black if it satisfies the criteria shown in **Section 2.29.2.2 of the TEM**. However, it is important that both sign panels be the same color.
- (3) An example of the SHARE THE ROAD sign is shown in **Figure 2.11-1**.

Figure 2.11-1. Share the Road Sign



2.11.5 SIGN PLACEMENT

- (1) The SHARE THE ROAD signs should be installed according to [Section 9B.19 of the MUTCD](#).
- (2) The signs shall be mounted according to height and lateral clearances specified in the [Department's Design Standards, Index No. 17302](#).
- (3) The sign shall be installed only at locations reviewed and approved by the District Traffic Operations Engineer to ensure that such signs do not interfere with existing traffic control devices.
- (4) Where a bike lane ends the SHARE THE ROAD sign (**Figure 2.11-1**) may be used instead of the BIKE LANE ENDS sign (**R3-16a**).

Section 2.12

RECYCLING COLLECTION CENTER SIGNS

2.12.1 DEFINITION

Recycling Collection Center. A facility open full time to the general public for the purpose of collecting items to be recycled, e.g., oil, aluminum, batteries, etc. The facility may operate as part of a recycling plant or may be a collection center for the distribution of these items to a recycling center elsewhere.

2.12.2 SIGN DESIGN

- (1) The RECYCLING COLLECTION CENTER (**FTP-48-06**) sign shall be 42 x 60 inches. Lettering shall be 4-inch, Series C. The legend and border shall be white on green.
- (2) The RECYCLING COLLECTION CENTER W/OPTIONAL MUNICIPALITY NAME (**FTP-49-06**) sign shall be 42 x 66 inches. Lettering shall be 4-inch, Series C. The legend and border shall be white on green.
- (3) A Directional Arrow (M-Series) may be attached below the sign panel if desired.
- (4) Exact sign details for both the **FTP-48-06** and the **FTP-49-06** can be found in the [Department's Design Standards, Index No. 17355](#), and in the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations//Operations/SignLibrary/Guide/Guide.shtm>

2.12.3 SIGN INSTALLATION

- (1) Sign requests must be submitted by local government to the appropriate District Traffic Operations Office for review and approval.
- (2) RECYCLING COLLECTION CENTER signs placed on the State Highway System should adhere to the mounting heights and lateral clearances specified in the [Department's Design Standards, Index No. 17302](#). Support systems shall meet or exceed the standards shown in [Section 700 of the Department's Standard Specifications](#).
- (3) RECYCLING COLLECTION CENTER signs shall not be permitted in a location where the view of existing traffic control devices may be obscured or where they might otherwise compete for the motorist's attention, for example, next to a stop sign.

Section 2.13

SIGNING FOR SAFETY BELT USE AND CHILD RESTRAINT LAWS

2.13.1 PURPOSE

To help reduce the number of highway deaths and injuries; to encourage compliance of motorists with the state's safety belt use and child restraint laws; and to establish uniform criteria for district implementation of signing for safety belt use and child restraint laws.

2.13.2 BACKGROUND

The Florida Safety Belt Law ([Section 316.614, F.S.](#)), mandates state agencies conduct a continuing safety and public awareness campaign and adopt programs designed to encourage compliance with usage requirements of the safety belt law. It is the intent of this procedure to support the actions of this statute and provide appropriate signing.


2.13.3 STATE HIGHWAY SYSTEM POINTS OF ENTRY

- (1) Districts Two and Three shall install and maintain signing at all State Highway System points of entry, informing motorists of the statutory requirement for safety belt use in the State of Florida.
- (2) On limited access highways, a FLORIDA SAFETY BELT AND CHILD RESTRAINT LAW sign (**FTP-44-06**) shall be installed downstream of existing "Welcome to Florida" and speed limit signs.
- (3) On non-limited access highways, a FLORIDA SAFETY BELT AND CHILD RESTRAINT LAW sign (**FTP-45-06**) shall be installed downstream of existing "Welcome to Florida" and speed limit signs.

2.13.4 REST AREAS AND INTERSTATE WELCOME CENTERS

- (1) A Rest Area Safety Belt Law sign (**Figure 2.13-1**) shall be installed and maintained in all rest areas and Interstate Welcome Centers informing motorists of the specific requirements of Florida's safety belt and child restraint laws. This sign shall be placed in a prominent location for easy viewing by pedestrians using the facilities.

Figure 2.13-1. Florida Safety Belt Law

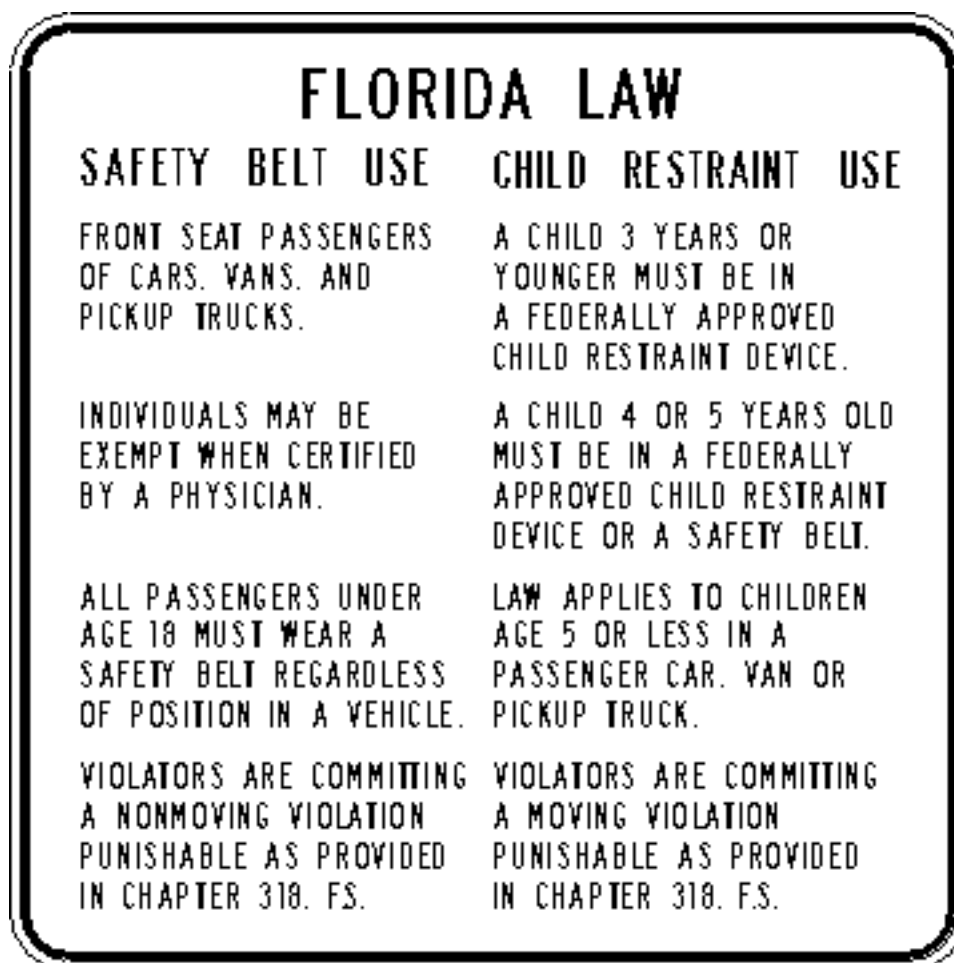

- (2) On the exit from these rest areas and Welcome Centers, the existing “Buckle Up” sign shall be replaced with the FLORIDA SAFETY BELT AND CHILD RESTRAINT LAW sign (*FTP-45-06*), as signs need to be replaced.

2.13.5 OTHER LOCATIONS

The FLORIDA SAFETY BELT AND CHILD RESTRAINT LAW sign (*FTP-44-06 and FTP-45-06*) may be used at other locations on the State Highway System at the discretion of the District Traffic Operations Engineer but should be limited to locations where:

- (1) There is documented evidence of a high crash location; or
- (2) A high percentage of the traffic is composed of tourists or visitors; and

- (3) The sign will not interfere or detract from existing regulatory, guide, or warning signs or other traffic control devices.

2.13.6 STANDARD SAFETY BELT SIGN (*FTP-46-06 AND FTP-47-06*)

- (1) This sign is to be used for general education purposes.
- (2) The 36 x 48 inch sign (*FTP-46-06*) should be installed on limited access facilities at county lines, based on space available. The District Traffic Operations Engineers may also install this sign where there is a documented need.
- (3) The 24 x 30 inch sign (*FTP-47-06*) is to be installed on non-limited access highways and urban areas, based on space available and where there is a documented need.

2.13.7 SIGN DESIGN

- (1) Specific sign details for all signs referenced in this section are shown in the [*Department's Design Standards, Index Number 17355.*](#)
- (2) Electronic details for all the signs in this section are available from the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Regulatory/Regulatory.shtm>

2.13.8 SIGN AVAILABILITY

Maintenance may obtain new or replacement signs by requisition from the Lake City Sign Shop.

Section 2.14

SIGNING FOR EVACUATION ROUTES

2.14.1 PURPOSE

To establish a uniform basis for installing and maintaining evacuation route signs on the State Highway System.

2.14.2 BACKGROUND

- (1) Emergency management officials requested the Department to install and maintain evacuation route signs on those portions of the State Highway System that comprise official evacuation routes to educate motorists as to the available routes and to ensure that signs are in place well in advance of the actual need to guide motorists away from high risk areas.
- (2) The Secretary of Transportation determined that evacuation route signs would be installed and in place on the State Highway System prior to the hurricane season (June through November). The Department of Community Affairs, Division of Emergency Management, the Department of Law Enforcement, the Florida Highway Patrol, the Department's State Safety office, and the Florida counties collectively developed statewide regional evacuation plans. Each regional plan includes the Traffic Management Element (routes and manpower), a sheltering element, and the public information element. The regional evacuation plans move evacuees from a high-risk location to a specific safer location (shelter, family residence, etc.).

2.14.3 PROCEDURE

- (1) The State Traffic Operations Engineer will obtain a hurricane regional evacuations plan showing the approved routes and a listing of County Emergency Management Directors for the Department's Emergency Coordinating Officer, and shall forward them to the appropriate District Traffic Operations Engineer.
- (2) The District Traffic Operations Engineer shall initiate the actions necessary at the district level to implement these guidelines and that evacuation routes are properly and promptly signed. District Maintenance will ensure that the signs are installed and maintained in the field.
- (3) The District Traffic Operations Engineer shall contact the County Emergency Management Director and coordinate state signing efforts through the Emergency Management Director with the appropriate local governments.

- (4) Subsequent signing changes necessitated by the [Division of Emergency Management](#) approved changes in evacuation routes shall be handled by the District Traffic Operations Engineer upon request of the regional counties coordinated through the Department's Emergency Coordination Officer.
- (5) Technical questions regarding evacuation routes may be directed to the Department's Emergency Coordinating Officer (State Safety office).

2.14.4 SIGN DESIGN

- (1) The EVACUATION ROUTE sign shall conform to the [Department's Design Standards, Index No. 17355](#).
- (2) A 24-inch diameter sign (**FTP-79-06**) may be used by local governments to indicate roads or streets under local jurisdiction as official evacuation routes.
- (3) The 24-inch diameter sign (**FTP-79-06**) shall be used by the Department to indicate roads on the State Highway System as official evacuation routes. A 36-inch diameter sign (**FTP-78-06**) shall be used on limited access highways.
- (4) Electronic sign details are available at the Department's Sign Library at the following website:

http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist_Srvc/Motorist_Service.shtm

2.14.5 SIGN USE

- (1) The EVACUATION ROUTE sign shall be used exclusively to sign along regional evacuation routes that have been so designated on the approved statewide regional evacuation route plans recorded by the Department of Community Affairs, Division of Emergency Management.
- (2) The EVACUATION ROUTE sign shall be used to guide motorists along the regional evacuation routes to shelter destinations away from potential high-risk areas; i.e., signs shall be posted to guide traffic along the approved routes.
- (3) The sign shall comply with applicable provisions of the [Section 2N.03 of the MUTCD](#).

2.14.6 SIGN PLACEMENT

- (1) Signs shall be placed in accordance with existing Department standards and be consistent with the [Section 2N.03 of the MUTCD](#) and safety criteria.
- (2) The EVACUATION ROUTE sign shall be erected 150 to 300 feet in advance of, and at any turn in an approved evacuation route and elsewhere for straight-

ahead confirmation, if needed. The signs shall be mounted according to height and lateral clearances specified in the [Department's Design Standards, Index No. 17302](#).

2.14.7 SIGN INSTALLATION

- (1) Signs shall be furnished, installed, and maintained by the Department on official evacuation routes that are on the State Highway System.
- (2) Signs shall be installed only at locations reviewed and approved by the District Traffic Operations Engineer to insure that such signs do not interfere with existing traffic control devices.

2.14.8 SHELTER AND TRAVELER INFORMATION SIGNING

- (1) The statewide emergency evacuation plan must compliment both local and regional evacuation plans. In order to assist in this effort, shelter signing and emergency evacuation traveler information is included in this section.
- (2) The State Traffic Operations Engineer will coordinate, address, and implement operational concerns on evacuation route signing and related operational needs with the Safety office and other offices within the Department and with the Department of Community Affairs, Division of Emergency Management.
- (3) The District Traffic Operations Engineers will coordinate evacuation shelter signing efforts on a districtwide basis. If signing for shelters or evacuation traveler information is required, the use of the signs must be included in the CEMP (**C**omprehensive **E**mergency **M**anagement **P**lan) area/regional evacuation plan. The plan should assign responsibility for turning the "flip up" signs up during emergency conditions, and back down when conditions return to normal.
- (4) Shelter signing will be installed on limited access highways at key locations. The location determination shall be a joint effort between the District Traffic Operations Engineer and the local agencies.
- (5) Signs will be installed under the following conditions:
 - (a) the shelter location is part of the regional plan;
 - (b) the local agency shall purchase the signs;
 - (c) the local agency shall be responsible to "flip-up" or "flip-down" the signs pursuant to their needs.


2.14.9 SHELTER SIGN DESIGN AND USE

- (1) The color for shelter signs will be blue background with white legend and directional arrow.
- (2) The type of shelter signing support used on the State Highway System, portable (temporary), or permanent, will be determined by the District Traffic Operations Engineer.
- (3) The sign designs for shelters are shown in **Figure 2.14-1** for permanent signing and **Figure 2.14-2** for temporary. The permanent design will use a “flip up” design as shown in **Figure 2.14-3**. This means the bottom panel will be flipped up to reveal the shelter message. The Safety Belt Symbol Sign shall be used as the default message for shelter signs.

2.14.10 TRAVELER INFORMATION SIGNING DESIGN AND USE


- (1) The Traveler Information sign shall have a blue background with a white legend. The exact sign detail is shown in **Figure 2.14-4**.
- (2) When the local/regional CEMP plan includes the use of traveler information on local shelters and other evacuation information, and a local radio station has a written agreement to be the official traveler information station, the frequency of the station may be signed for on the interstate system. This can be done with Changeable Message Signs, or with permanent flip up signs as shown in **Figure 2.14-3**. A default message for the “flip up” sign shall be the Safety Belt Symbol sign.

Figure 2.14-1. Permanent Shelter Signing

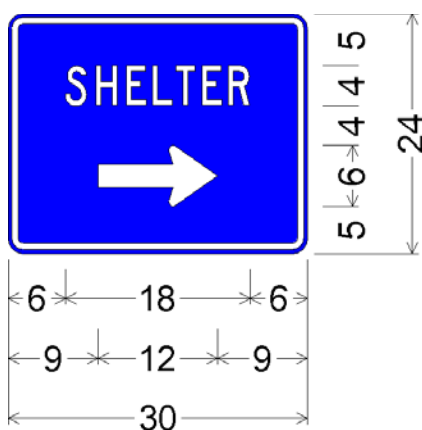

Portable Shelter Sign;
2" Radius, 1" Border, 0" Indent, White on Blue;
"SHELTER" C;
Standard Arrow Custom 12" X 6" 0°;

Figure 2.14-2. Portable Shelter Sign

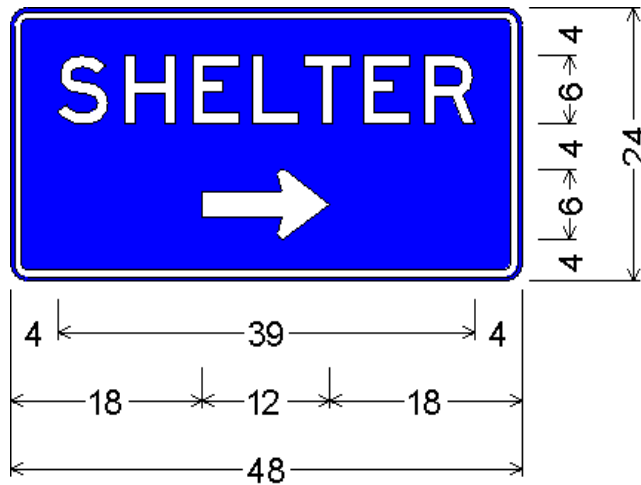

Portable Shelter Sign;

2" Radius, 1" Border, 0" Indent, White on Blue;

"SHELTER" E;

Standard Arrow Custom 12" X 6" 0°;

Figure 2.14-3. Flip Up Sign


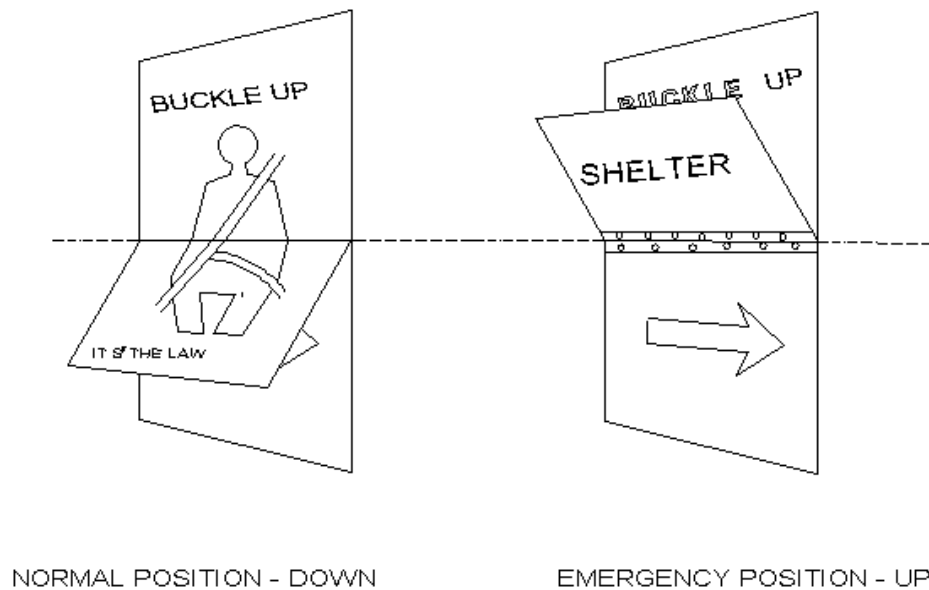


Figure 2.14-4. Traveler Information Sign

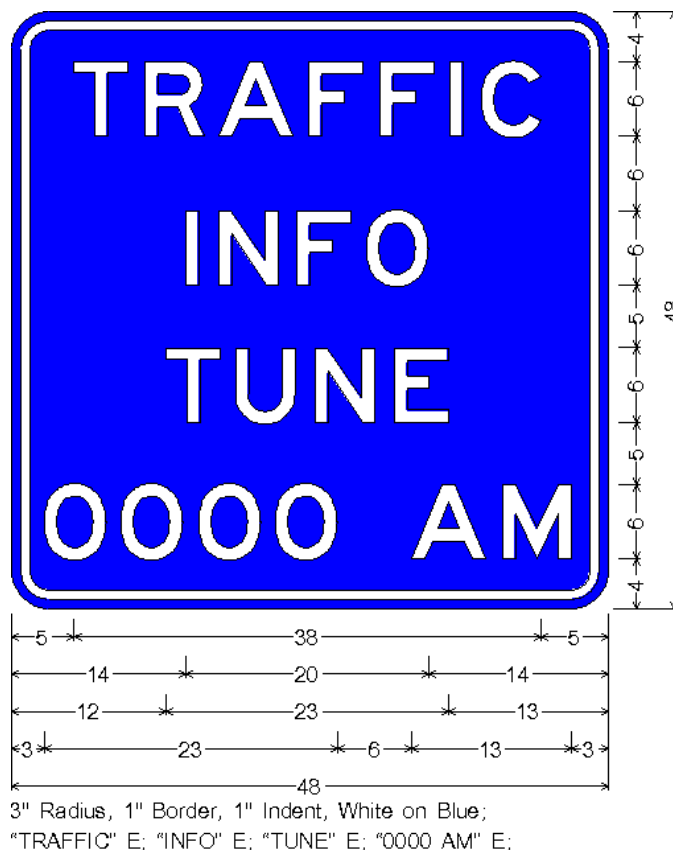

2.14.11 CONTINUOUS HINGE REQUIREMENTS

The continuous hinge shall be of stainless steel, with minimum .060-inch leaf thickness, 2-inch open width and .120 pin diameter. The hinge shall be attached to the aluminum sign panels with 1/8-inch stainless steel pop rivets installed on 4-inch centers for the width of the sign. The pin must be permanently located in place by shortening the pin at each end of the hinge and staking the ends of the two outboard knuckles.

Two sources for these hinges are:

H.A. Guden Co.	(800) 344-6437	FAX (516) 737-2933
Stanley Co.	(800) 622-4393	FAX (800) 445-5723

2.14.12 RADIO FREQUENCY INFORMATION SIGNS

The addition of radio frequency information signs along evacuation routes on the State Highway System has been approved by the Department as an important communication link for public safety during evacuation periods. The addition of these signs was made possible when Florida Public Radio Stations volunteered to partner with other state and local agencies in the state's evacuation efforts.

2.14.12.1 Radio Frequency Information Sign Design

The electronic sign details for the radio frequency signs (for both limited and non-limited access highways) are available in the Department's Sign Library at the following website:

http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist_Srvc/Motorist_Service.shtm

2.14.12.2 Radio Frequency Information Sign Placement

- (1) The Radio Frequency Information Sign (**Figure 2.14-5**) will be placed at the following locations:
 - (a) All limited access highways classified as evacuation routes.
 - (b) Principal non-limited access highways in areas where limited access highways are not the main evacuation routes.
 - (c) Principal non-limited access highways that are critical links leading to limited access highways.
- (2) Limited access highways will consist of a **FTP-78-06** sign and a 36 x 24-inch Radio Frequency Information sign (**FTP-71-06**). Exact sign details can be found in the [Department's Design Standards, Index 17355](#).
- (3) This sign assembly will be positioned near county lines (where radio coverage is present) and where radio frequency coverage change. When overlap occurs, the frequency motorists would be driving into is the correct frequency to sign.


Figure 2.14-5. Radio Frequency Information Sign



- (4) Evacuation routes on the State Highway System non-limited access highways are signed with the **FTP-79-06** sign. A 24 x 18-inch Radio Frequency Information sign (**Figure 2.14-5**) will be attached to the existing sign assembly in the above mentioned locations erected close to the county lines or coverage area changes are to be modified with the addition of the radio frequency panel. Additional locations to be modified are the beginning and termination points of qualifying links.
- (5) Electronic details for these signs can be found in the Department's Sign Library at the following website:

[http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist Srvc/Motorist Service.shtm](http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist%20Srvc/Motorist%20Service.shtm)
- (6) When long segments occur on both limited access and non-limited access highways, confirmation signs should be installed at 10-mile increments.
- (7) **Figure 2.14-6** represents the general statewide radio coverage area for this program.

Figure 2.14-6. Radio Coverage Area

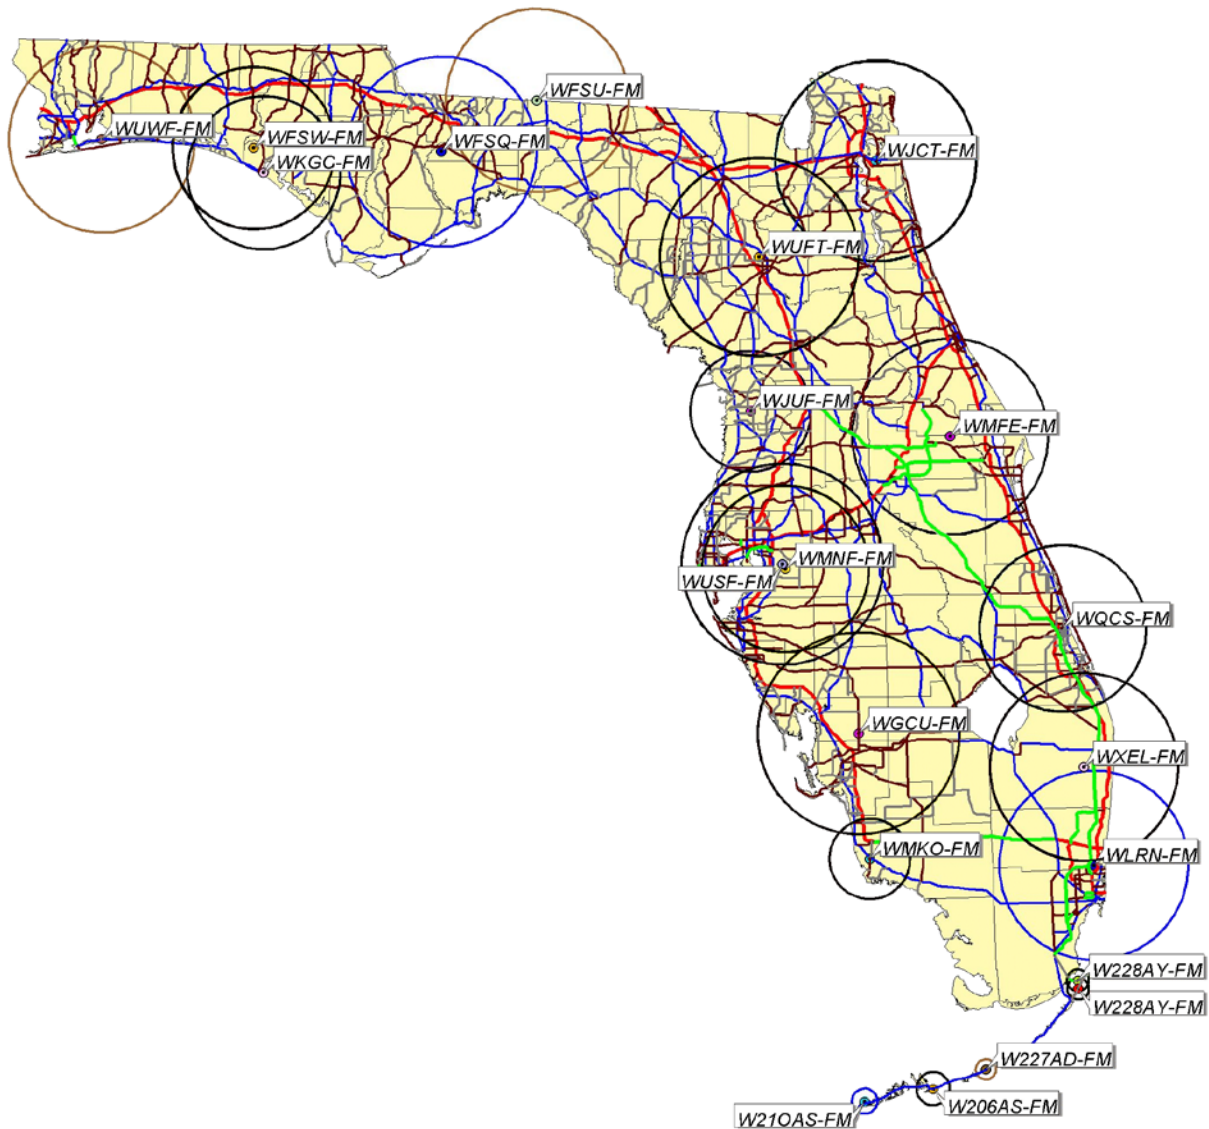

Note: WXEL-FM call letters have changed to WPBI-FM
WFIT-FM has been added to the Florida Public Broadcast membership.

2.14.12.3 Radio Frequency Information Sign Installation

- (1) Exact sign locations are to be determined by the [District Traffic Operations Engineer](#). Work orders should be prepared using the usual procedures for installation by Department Maintenance forces.
- (2) The signs shall be mounted according to height and lateral clearances specified in the [Department's Design Standards, Index No. 17302](#).

- (3) In some cases, the mounting height resulting from attaching an additional panel to an existing sign may be less than the required 7 feet. In rural roadside areas, this situation still meets requirements; however, in urban areas where pedestrians are present, the support must be modified to maintain the required height.

2.14.13 EVACUATION SIGN MESSAGES

The standardization of messages is needed to provide uniform information to motorists during emergency evacuations throughout the State. Standard messages for Changeable Message Signs (CMS) both portable and fixed, and standard static signs are to be used only during emergency evacuations when orders are issued to implement either shoulder or one-way operation on limited access highways in Florida. Guidance for the operation of Changeable Message Signs, both portable changeable message signs (PCMS) and the permanent mount dynamic message signs (DMS), is found in [Section 2L \(Changeable Message Signs\) of the MUTCD](#).

2.14.13.1 Shoulder Operation

- (1) Shoulder operation shall not be used when the one-way operation is in effect and operational.
- (2) Both phases of the CMS message for the Shoulder Operation Begin Here sign is shown in **Figure 2.14-7**. This sign is to be used at specific locations where the use of the shoulder for through traffic is allowed during an emergency evacuation.

Figure 2.14-7. Shoulder Operation Begin Here Sign (CMS)	
Phase 1	Phase 2
TRAFFIC	BEGIN
USE	HERE
SHOULDER	


- (3) Both phases of the CMS message for the Shoulder Operation Must Exit sign is shown in **Figure 2.14-8**. This sign is to be used to terminate the use of the shoulder for through traffic.

Figure 2.14-8. Shoulder Operation Must Exit Sign (CMS)	
Phase 1	Phase 2
SHOULDER	MUST
TRAFFIC	EXIT AT
	EXIT XXX

- (4) The Use of the Shoulder to Exit sign is shown in **Figure 2.14-9**. This static sign is to be used in advance of an interchange exit to inform motorists to use the

shoulder to exit. This sign shall be 48 inches wide with a black legend and yellow background. The sign shall be located on the right shoulder in advance of the exit ramp in accordance with the emergency evacuation implementation plans.


Figure 2.14-9. Use Shoulder to Exit Sign (Static)

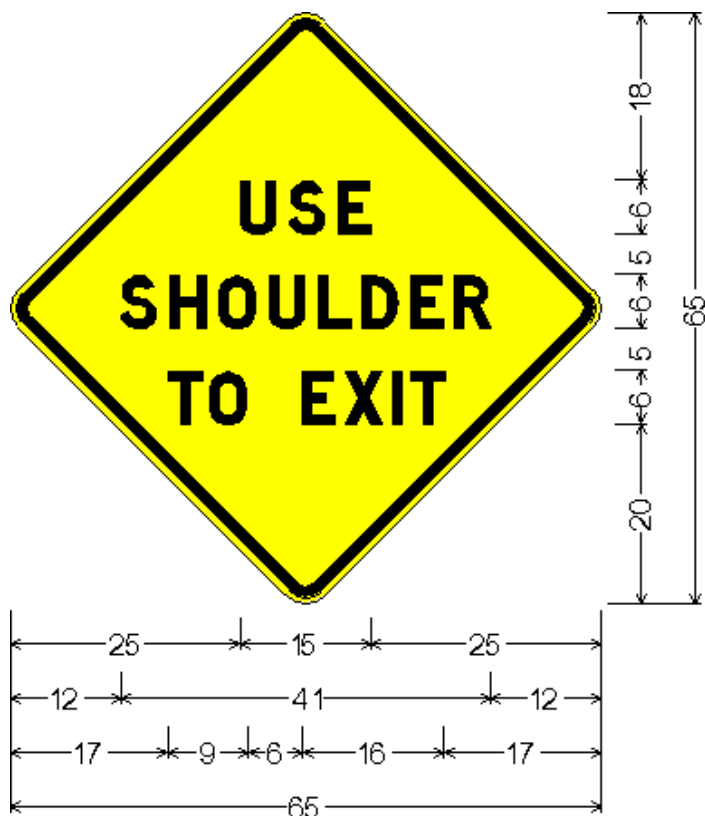

Use Shoulder to Exit Sign;
 48" across sides 3" Radius, 1" Border, 1" Indent, Black on Yellow;
 "USE" D; "SHOULDER" D; "TO EXIT" D;

- (5) The Traffic Using Shoulder sign is shown in **Figure 2.14-10**. This static sign shall be used on the entrance ramp to WARN motorist that the limited access highway shoulder is being used for through traffic. The sign is to be located on both the right and left side of the roadway near the beginning of the entrance ramp. This sign shall be 48 inches wide with a black legend and yellow background.
- (6) The No Merge Lane Ahead sign shown in **Figure 2.14-11**. This static sign shall be used to warn motorists that there is **no** room to merge onto the limited access highway. This sign shall be 48 inches wide with a black legend and yellow background. The sign is to be located on both the right and left sides of the ramp, before the entrance ramp gore.

Figure 2.14-10. Traffic Using Shoulder Sign (Static)

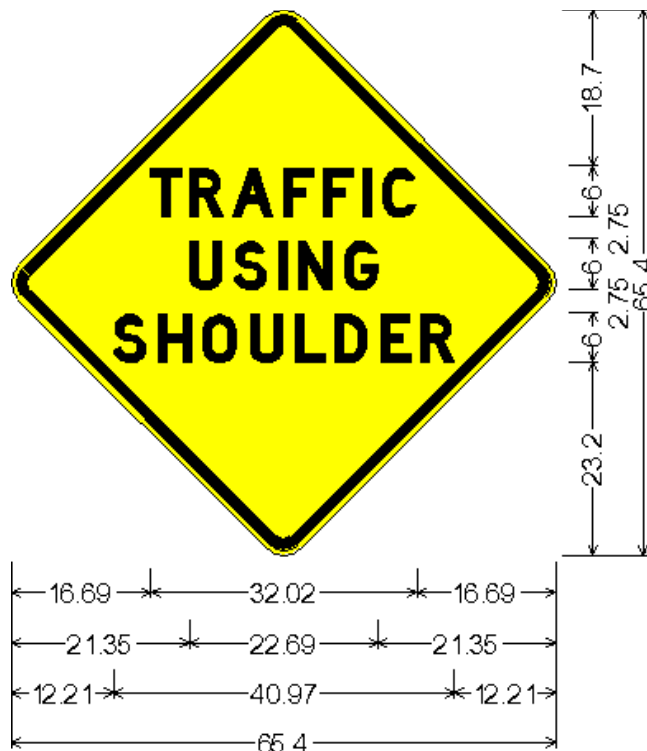

Traffic Using Shoulder Sign;

48.00" across sides 3.00" Radius, 1.25" Border, 0.63" Indent, Black on Yellow;


"TRAFFIC" D; "USING" D;

"SHOULDER" D;

2.14.13.2 Changeable Message Signs (CMS)

- (1) The flashing of any CMS legend is prohibited. There shall not be more than two phases displayed on any CMS.
- (2) All CMS signs used (both portable (PCMS) and permanent (DMS)) shall be on the [Department's Approved Product List](#).

Figure 2.14-11. No Merge Lane Ahead Sign (Static)

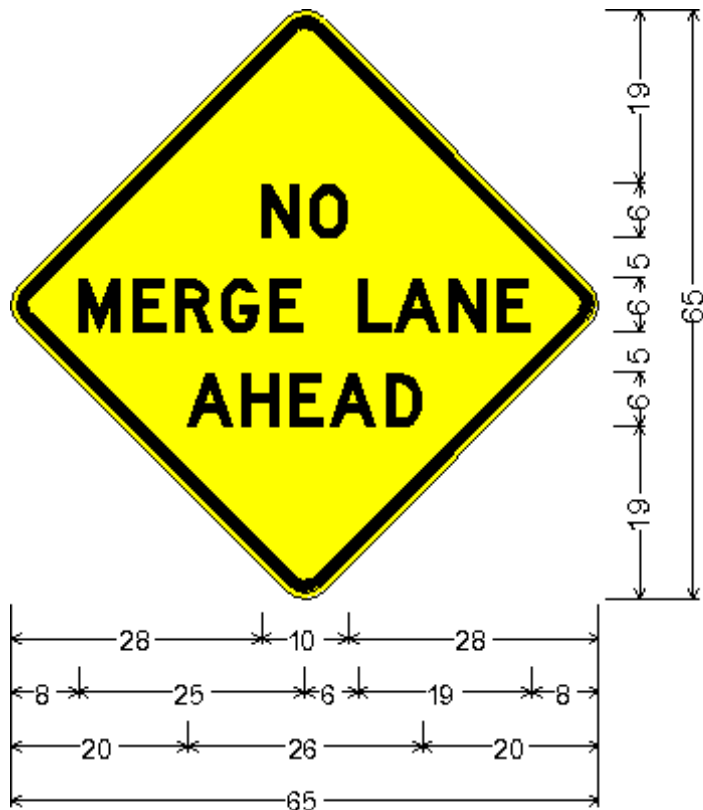

No Merge Lane Ahead Sign;
48" across sides 3" Radius, 1" Border, 1" Indent, Black on Yellow;
"NO" D; "MERGE LANE" D; "AHEAD" D;

2.14.13.3 Location of DMS and Static Signs

- (1) The exact location of the DMS and static signs will be determined as part of the emergency evacuation implementation plans for limited access highways that are developed in each District.
- (2) Static signs shall be mounted according to height and lateral clearances specified in the [Department's Design Standards, Index No. 17302](#).

Section 2.15

SMOKE ON HIGHWAY SIGNS

Note: This section is currently undergoing revisions and will be finalized and updated as soon as it is complete.

2.15.1 GENERAL

- (1) The occurrence of fires in proximity to highways in Florida often creates safety hazards to motorists. These fires can be wildfires or controlled burns under prescribed conditions. In virtually every case, Florida Department of Agriculture and Consumer Services, Division of Forestry (DOF) officials are most knowledgeable about the location and seriousness of the situation.
- (2) A Highway Safety Smoke Management Interagency Agreement has been developed between DOF, FDOT and the Florida Highway Patrol (FHP) to provide a cooperative effort to warn the public about roadway visibility hazards resulting from wildfires and prescribed burns.
- (3) Several years ago portable temporary smoke warning signs were provided by the FDOT for use by DOF officials. These signs are to be used in emergency situations where smoke creates a hazard to motorists. This section of the Traffic Engineering Manual describes this practice and documents the authority of the DOF to erect temporary signs when there is smoke present from either wildfires or prescribed burns on the State Highway System.

2.15.2 TEMPORARY SMOKE ON THE HIGHWAY SIGN

- (1) Each Forest Area Supervisor employed by the DOF is authorized to approve the placement of portable sign assemblies warning motorists of smoke on the State Highway System. These signs should be erected when there is sufficient smoke present to create a safety concern to motorists.
- (2) The signs and support hardware must comply with Department standards and shall consist of a portable wind resistant stand and roll-up 48-inch non-reflective sign with Series C Lettering. The electronic sign detail is available in the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/WarningWarning.shtm>

2.15.3 PRESCRIBED BURN SIGN

- (1) Retro-reflective, non-temporary signs are to be used for prescribed burns. These are burns that are pre-planned and approved through the DOF authorization process. The signs will be supplied, erected, and removed by the person planning and executing the burn.
- (2) The person(s) planning and executing the prescribed burn shall provide a decal on the back of the sign which has both the contact information and the date the sign was placed on the State Highway System.
- (3) Person(s) planning and executing a prescribed burn will contact the applicable FDOT Maintenance yard to notify them that signs are being placed on the State Highway System roadways in anticipation of a burn. The information given to the maintenance yard shall include the exact time and location of the signs and contact information for the persons conducting the burn.
- (4) It is the responsibility of the person planning and executing the prescribed burn to contact Call Sunshine (1-800-432-4770) 48 hours prior to installing the signs to insure no conflict with existing utilities.
- (5) The sign used for prescribed burns will contain black lettering on a yellow retro-reflective background with Series C Lettering. Sign materials shall comply with the current edition of the [Section 994 of the Department's Standard Specifications](#).
 - (a) The sign size shall be a 36-inch diamond shape when installed on roadways posted at 50 mph or less.
 - (b) The sign size shall be a 48-inch diamond shape when installed on roadways posted at 55 mph or greater.

Electronic sign details are available at the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Warning/Warning.shtm>

- (6) Sign sheeting shall be Type IIIA, IIIB, or IIIC, fastened to an aluminum substrate at least 0.080 thick. Signs shall be mounted in accordance with the current edition of the [Department's Design Standards, Index No. 600, Sheet 6 of 13](#) using round aluminum or steel channel as follows:

Aluminum:	3.5" x 3/16"
Steel channel:	two 3.0# at 2'-6" center to center

Using 2-I and 1-II brackets.

- (7) Mounting heights and lateral clearances should adhere to those specified in the current edition of the [Department's Design Standards, Index No. 17302](#):

Case II (rural locations) Sign edge 12' minimum from driving lane edge
Case V (urban locations) Sign edge 2' minimum from face of curb

2.15.4 SIGN INSTALLATION AND REMOVAL

- (1) The signs shall be installed 1/2 mile in advance of the hazard area in both directions to allow motorists sufficient time to react to the sign message. Signs shall be double-mounted on divided highways.
- (2) The appropriate FHP Troop Headquarters shall be notified within the shortest possible time, not to exceed one (1) hour, when the appropriate smoke on highway signs are used so that coordinated efforts can be developed.
- (3) It is important to note where and when the signs were placed. Due to the fact that smoke moves, frequent monitoring is needed to assure proper placement.
- (4) Conditions must be monitored and the signs removed when conditions improve to the extent where these signs are not needed. The removal of these signs shall be done by DOF personnel or FDOT Maintenance forces, whoever erected the sign, with coordination with the FHP.

Section 2.16

SUPPLEMENTAL GUIDE AND MOTORIST SERVICES SIGNS ON LIMITED AND NON-LIMITED ACCESS HIGHWAYS

This section has been rescinded since it is now adopted as Florida's Highway Guide Sign Program in Rule Chapter 14-51, F.A.C. and can be viewed at the following website:

http://www.dot.state.fl.us/TrafficOperations/pdf/Rule_Chapter_14-51_FAC_11_24_11.pdf

Section 2.17

EMERGENCY HIGHWAY TRAFFIC PLAN

This section of the TEM has been rescinded and replaced with the [Emergency Management Program \(Topic Number 956-030-001\)](#) which is sponsored by the Emergency Management Office.

Section 2.18

*FHP HIGHWAY ASSISTANCE PROGRAM

2.18.1 PURPOSE

- (1) The *FHP (347) Highway Assistance Program is a statewide program where motorists wishing to report highway related information to the Florida Highway Patrol, or summon roadside assistance in a Road Ranger service area, can do so by using their cellular phone. Signs will be erected to inform motorists of the cellular phone number.
- (2) The signing program will extend to all Interstate, Toll, U.S. Routes, and other major State Highway System roadways throughout the state.

2.18.2 SIGN LOCATION

The location of these signs should correspond to areas where cellular service is available. The service is available in all counties of the state; however, there are areas in some counties which are not covered.

2.18.3 SIGN DESIGN AND INSTALLATION

- (1) The *FHP sign (**FTP-43-06**) is 48 x 48 inches, has a white legend on blue background, and the exact sign detail is shown in the [Department's Design Standards, Index No. 17355](#).
- (2) The electronic detail for this sign is available from the Department's Sign Library at the following website:

http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist_Srv/Motorist_Service.shtm
- (3) The *FHP sign has been revised to provide motorists the number interpretation of FHP (347), in order to quicken the calling process. This new sign design will be used on all new projects and as signs need to be replaced.
- (4) Mounting heights and lateral clearances should adhere to those specified in the [Department's Design Standards, Index No. 17302](#) and support systems shall meet or exceed Department standards of frangibility.
- (5) Specific sign placement details should be developed by District Traffic Operations Offices using the following guidelines.

2.18.3.1 Interstate and Other Limited Access Routes

- (1) At state and county lines
- (2) At approximately 30 mile intervals
- (3) Following major freeway to freeway interchanges

2.18.3.2 Major Arterial Routes

- (1) At state and county lines
- (2) At approximately 30 mile intervals
- (3) Downstream from intersections formed by junctions of U.S./Major State Highway System roadways

2.18.4 SIGN AVAILABILITY

Maintenance may obtain new or replacement signs by requisition from the Lake City Sign Shop.

Section 2.20

CALL BOX/MILE MARKER SIGNS

This section has been rescinded in accordance with the *Department's DME Memo 13-05, Call Box Removal Plan*. Information on the use of reference markers can be found in *Section 2.28 of the TEM*.

Section 2.21

FLORIDA LITTER LAW SIGNS

2.21.1 PURPOSE

In 1988, the Legislature enacted the ***Solid Waste Act*** which provided for a comprehensive solution to Florida's solid waste problems by involving state and local governmental entities and the private sector. ***Section 55 of the Solid Waste Act*** provided that there must be a coordinated effort to a cleaner environment through sustained programs of litter prevention. Subsection 5 provided that the Department of Transportation must place signs discouraging litter at all off-ramps on the interstate highway system.

2.21.2 SIGN DESIGN AND PLACEMENT

- (1) The FLORIDA LITTER LAW sign is to be installed in compliance with [Section 403.413\(4\), F.S.](#)
- (2) The Department shall install the FLORIDA LITTER LAW sign (***FTP-41-06***) on interstate off-ramps as required by statute. They should be installed a minimum of 100 feet in advance of the first motorist services sign, or a minimum of 100 feet in advance of directional signs on the off-ramps without motorist service signs.
- (3) The off-ramp sign shall be 30 x 36 inches with a white background and black legend (***FTP-41-06***). The specific sign detail is shown in the [Department's Design Standards, Index 17355](#).
- (4) The Department may also install the FLORIDA LITTER LAW sign (***FTP-40-06***) on the interstate where there is excessive littering. This sign shall be 42 x 48 inches with a white background and black legend. The specific sign detail is shown in [Department's Design Standards, Index 17355](#).
- (5) Electronic sign details are available at the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Regulatory/Regulatory.shtm>

2.21.3 SIGN INSTALLATION

- (1) Installation of these signs should be completed through the normal methods of locating the sign positions and notifying District Maintenance. Maintenance will order the signs from the Sign Shop and install them.
- (2) The FLORIDA LITTER LAW sign (**FTP-41-04**) may also be installed on the State Highway System either by the [District Traffic Operations Engineer](#) or by local government through the Department's permit process.
- (3) Mounting heights and lateral clearances should adhere to those specified in the [Department's Design Standards, Index No. 17302](#) and support systems shall meet or exceed Department standards of frangibility.

Section 2.22

TRAFFIC CONTROL FOR TOLL COLLECTION FACILITIES

The Department's standards for this section are now referenced in the Turnpike Plans Preparation and Practices Handbook (TPPPH). The TPPPH can be accessed at the following website:

http://design.floridasturnpike.com/prod_design/tppph/2011/tppph2011.html

Section 2.23

FLORIDA'S TURNPIKE AND TOLL ROAD NUMBERING AND SIGNING PROGRAM

2.23.1 PURPOSE

To establish standards for systematic numbering and signing of Florida's emerging toll road system.

2.23.2 BACKGROUND

- (1) Florida's toll road system was originally made up of a complex network of locally developed expressways and the Florida Turnpike. The toll roads were developed largely through the efforts of local expressway authorities to serve regional transportation needs, seldom extending into adjacent counties. As locally funded and developed projects, the expressway's authorities developed a sense of community ownership for the toll road and gave it a locally pleasing name. These names have traditionally been used when referring to the roadway even though state road numbers were assigned to each facility.
- (2) [Section 338.001, F.S.](#) which has created an intrastate highway system, changed the local flavor of the toll roads. Now considered a major component of the intrastate system, the toll roads perform a necessary function in transporting the motorist through urban areas in the shortest possible time. Consequently, the Turnpike District of the Department is responsible for the administration and expansion of many of the toll roads. Some of these are already open, others are in the planning stages.
- (3) As toll roads have expanded and developed over time into a statewide toll network, a systems approach has been adopted to include connections to other systems. This includes accessibility to local streets, county roads, state system routes, and connections between other limited access systems. An integral part of this interconnected system is the road numbering and signing program.


2.23.3 ROAD NUMBERING PROGRAM

- (1) Because of the expanding size of the toll system, the convention of identifying toll roads only by local names is not acceptable. The high number of toll roads and their interconnected nature causes navigation problems for tourists and other non-familiar motorists. A worst case can develop where one expressway joins another and the route name suddenly changes without changing roadways. The

solution is to use a route numbering system, similar to that used on interstate routes, U.S. routes, and other state highways.

- (2) Local names or logos will be retained for identification and a local sense of ownership only. Local names or logos will continue to be used by resident motorists, but those not familiar with the local system will rely on the numbering system to navigate the statewide system of toll facilities.
- (3) The numbering system will be consistent with the statewide numbering systems for all state and county roads. In most cases the existing state road numbers will be used to refer to the toll roads. For new tollways, a number will be assigned by the Transportation Statistics Office, consistent with the official numbering program. In cases where future facilities will result in the completion of a loop or beltway, connecting a series of shorter toll road segments, a single road number will be retained, often requiring a change of road numbers on older links.
- (4) To express membership in the statewide toll system, and provide a consistent method of identification throughout the State, a sign has been developed (**Figure 2.23-1**) which depicts the toll road number on a unique sign shape. This sign is similar to an interstate shield and is used as a route marker and as part of the trailblaze assembly.

Figure 2.23-1. Toll Route Marker

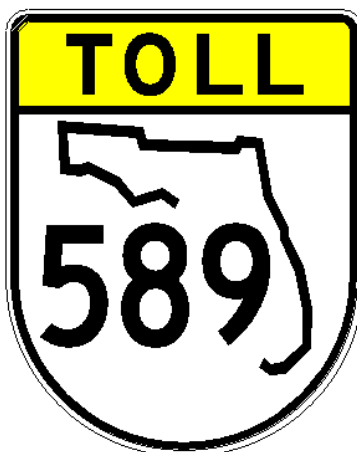

2.23.4 SIGNING PROGRAM

- (1) The toll route marker (**Figure 2.23-1**) is available in three sizes, depending on application. To identify the facility along the mainline a 48 x 60-inch toll route marker may be used. This sign may be used when leaving the toll plaza to confirm the route and also erected periodically along the mainline.

- (2) To maintain the local identity of the toll road, and provide for local area motorists, the toll road name or logo may be erected on a confirmation guide sign downstream from the mainline toll plazas. If used, the logo panel shall be furnished by the local expressway authority. These local name or logo signs are for identification purposes only. No attempt shall be made to use only the local toll road name or logo in guide signing, direction signing or trailblazing to the facility. A combination of route number signs and expressway names or logos may be necessary to accommodate local concerns, but the principal identification is the toll route marker.
- (3) To identify a toll facility at a freeway to freeway interchange, both the advance guide sign and exit direction guide sign shall use the 36 x 48-inch toll route shield. This size is available as an overlay, and should also be used in other freeway type guide signs and overhead direction sign applications. The local toll road name or 36-inch logo panel may be used in a guide sign or direction sign application. If used, this logo panel shall be furnished by the local expressway authority.
- (4) To identify a toll facility from a conventional road, (state, county, or local systems), or to provide trailblazing to a toll facility a 24 x 30-inch toll route marker shield shall be used in conjunction with the appropriate cardinal direction information, arrows, junctions, etc. The local toll road name or a 24-inch logo panel may be used in conjunction with the toll route marker. If used, this logo panel shall be furnished by the local expressway authority. Confirmation assemblies should be used in trailblazing beyond intersections of numbered routes.
- (5) Electronic sign details for these signs can be found at the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Guide/Guide.shtm>
- (6) Although trailblazing to toll facilities is an effective method of advertising for the facility, the intent of signing is to guide the motorist. The **MUTCD** is very specific on this issue. General limits on the maximum distance from a toll facility to parallel routes are recommended for rural and urban density development as follows.

2.23.5 RECOMMENDED MAXIMUM TRAILBLAZE DISTANCE

Rural density	5 miles
Urban density	2 miles

Due to the cost of signing and the possibility of overloading the motorist with information, the engineer must use care in locating these signs. Acceptable locations are along major parallel routes, and at the junction of roadways which have exits on the toll road.

2.23.6 LIMITED ACCESS SIGN DESIGNS

- (1) For general issues relating to guide signs and the use of regulatory and warning signs, the toll system shall be interpreted as functioning as a fully access controlled roadway with corresponding criteria such as clear zone requirements, letter height, sign placement, etc. (See [Section 2E.02 of the MUTCD](#)). The engineer must keep in mind that this level of signing is purposefully kept simple and dignified, using large lettering, and concise messages that can be read, comprehended, and acted upon while traveling at a high rate of speed.
- (2) The procedures used for guide sign sequences shall be as for other limited access facilities. The use of supplemental guide signs for traffic generators shall follow [Rule 14-51.020, F.A.C.](#)

Section 2.24

PLACEMENT OF CRIME WATCH SIGNS ON THE STATE HIGHWAY SYSTEM

2.24.1 PURPOSE

To aid districts in evaluating and responding to requests for erecting Crime Watch Signs within the State Highway System rights-of-way.

2.24.2 DEFINITIONS

Crime Watch Sign. A sign used to identify a neighborhood, community, or other geographical area within which there exists a Crime Watch Program.

2.24.3 BACKGROUND

- (1) Crime prevention is an issue of critical concern to both government and its citizens. With the assistance of law enforcement agencies, local citizens have organized Crime Watch Programs to enhance the safety and security of persons and property within their communities. According to law enforcement officials, the erection of Crime Watch Signs indicative of the adoption of a Crime Watch Program can be a deterrent to crime. Generally, local governments erect these signs along residential streets and in business districts.
- (2) Crime Watch Signs shall not be considered official traffic control devices and accordingly are not governed by the [MUTCD](#). However, they do aid in law enforcement and contribute to public safety.

2.24.4 REQUESTS FOR SIGNING

- (1) Requests for permitting the erection of Crime Watch Signs within State Highway System rights-of-way should be reviewed by the District Traffic Operations Engineer.
- (2) Only requests submitted by local government traffic engineering or law enforcement agencies should be considered. Others should be referred to their local governmental agencies.

2.24.5 SIGN LOCATIONS

- (1) Crime Watch Signs may be permitted along a state highway only in the vicinity of strip residential or commercial development which is directly accessed from the state highway.
- (2) Crime Watch Signs should not be permitted on state highway right-of-way when the area of concern is adequately served by side streets connecting to the state highway. In such cases, the signs should be placed on the side street right-of-way and be readily visible to someone entering the side street from the state highway.
- (3) Excessive posting of Crime Watch Signs along a state highway should not be permitted. Prudent judgment must be exercised in reviewing signing strategies with respect to the spacing of successive signs. For example, on highways passing through isolated small rural or suburban communities, single signs at the limits of the communities may be appropriate. In heavily developed areas, additional signs at moderate spacing may be needed.
- (4) Crime Watch Signs shall not be permitted in a location where the view of existing traffic control devices may be obscured or where they might otherwise compete for the motorists' attention (e.g., next to a STOP Sign).

2.24.6 SIGN DESIGN AND PLACEMENT

- (1) Since Crime Watch Signs are not official traffic control devices, requests for the Department to design or establish standards for these signs should be declined. However, the District Traffic Operations Engineer should review sign designs proposed for use on the State Highway System. Designs which resemble an official traffic control device or which may be confusing to or misconstrued by the motorists should be rejected.
- (2) Sign designs should be simple and dignified, devoid of any advertising. Panel design and quality should be adequate to maintain a high level of appearance and legibility under anticipated environmental conditions, both day and night.
- (3) Mounting heights and lateral clearances should adhere to those specified in the [*Department's Design Standards, Index No. 17302*](#) and support systems shall meet or exceed Department standards of frangibility.
- (4) Crime Watch Signs shall not be affixed to any sign support maintained by the Department.

2.24.7 INSTALLATION AND MAINTENANCE

- (1)** A local governmental agency must agree to assume full responsibility for the installation and maintenance of any Crime Watch Signs permitted by the Department for installation on the State Highway System.

- (2)** The installing agency should be advised that the Department reserves the right to remove any Crime Watch Signs not in conformance with these instructions or which are not properly installed or maintained.

2.24.8 SPECIAL CONSIDERATIONS

Unusual requests or designs, or problems associated with Crime Watch Signs on the State Highway System should be discussed with the State Traffic Operations Engineer prior to permitting.

Section 2.25

DISTANCE SIGNING FOR NON-LIMITED ACCESS HIGHWAYS

2.25.1 PURPOSE

To establish a consistent distance signage system for all non-limited access state roads in conformance with [Sections 2D.41](#) and [2D.42 of the MUTCD](#).

2.25.2 BACKGROUND

- (1) [Section 2D.37 of the MUTCD](#) does address the application of distance signage. However, there is no statewide procedure for distance signage on non-limited access roads. This perpetuates the situation of signing for a destination on a non-limited access state road that may be several hundred miles away. Also, the current distance signage practice does not take into consideration the use of Interstate and Florida's Turnpike System for long distance driving by motorists.
- (2) The Department's current non-limited access distance signs do not provide adequate destination information for motorists who are looking for the variety of tourist attractions which are accessible from non-limited access highways in addition to destinations accessible from the Interstate and Florida's Turnpike System.

2.25.3 PROCEDURE

- (1) Distance signs should have the names of three cities, towns, significant geographical identity, route, or community, and the distance (to the nearest mile) to those places.
- (2) The top name should be the next place on the route having a post office, railroad station, route number (name) of an intersecting highway, or other significant geographical identity.
- (3) The middle name should be used to indicate communities along the route or important route junctions. This name may be varied on successive distance signs to give motorists maximum information concerning communities along the route to the next control city.
- (4) The bottom name must a major destination control city. The control city should remain the same on all successive distance signs throughout the length of the route until that destination qualifies to be the top or middle name on the distance sign. Once the control city moves up, the next control city must be shown as the

bottom name. There should always be a control city shown as the bottom name.

- (5) **Figures 2.25-1, 2.25-2, 2.25-3, and 2.25.4** are examples of distance signs for non-limited access highways.
- (6) Placement of distance signs are specified in [Section 2D.42 of the MUTCD](#).
- (7) Control cities have populations of 10,000 or more and include county seats. A matrix that includes the centroid defined for each municipality on the list can be found on the [Intercity Mileage Spreadsheet](#), maintained by the Transportation Statistics Office.
- (8) The implementation of this distance signing program should be through normal construction projects. The District Traffic Operations Engineer must develop corridor distance signage plans for inclusion into existing work program projects. Stand-alone distance signage projects are not required or desired.

Figure 2.25-1

City "A"	5
Town "B"	10
Control City "A"	20

Figure 2.25-2

Town "B"	5
Control City "A"	15
Control City "B"	30

Figure 2.25-3

Town "B"	5
Control City "A"	15

Figure 2.25-4

Control City "A"	5
City "C"	10
Control City "B"	30

Section 2.26

ADVANCE GUIDE SIGNS ON LIMITED ACCESS HIGHWAYS

2.26.1 PURPOSE

To provide uniform statewide advance guide sign applications that ensure motorists are provided advance notification of interchange exits on limited access highways.

2.26.2 BACKGROUND

The Department's *International Signing Practices Study* recognized the need of the international tourist for advance notification of exit direction information. The most frequently cited problem of international visitors navigating in Florida was the lack of information about exits. Since this need is not limited to the international tourist, but to every unfamiliar motorist and also older drivers from both in and out-of-state this section was developed. The application for interchange guide signs is currently addressed in [Section 2E.30 of the MUTCD](#).

2.26.3 DEFINITIONS

The following definitions apply to this section and are in accordance with [Section 2E.32 of the MUTCD](#):

Intermediate Interchange. An interchange with urban and rural routes not in the category of major or minor interchanges..

Major Interchange. Subdivided into two categories: (a) interchanges with other expressways or freeways, or (b) interchanges with high-volume multi-lane highways, principal urban arterials, or major rural routes where the volume of interchanging traffic is heavy or includes many road users unfamiliar with the area

Minor Interchange. An interchange where traffic is local and very light, such as interchanges with land service access roads. Where the sum of the exit volumes is estimated to be lower than 100 vehicles per day in the design year.

2.26.4 PROCEDURE

- (1) For urban areas, two advanced guide signs are required for every major and intermediate interchange on the Interstate, Florida's Turnpike System, and other limited access roadways.

- (2) The two advance guide signs should be placed 1/2 mile and 1 mile upstream of the exit. If interchange spacing prohibits the placement of these two advanced guide signs, then the interchange sequential series signs ([Section 2E.40 of the MUTCD](#)) should be used. Left hand exit interchanges should utilize diagrammatic signs.
- (3) For major and intermediate interchanges, the two advance guide signs must be mounted overhead in urban areas. For rural interchanges either cantilever or ground mounted signs are adequate.
- (4) For major interchanges in the rural area and freeway-to-freeway interchanges, three (3) advance guide signs must be provided and located approximately 1/2 mile, 1 mile, and 2 miles upstream from the exit. For rural intermediate interchanges, two advance guide signs are to be installed.
- (5) Implementation of this advance guide sign program should be through construction projects scheduled in the work program. The [District Traffic Operations Engineer](#) must develop a list of interchanges for inclusion into the work program projects. Stand-alone advance guide sign projects are not required to comply with this standard.

Section 2.27

COMMUTER ASSISTANCE SIGNS

2.27.1 PURPOSE

To provide statewide sign design consistency for the Department's Commuter Assistance Program, [Topic Number 725-030-008](#).

2.27.2 BACKGROUND

Coordinated use of existing transportation resources can provide a responsive, low cost alternative for alleviating urban highway congestion and improving air quality, thereby reducing the need for costly highway improvements. The Commuter Assistance Program focuses on the single occupant commuter trip which is the greatest cause of peak hour highway congestion. A coordinated effort to provide alternatives to these commuters, using existing or low cost resources, can be beneficial to the development of a transportation demand management program and public transit statewide. The State's Commuter Assistance Program encourages a public/private partnership to provide services to employers and individuals for: carpools, vanpools, express bus service, subscription transit service, group taxi services, heavy and light rail, and other systems which are designed to increase vehicle occupancy.

2.27.3 SIGN DESIGN AND INSTALLATION

- (1) [Section 2I.11 of the MUTCD](#) provides guidance for the installation of a carpool information sign.
- (2) Signing requests received from the Department's Public Transit Office or local transit agencies must be approved by [District Traffic Operations Engineers](#).
- (3) Sign placement will be determined by District Traffic Operations based on field review and space availability.
- (4) The Department's Commuter Assistance Program also includes two additional modes of services (vanpooling and transit) and there are different signs for each of these services.
- (5) There are two different sizes for each sign design. The arterial sign shall be 36 x 24 inches. The interstate sign shall be 78 x 48 inches. All signs shall be blue reflective background with white lettering.

- (6) Exact sign details for the TRY CARPOOLING (***FTP-56-06 and FTP-56A-06***) TRY TRANSIT (***FTP-59-06 and FTP-60-06***) and TRY VANPOOLING (***FTP-57-06 and FTP-58-06***) are available in the **[Department's Design Standards, Index 17355](#)**.
- (7) Electronic sign details for the all the signs in this section are available in the Department's Sign Library at the following website:

http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist_Srvc/Motorist_Service.shtm
- (8) Mounting heights and lateral clearances should adhere to those specified in the **[Department's Design Standards, Index No. 17302](#)** and support systems shall meet or exceed Department standards of frangibility.

Section 2.28

REFERENCE LOCATION SIGNS (MILE-MARKERS)

2.28.1 PURPOSE

To establish consistent criteria and signing methods for reference location signs (mile markers) on both limited and non-limited access roadways.

2.28.2 STANDARDS

- (1) Reference location signs shall be as described in [Section 2H.05 and Section 2H.06 of the Manual of Uniform Traffic Control Devices \(MUTCD\)](#). These signs consist of a vertical panel containing the mile-marker number. The sign shall have 6-inch white letters on a green reflective background and be placed on the right side of the roadway at 1-mile or 1/2-mile increments as detailed in [Sections 2.28.3 and 2.28.4](#).
- (2) The zero distance shall be established at the southern or western state line or at junctions where the route begins. [MUTCD](#) standards shall be followed for overlap routes.

2.28.3 CRITERIA FOR LIMITED ACCESS ROADWAYS

Reference Location Signs and Enhanced Reference Location Signs shall be used on limited access facilities. The following criteria shall be used when selecting reference location signs along limited access facilities:

- (a) Reference location signs ([Section 2H.05 of the MUTCD](#)) shall be used every 1.0 mile outside urban boundary facilities.
- (b) Enhanced reference location signs ([Section 2H.06 of the MUTCD](#)) shall be used every half mile inside urban boundary facilities.

2.28.4 CRITERIA FOR NON-LIMITED ACCESS ROADWAYS

- (1) While reference location signs will be helpful on many roadways, those with existing positioning systems, i.e., good building numbers, adequate landmarks, and signed cross streets will not benefit significantly. In addition, there may be many requests from municipalities to provide these signs on qualifying roadways. The following criteria shall be used when selecting roadways to use reference location signs:
 - (a) Cross at least two municipalities or two county jurisdictions within three miles.
 - (b) Relatively devoid of named landmarks, cross streets, or building addresses that would serve as navigation aids for motorists in the area.

- (c)** Can be identified by local Emergency Medical Services (911) program to assist in address location.
 - (d)** The proposed reference location sign should not interfere in any manner with other traffic control devices.
- (2)** Requests for the reference location signing must be initiated by local jurisdictions. In all cases, requests shall be directed to the District Traffic Operations Engineer and must meet all the criteria listed above.
- (3)** The local jurisdiction must, through the permit process, erect and maintain reference location signs on state system roadways, but the District Traffic Operations Engineer is responsible for the route signing plan.

Section 2.29

USE OF FLUORESCENT YELLOW-GREEN SIGN SHEETING

2.29.1 BACKGROUND

Per [Section 7B.07 of the MUTCD](#) all signs and supplemental plaques used in association with school warning are to have a fluorescent yellow-green background with a black legend. This includes all S-series warning signs and associated plaques.

The other allowable uses for fluorescent yellow-green background are limited to locations where there is a demonstrated need.

2.29.2 CRITERIA

- (1) The following minimum criteria must be met before the [District Traffic Operations Engineer](#) will authorize the use of the fluorescent yellow-green color (FYG).
- (2) If there is a significant aging driver population (65 years and older), that exceeds the statewide average, the criteria below may be considered satisfied.

2.29.2.1 Pedestrian Crossing Signs

Must meet **one** of the following criteria:

- (1) Where pedestrian crossings occur on a designated home to school route and a specific request is made by local government.
- (2) Where there are two or more documented crashes involving pedestrians with injuries and the application of FYG would provide more awareness to drivers.
- (3) Where there are visibility problems for the subject drivers and the more visible sheeting would better alert drivers of the crossing.
- (4) Where a combination of heavy pedestrian presence and high vehicle speeds are documented. Law enforcement citations are evidence of this condition.

2.29.2.2 Bicycle and Shared Use Path (Trail) Crossing Symbol Signs

Must meet **one** of the following criteria:

- (1) Where recreational trails cross the State Highway System and there are sufficient numbers of bicyclists to generate a high potential for crashes.
- (2) Where there are two or more documented crashes between bicycles and motor vehicles with injuries where FYG would make drivers more aware of the crossing.

2.29.3 APPLICATION

- (1) The use of FYG signs is not to be considered a retrofit program. Rather they are to be used where the higher visibility color will improve safety (exceeding the use of the standard color), as noted in the above conditions.
- (2) The signs shall be mounted the same as standard yellow warning signs and according to height and lateral clearances specified in the [Department's Design Standards, Index No. 17302](#).

Section 2.30

SIGNING FOR ONE-STOP CAREER CENTERS

2.30.1 PURPOSE

The intent of this sign is to assist Floridians locate full-service One-Stop Career Centers located statewide. These centers provide a customer service network that offer every Floridian access to re-employment information, job search consulting, training and education referrals, and temporary financial assistance.

2.30.2 BACKGROUND

In 1995, the State of Florida began taking steps toward a new future for workforce development. Florida has committed significant resources to the development and integration of its workforce development system, perhaps most significant is the development of the One-Stop Career Centers. These centers offer universal services to all Floridians, not just those eligible for specific programs.

2.30.3 DEFINITIONS

Full-Service One-Stop Career Center. A physical location designated by the Regional Workforce Development Board which provides access to legislatively mandated partner agencies, and on-site delivery of core services, i.e., job search, placement assistance, skills assessment, and information on supportive services.

2.30.4 SIGN DESIGN AND INSTALLATION

- (1) The One-Stop Career Center sign (**FTP-36-06**) shall be 36 x 36 inches and is white on green in color. The exact detail is shown in the [Department's Design Standards, Index 17355](#).
- (2) An electronic sign detail can be found at the Department's Sign Library at the following website:

http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist_Srvcs/Motorist_Service.shtm
- (3) Sign requests must be submitted by a local representative of the [Workforce Regional Development Boards](#) to the appropriate [District Traffic Operations Engineer](#). The Department will only sign for full-service One-Stop Career Centers as defined above.

- (4) One-Stop Career Center signs will only be installed and maintained by the Department on Non-Limited Access Highways.
- (5) Signs will be placed, based on availability of suitable space, at the nearest intersection along the State Highway System to the One-Stop Career Center.
- (6) Mounting heights and lateral clearances shall adhere to those specified in the [*Department's Design Standards, Index No. 17302*](#) and support systems shall meet or exceed Department standards for frangibility.

Section 2.31

UNIQUE TRANSPORTATION SYMBOL SIGNS

2.31.1 PURPOSE

To provide standards for the use of FHWA approved transportation symbol signs on the State Highway System.

2.31.2 BACKGROUND

- (1) Florida has a unique traveler composition compared to other states, in that a significant proportion of motorists are not familiar with our roadways. This is mainly due to the very large number of tourists, both domestic and international.
- (2) We have found through research in our International Signing Study that non-familiar motorists respond very well to symbol signs.
- (3) We have enhanced our signing program by implementing the following innovative symbol signs that describe transportation related services or destinations.

2.31.3 SCOPE

The use of the symbol signs in this section must meet the criteria for motorist services signing established in [Rule Chapter 14-51, F.A.C., Florida's Highway Guide Sign Program](#). More specifically, [Rule 14-51.021\(1\)\(f\), F.A.C.](#) for Limited Access Highways and [Rule 14-51.031\(1\)\(f\), F.A.C.](#) for Non-Limited Access Highways.

2.31.4 PASSENGER SHIP SIGN

- (1) The passenger ship transportation mode forms an important destination for both Florida residents and visitors to the state. This symbol sign will be used throughout the state to trailblaze the routes to passenger seaports and cruise ship ports that meet criteria specified in **Section 2.31.3**.
- (2) The PASSENGER SHIP sign (**Figure 2.31-1**) is a white symbol on green background.
- (3) A 30-inch sign panel should be used on limited access highways and a 24-inch panel on non-limited access highways.

- (4) Electronic sign details are available in the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Guide/Guide.shtm>

Figure 2.31-1. Passenger Ship Sign



2.31.5 AMTRAK SIGN

- (1) This AMTRAK symbol sign is currently approved for use on guide signs and trailblazing to Amtrak stations.
- (2) Approval to place the AMTRAK sign shall be in accordance with criteria specified in **Section 2.31.3**.
- (3) The AMTRAK sign (**Figure 2.31-2**) is a white symbol on green background.
- (4) A 30-inch sign panel should be used on limited access highways and a 24-inch panel on non-limited access highways.
- (5) Electronic sign details are available in the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Guide/Guide.shtm>

Figure 2.31-2. Amtrak Sign




2.31.6 GREYHOUND SIGNING

- (1) This 3-color sign will be used as a motorist service sign and also to trailblaze to intra-city bus stations. Currently, there is no good way to sign for small bus stations that may be located within a building used for other businesses. The use of this symbol sign will make it easier to trailblaze to these locations.
- (2) Approval to place the GREYHOUND sign shall be in accordance with criteria specified in **Section 2.31.3**.
- (3) The GREYHOUND sign is (**Figure 2.31-3**) a 3-color symbol with a white border on a green background
- (4) A 30-inch panel should be used on limited access highways and a 24-inch panel on non-limited access highways.
- (5) Electronic sign details are available in the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Guide/Guide.shtm>

Figure 2.31-3. Greyhound Sign

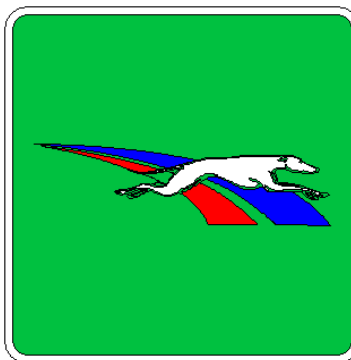

2.31.7 INSTALLATION AND PLACEMENT

- (1) Where these signs are approved for use as trailblazer signs they shall be installed in accordance with height and lateral clearance requirements shown in the [Department's Design Standards, Index 17302](#).
- (2) Where these signs are approved for use as general service signs appended to freeway guide signs, they must conform to the [Department's Design Standards, Index 17350](#) except for color scheme.

Section 2.32

511 TELEPHONE SERVICE SIGN

2.32.1 PURPOSE

The 511 Telephone Service is part of a nationwide program where motorists who wish to obtain traffic and transportation information can do so by dialing 511 from either their cell or regular phones in areas where the service is available. Signs will be erected to inform motorists of the phone number for this service.

The signing will extend to all Interstate and major State Highway System roadways throughout the state that have the 511 Telephone Service.

2.32.2 SIGN DESIGN AND PLACEMENT

- (1) The CALL 511 sign (*Figure 2.32-1*), as found in [Section 2I.10 of the MUTCD](#), has two standard sizes. Signs installed on limited access highways shall be 48 x 60 inches (*FTP-66-06*) while signs installed on non-limited access highways shall be 36 x 48 inches (*FTP-67-06*).

Figure 2.32-1. TRAVEL INFO CALL 511 Sign



- (2) The CALL 511 signs (*FTP-66-06 and FTP 67-06*) shall have a white legend on blue background and the exact sign details are shown in the [Department's Design Standards, Index No. 17355](#).

- (3) Electronic sign details can be found in the Department's Sign Library at the following website:

http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Motorist_Srv/Motorist_Service.shtm

- (4) When the 511 Telephone Service becomes available, specific sign placement details shall be reviewed by the appropriate [District Traffic Operations Offices](#) using the guidelines shown in **Sections 2.32.2.1 and 2.32.2.2.**

2.32.2.1 Interstate and Other Limited Access Routes

- (1) At state and county lines
- (2) At approximately 10 mile intervals in urban/metro areas
- (3) At approximately 30 mile intervals in rural areas
- (4) Preceding major freeway to freeway interchanges

2.32.2.2 Major Arterial Routes

- (1) At state and county lines
- (2) At approximately 10 mile intervals in urban/metro areas
- (3) At approximately 30 mile intervals in rural areas
- (4) Recommended locations should be upstream from intersections formed by junctions of U.S./Major State Highway System Roadways at the discretion of the District Traffic Operations Engineer.

Section 2.33

SIGNING FOR NATURE-BASED TOURISM AND HERITAGE TOURISM TRAILS

2.33.1 PURPOSE

The purpose of this section is to identify for prospective sponsors of nature-based and/or heritage trails the type of support the Department can offer and the signs that are appropriate for installing along public roadways.

2.33.2 BACKGROUND

- (1) The concept of nature-based and heritage tourism is best explained as a statewide effort to promote the natural and historic resources of our state. These resources include natural spaces of our State Parks, lakes, rivers, beaches, and woodlands, as well as the rich historical and cultural sites across Florida.
- (2) The Department is an active participant in the effort to promote Florida's natural assets through nature-based tourism and heritage tourism programs. The Department's role is to provide a mechanism for using public right of way for the needed signs and provide engineering guidance to ensure that effective signing plans are developed.
- (3) Some examples of approved trails are the Historic Heritage Trail sponsored by the Department of State, the Birding Trail sponsored by the Fish and Wildlife Conservation Commission, and the Gulf Coast Heritage Trail sponsored by the Sarasota Bay National Estuary Program.

2.33.3 PILOT PROGRAM

- (1) The Gulf Coast Heritage Trail was the first regional nature-based tourism trail program within the state and the Department approved the signing plan as a pilot program. It is a true trail system in that trail-blaze signs identify the route to follow to access the sites, which are also described in the auto tour map and brochure. The program was pioneered and coordinated by the Sarasota Bay National Estuary Program in Sarasota and Manatee Counties.
- (2) The success of this pilot is such that the Department is using the Gulf Coast Heritage Trail as a model for other regional plans to follow.

2.33.4 CRITERIA FOR SIGNING PROGRAM

In developing a trail system, several criteria must be followed by the sponsor of the proposed nature-based or heritage tourism trail.

- (1) The sponsor must develop grassroots support including local input into establishing routes.
- (2) The program must include use of a land-based brochure with auto tour map - the signs are not the primary guidance method.
- (3) Attraction selection should be restricted to public ownership, non-profit, or for those charging admission, a primary educational purpose (this includes museums and art galleries).
- (4) Promotional posters and an Internet web site are strongly suggested.

2.33.5 DOT PARTICIPATION

- (1) The Department will participate in the development of nature-based and heritage tourism programs by providing advisory services as the programs are proposed, offer preliminary route recommendations, and approve routes upon which signs may be erected.
- (2) The Department's State Traffic Engineering and Operations Office (850-410-5600) must be contacted early in the process to assure proper coordination with all districts affected by the proposed trail.
- (3) Upon selection of the final route, District Traffic Operations personnel will determine appropriate locations for trail-blaze signs and mark the locations so that a sign contractor can erect the signs. It is the sponsor's responsibility to have the signs manufactured and erected through the Department's general use permitting process. Department staff can provide the names of sign manufacturers and contractors who are experienced in providing these services.

2.33.6 SIGN APPROVAL AND DESIGN

- (1) The State Traffic Operations Engineer in Tallahassee must approve the sign design to be used for this program.
- (2) Logo signs are encouraged for this program, and several criteria apply:
 - (a) Signs installed on non-limited access highways shall be 24-inch panels. The name of the trail should be in white highway sign type, upper case lettering (Helvetica). A sample logo is shown in **Figure 2.33-1**.

- (b) Signs shall be devoid of advertising.
- (c) Signs logos may use colors, but must contain a brown background of Type III retro-reflective sheeting, per [Section 994 of the Department's Standard Specifications](#). Inks must be transparent highway sign types.
- (d) Signs should be installed along the State Highway System route with an arrow pointing in the appropriate direction where cross streets must be used to access the attraction. Confirmation signs, with straight-ahead arrows, are used at appropriate intervals to let motorists know they are on the right path (usually 3-5 miles depending upon length of the route segments).

Figure 2.33-1. Logo for Gulf Heritage Trail



2.33.7 SIGN MAINTENANCE

- (1) The sponsors of the proposed nature-based and/or heritage trails are responsible for the maintenance of the signs used throughout the trail.
- (2) A contract with a private sign installation contractor should be executed or a maintenance agreement with local government secured for signs on the State Highway System.
- (3) Evidence of the contract or agreement must be presented to the appropriate [District Traffic Operations](#) office prior to installation of the signing program.

Section 2.34

SIGNING FOR THE FLORIDA SCENIC HIGHWAYS PROGRAM AND THE NATIONAL SCENIC BYWAYS PROGRAM

2.34.1 PURPOSE

To establish statewide signing standards for designated Florida Scenic Highways and/or National Scenic Byways.

2.34.2 BACKGROUND

- (1) The intent of both the Florida Scenic Highways Program (FSHP) and the National Scenic Byways Program (NSBP) is to designate paved public roads as scenic corridors to preserve, enhance, and maintain the intrinsic resources for the enjoyment of the traveling public.
- (2) For a roadway to be designated under either or both these programs, the roadway must possess at least one of the following six intrinsic resources:
 - (a) **Cultural Resources.** Include the traditions, values, customs and arts of social groups.
 - (b) **Historical Resources.** Reflect human actions evident in past events, sites or structures.
 - (c) **Archaeological Resources.** Embody the physical evidence or remains of human life, activities, or cultures.
 - (d) **Recreational Resources.** Highlight activities dependent upon the natural elements of the landscape.
 - (e) **Natural Resources.** The natural landscapes showing little or no disruption by humans.
 - (f) **Scenic Resources.** Combinations of natural and manmade features that give the visual landscape remarkable character and significance.
- (3) Benefits of designation as a Florida Scenic Highway and/or a National Scenic Byway include:

- (a) **Resource Protection.** FSHP/NSBP designation provides the opportunity to preserve and enhance the significant intrinsic resources along public roads.
- (b) **Community Recognition.** The posting of the FSHP/NSBP logo signage along the designated highways will identify the corridors as “special places” with important resources worth noting.
- (c) **Economic Development/Tourism.** Designation provides an opportunity for the millions of tourists traveling by car in Florida to visit these communities along a designated highway corridor.
- (d) **Community Visioning.** The FSHP/NSBP designation can complement and support a community’s vision thereby instilling a sense of pride.
- (e) **Partnering.** This concept comes from public and private cooperation of agencies and corporate sponsorships, which provide support to the community and the overall corridor’s focus.

2.34.3 PROGRAM COORDINATION

- (1) FDOT’s [Environmental Management Office \(EMO\)](#) oversees the Statewide Florida Scenic Highways Program.
- (2) Each FDOT District Office has a designated District Scenic Highways Coordinator that represents the district in all matters pertaining to the FSHP or NSBP. The District Scenic Highways Coordinators are the initial point of contact for questions about the Program and provide the link between the Department and the community.

2.34.4 SIGN CRITERIA

- (1) In signing a designated Florida Scenic Highway (FSH) or National Scenic Byway (NSB), the following criteria must be followed:
 - (a) Signing shall not interfere with or distract from adjacent traffic control devices or from the resources of the area.
 - (b) Signing shall conform to the [MUTCD](#), which is incorporated by reference in [Rule 14-15.010, F.A.C.](#)
 - (c) Highways that lose designation under the FSHP or the NSBP shall have all FSH and NSB signs removed.

- (2) Designated FSH, and NSB (as applicable), shall be signed at entrance points to a route. Signing along a designated highway will be installed approximately every five-miles in both directions. However, during the review by District Traffic Operations, exceptions can be made based on frequency of intersections and/or directional needs.
- (3) Signs shall be installed for both FHS and NSB in accordance with the approved sign standards shown in Sections 2.34.5 **and** 2.34.6.

2.34.5 FLORIDA SCENIC HIGHWAY SIGNS

2.34.5.1 COORDINATION

- (1) The Department of Transportation provides advisory services when highway corridors are proposed for eligibility or designation to the FSHP. Once the highway corridor is designated, the District Scenic Highway Coordinator(s) facilitates the coordination of the sign implementation process.
- (2) The proper sign coordination process for a FSH is detailed below:
 - (a) The District Coordinator(s) will coordinate the preferred location(s) for the FSHP signs with the District Traffic Operations Office, along with the Corridor Management Entity (CME).
 - (b) The District Traffic Operations Office will finalize the location(s) of the signs and send a work request to the appropriate District Maintenance Yard for installation.
 - (c) One additional sign will be ordered along with all the other signs. This sign is to be used as a display at the ceremony and is not to be placed along the corridor.
 - (d) The CME and its partners may host a dedication ceremony to celebrate the designation of the particular corridor as a Florida Scenic Highway.

2.34.5.2 SIGN DETAIL

- (1) The standard sign design to be used to designate a Florida Scenic Highway is shown in Figure 2.34-1. There are two sign sizes available, and they are to be used in the specific applications shown in **Section 2.34.5.3**.
- (2) Exact sign details are shown in the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Misc/Misc.shtm>

2.34.5.3 SIGN INSTALLATION

- (1) The 24 x 36 FSH sign (Figure 2.34-1) shall be installed at the entrance points to a designated Florida Scenic Highway route along with a supplemental panel with the scenic highway's name.

Figure 2.34-1. Florida Scenic Highway Sign Design



- (2) When appropriate, the Florida Scenic Highway Sign shall be co-located with existing route confirmation signs. The 16 x 24 sign panel should be installed on top of this sign. The exact application is shown in **Figure 2.34-2**.

Figure 2.34-2. Co-Location on Route Confirmation Marker



- (3) When the designated scenic highway intersects with another state road, the 16 x 24 sign panel should be installed on existing route directional signs. The exact application is shown in Figure 2.34-3.
- (4) The Department is responsible for the installation of the FSH signs on the State Highway System.

- (5) The local government is responsible for the installation of the FSH signs on their system.

2.34.5.4 MAINTENANCE

- (1) The maintenance of the FSH signs used throughout the scenic highway corridor depends on the government entity that is responsible for the roadway.
 - (a) The Department is responsible for the maintenance of FSH signs on the State Highway System.
 - (b) Local government is responsible for the maintenance of FSH signs on their roads.

Figure 2.34-3. Co-Location on Route Direction Marker



2.34.6 NATIONAL SCENIC BYWAY SIGNS

2.34.6.1 COORDINATION

- (1) The Department provides advisory services when highway corridors are proposed for eligibility or designation to the NSBP. Once the highway corridor is designated, the District Scenic Highway Coordinator(s) facilitates the coordination of the sign implementation process similar to the FSH process

outlined in Section 2.34.5.1. The only difference will be no need for an extra NSB sign panel for the dedication ceremony.

- (2) The District Scenic Highways Coordinator(s) will work with the Statewide Scenic Highways Coordinator to submit applications for National Scenic Byway or All-American Road designation to the Federal Highway Administration.
- (3) Once designated as National Scenic Byway or All-American Road, the District Scenic Highway Coordinator(s) will facilitate the following process.
 - (a) The District Scenic Highway Coordinator(s) will coordinate the location of the NSBP signs with the District Traffic Operations Office.
 - (b) District Traffic Operations will locate the signs and send a work request to the appropriate District Maintenance Yard for installation.
 - (c) The District Scenic Highway Coordinator(s) will contact the respective District Maintenance Office or local government to coordinate the installation of the signs along the corridor.

2.34.6.2 SIGN DETAIL

- (1) The FHWA developed and approved the *America's Byways (D6-4 and D6-4a)* sign shown in [Section 2D.55 of the MUTCD](#). This sign is approved for use on National Scenic Byways.
- (2) The exact sign details for the National Scenic Byways Sign can be found in the *FHWA's Standard Highway Signs Manual*.

2.34.6.3 INSTALLATION

- (1) The NSB sign shall be installed at the entrance points to a designated byway. When possible, this sign shall be mounted below the FSH sign on a standard sign pole.
- (2) When an existing designated Florida Scenic Highway becomes a National Scenic Byway, District Traffic Operations will review the existing signing on the designated roadway for possible ways to accommodate both designations on the corridor. If unable, to place both, then the FSH will have the priority on the roadway.
- (3) The Department is responsible for the installation of the NSB signs on the State Highway System.

- (4) The local government is responsible for the installation of the NSB signs on their system.

2.34.6.4 MAINTENANCE

- (1) The maintenance of the NSB signs used throughout the National Scenic Byway corridor depends on the government entity that is responsible for the roadway.
 - (a) The Department is responsible for the maintenance of the NSB sign on the State Highway System.
 - (b) Local government is responsible for the maintenance of the NSB sign on their roads.

Section 2.35

SIGNING FOR MEMORIAL ROADWAY DESIGNATIONS

2.35.1 PURPOSE

The purpose of this section is to provide guidance to the districts on the installation of signs when a roadway has been given a memorial designation by the Florida Legislature.

2.35.2 BACKGROUND

- (1) Over the years, the Florida Legislature has dedicated, named, and otherwise titled roadways in Florida. The designated roads can be under the jurisdiction of either the Department or local government.
- (2) Records kept in the Department's Transportation Statistics Office identify the earliest dedicated roadway as the W.W. Clark Memorial Bridge on State Road 580 between Safety Harbor and Oldsmar. This was dedicated by the State Road Board on July 6, 1922. Since that time, every county and most cities have participated in officially naming some roadway feature.

2.35.3 SIGNING PROCESS

- (1) The Florida Legislature designates the roadways based on recommendations from a city or county commission, individual state agencies, or civic groups.
- (2) Upon official designation by the Florida Legislature, it is the responsibility of the legislative sponsors of the designation to obtain local resolutions in accordance with [Section 334.071\(3\), F.S.](#)
- (3) After receiving a copy of the local resolution, the Department shall begin the process to have the signs installed on the State Highway System.
- (4) Within the Department, the process for the installation of these signs involves the following offices:
 - (a) District Public Information Office
 - (b) District Traffic Operations Office
 - (c) District Maintenance Office
 - (d) State Traffic Engineering and Operations Office
 - (e) Transportation Statistics Office

- (5) Each district has their own signing process in place, and it varies as to which of the above district offices initiates the process. However, it is important that all the above district offices are notified and kept informed as to the status of roadway designations within their district after each legislative session.
- (6) Each district will coordinate the installation of the signs with the legislative sponsor of the designation.
- (7) Memorial names may not appear on guide signs or on any other than the standard sign, in accordance with [Section 2M.10 of the MUTCD](#)


2.35.4 SIGN INSTALLATION AND MAINTENANCE

- (1) Signs shall be installed and maintained by the Department on the State Highway System.
- (2) On non-limited access facilities, one sign per direction shall be installed in accordance with [Section 2M.10 of the MUTCD](#).
- (3) On limited access facilities, one sign per direction shall be installed in accordance with [Section 2M.10 of the MUTCD](#).

2.35.5 SIGN DESIGN

- (1) The signs used for Memorial Roadway Designations shall be a brown panel with yellow lettering. An example of this sign is shown in **Figure 2.35-1**.

Figure 2.35-1. Memorial Roadway Designation Sign

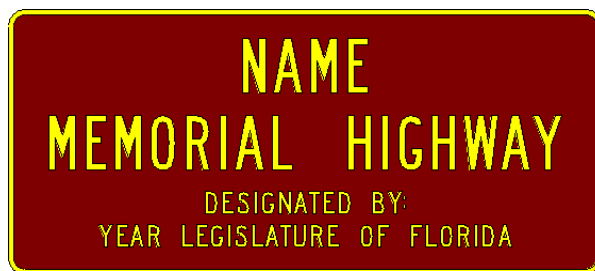

- (2) The exact sign detail for this sign can be found at the Department's Sign Library at the following website:

<http://www.dot.state.fl.us/TrafficOperations/Operations/SignLibrary/Misc/Misc.shtm>

Section 2.36

COMMUNITY WAYFINDING GUIDE SIGNS

2.36.1 PURPOSE

The purpose of this section is to provide guidance to the districts on the process for approving Community Wayfinding Guide Signs on the State Highway System.

2.36.2 BACKGROUND

- (1) The Department, in cooperation with the Florida League of Cities, has developed statewide criteria for Community Wayfinding Guide Signs on our State Highway System. These standards as shown in [Rule 14-51, Part V, F.A.C.](#), (Florida's Highway Guide Sign Program) provide local governments the flexibility to design their own Community Wayfinding Guide Sign System while still maintaining federal and state sign standards to safely guide motorists to their destinations.
- (2) The standards shown in [Rule 14-51, Part V, F.A.C.](#) allow local governments to have a better understanding of what can and cannot be approved for use on the State Highway System based on the requirements of the MUTCD.

2.36.3 STANDARDS

- (1) All Community Wayfinding Guide Signs on the State Highway System must be in conformance with [Rule 14-51, Part V, F.A.C.](#) prior to any installation.
- (2) In conformance with [Rule 14.51.051\(8\), F.A.C.](#), the design, installation, and maintenance of Community Wayfinding Guide Signs on the State Highway System are the responsibility of local government.

2.36.4 REVIEW PROCESS

- (1) A pre-planning meeting between District Traffic Operations and local government is recommended to assist in compliance with [Rule 14-51, Part V, F.A.C.](#)
- (2) After a Community Wayfinding Guide Sign System Plan has been developed, local governments or their representative must provide one set of the Community Wayfinding Guide Sign System Plans to the appropriate [District Traffic Operations Office](#).
- (3) Once received, the Community Wayfinding Guide Sign System Plan shall be

reviewed by the District Traffic Operations Office for compliance with [Rule 14-51, F.A.C.](#)

- (4) If compliance is not met, District Traffic Operations staff will contact local government with the changes that need to be made to their Community Wayfinding Guide Sign System Plan in order to meet the criteria shown in the [Rule 14-51, F.A.C.](#)
- (5) Once the Community Wayfinding Guide Sign System Plan is approved, the District Traffic Operations Office shall issue a letter of compliance signed by the District Traffic Operations Engineer to the local government.

Section 2.37

ADVANCE STREET NAME SIGNS

2.37.1 PURPOSE

To provide guidance on the design, placement, and installation criteria for the different types of applications of advance street name signs on the State Highway System.

2.37.2 BACKGROUND

This section replaces Section 6.3, Intersection Guide Signs in the Traffic Engineering Manual.

The use of advance street name signs is one of the recommended roadway improvements in the Department's Safe Mobility for Life Program. It was one of the roadway improvements that were implemented back in 1991 through routine maintenance activities. This recommended improvement is based on the [FHWA's Highway Design Handbook for Older Drivers and Pedestrians](#). The use of advance street name signs provides advance notification to drivers in order to assist them in making safer roadway decisions.

In 2002, FDOT conducted an effectiveness study on the older driver roadway improvements that were implemented, including advance street name signs. Data from that study showed that advance street name signs with larger lettering were read at a greater distance from the intersection being announced which led to significantly more decision time.

2.37.3 DEFINITIONS

Critical or Significant Cross Street. A signalized or unsignalized intersection or cross street classified as a minor arterial or higher, that provides access to a traffic generator or possesses other comparable physical or traffic characteristics deemed to be critical or significant and having an AADT greater than 2000.

2.37.4 STANDARDS

The standards shown in this section apply to each of the three different types of advance street name sign applications. Specific criteria for the installation of advance street name signs at signalized intersections (NEXT SIGNAL) is shown in **Section 2.37.5**, for non-signalized intersections (NEXT INTERSECTION) in **Section 2.37.6** and for advance street name plaques on intersection warning signs in **Section 2.37.7**.

- (1) Advance street name signs and Advance Street Name plaques shall only be used to identify critical or significant cross streets. They are not intended to identify destinations such as cities, facilities, or residential neighborhoods.
- (2) Whenever possible the word Street, Boulevard, Avenue, etc., should be abbreviated or letter height reduced to conserve sign panel length. In special cases it may be deleted; however, if confusion would result due to similar street names in the area, for example Orange Street and Orange Avenue, this deletion should not be made.
- (3) When a cross street is known by both route number and a local name, use of the local name is preferred on the advance street name sign since the route number is identified on route markers along the route.
- (4) When minor cross streets intersect the state highway between the advance street name and the intersection, additional legend such as NEXT SIGNAL or XX FEET may be added to the advance street name sign.
- (5) The legend used on the advance street name sign or plaque shall be consistent with the legend on either the overhead street name or post mounted street name sign.
- (6) Sign sheeting materials shall comply with the current edition of the [Section 994 of the Department's Standard Specifications](#).
- (7) Mounting heights and lateral clearances should adhere to those specified in the [Department's Design Standards, Index No. 17302](#) and support systems shall meet or exceed Department standards of frangibility.
- (8) Signs should be installed in advance of the intersection in accordance with the distances shown in ["Condition A" of Table 2C-4 of the MUTCD](#). These distances are to be considered the minimum for a single lane change maneuver and should be measured from the begin taper point for the longest auxiliary lane designed for the intersection. The degree of traffic congestion and the potential number of lane change maneuvers that may be required should also be considered when determining the advance placement distance.

2.37.5 ADVANCE STREET NAME SIGNS AT SIGNALIZED INTERSECTIONS

- (1) Requests to install advance street name signs (**Figure 2.37-2**) must be initiated by District Traffic Operations or based on a request received from the local agency having jurisdiction over the approaching cross street. The District Traffic Operations Engineer is responsible for the review and approval of these signs.

- (2) Advance street name signs shall be white lettering on green background and designed in accordance with [Section 2D.44 of the MUTCD](#).

Figure 2.37-1. Advance Street Name Sign at Signalized Locations



- (3) At a minimum, letter height (legend) shall conform to [Table 2.37-3, Design Guidelines for Advance Street Name Signs](#).

Table 2.37-2 Design Guidelines for Advance Street Name Signs			
Posted Speed Limit (mph)	Letter Size (inches) Series E Modified		Letter Size (inches) Series E
	Upper	Lower	NEXT SIGNAL or NEXT INTERSECTION
35 or less	8	6	8
40 or greater	10.67	8	8

- (4) When a cross street has a different name on each side of the intersection, both names shall be shown on the advance sign with an arrow beside each name to designate direction ([Figure 2.37-3](#)).

Figure 2.37-3. Advance Street Name Sign Using Different Names



- (5) Advance street name signs at signalized intersections should be installed when:
- (a) There is a documented history of side-swipe or rear-end crashes or;
 - (b) There are high volume approaches.

2.37.6 ADVANCE STREET NAME SIGNS AT NON-SIGNALIZED INTERSECTIONS

- (1) Requests to install advance street name signs (**Figure 2.37-4**) at non-signalized intersections must be initiated by District Traffic Operations or based on a request received from the local agency having jurisdiction over the approaching cross street. The District Traffic Operations Engineer is responsible for the review and approval of these signs.
- (2) These signs may be installed on multi-lane divided highways that have a dedicated left turn lane, not just a median opening for the approaching critical or significant cross street. The posted speed of the roadway shall not be lower than 45 mph.
- (3) Advance street name signs shall be designed in accordance with [Section 2D.44 of the MUTCD](#) and the **Standard Highway Signs and Markings Book**.
- (4) At a minimum, letter height (legend) shall conform to **Table 2.37-2, Design Guidelines for Advance Street Name Signs**.

Figure 2.37-4. Advance Street Name Signs at Non-Signalized Locations



2.37.7 ADVANCE STREET NAME PLAQUES ON INTERSECTION WARNING AND ADVANCE TRAFFIC CONTROL SIGNS

- (1) Intersection Warning Signs (**W2 series**) (**Figure 2.37-5**) and Advance Traffic Control Signs (**W3 series**) (**Figure 2.37-6**) should be installed when there is a documented need based on sight restriction, crash history, or engineering judgment. Advance street name plaques as shown in [Section 2C.58 of the MUTCD](#) should be installed on these warning signs when the following criteria are met:

- (a) Minimum 2000 AADT
 - (b) No street lighting along main arterial
 - (c) Documented history of turning, entering, or side-swipe crashes
- (2) It is recommended that wherever a new or replacement Intersection Warning Sign (**W2 series**) is installed on a rural roadway it is accompanied by an advance street name plaque designed in accordance with this section.
- (3) Requests must be initiated by District Traffic Operations or may also be received from the local agency having jurisdiction over the approaching cross street.
- (4) Advance street name plaques shall be black lettering on yellow background using an 8-inch D series lettering size mounted below a 48-inch warning sign panel, in accordance with the [*FHWA's Design Handbook for Older Drivers and Pedestrians*](#). If not structurally possible, lettering size may be decreased to a minimum of 5-inch D series.
- (5) Roads not currently signed with an advance route marker may be considered for an Intersection Warning Sign (**W2 series**) with an advance street name plaque when they meet the criteria referenced in **Section 2.37.7(1)**.

Figure 2.37-5. Advance Street Name Plaque on Intersection Warning Sign



**Figure 2.37-6. Advance Street Name Plaque on
Advance Traffic Control Warning Sign**



Section 2.38

USE OF TEMPORARY STOP SIGNS AT NON-FUNCTIONING SIGNALIZED INTERSECTIONS

2.38.1 PURPOSE

The purpose of this section is to ensure motorist safety after a land falling hurricane. The Department's guiding principles on deploying temporary stop signs shall conform to [Section 316.1235, F.S.](#) and to the [MUTCD](#). This is intended only as a supplement to [Section 316.1235, F.S.](#) While this document is intended for the State Highway System, it can be used for local roadway systems as well.

2.38.2 CONDITIONS FOR USE

- (1) The District Traffic Operations Engineer shall request the erection of temporary stop signs after an emergency event at locations where a signalized intersection is not functioning. A non-functioning signalized intersection is defined as an intersection that is equipped with traffic signals which are damaged and/or without power after an emergency event. When a signalized intersection is not functioning, then temporary stop signs should be installed when one of the following conditions is met:
 - (a) When the signalized intersection's traffic signals are both damaged and/or without power.
 - (b) When the signalized intersection is without power and restoration of power using a generator is not possible.
- (2) When temporary stop signs are utilized at a signalized intersection that is not functioning due to a power outage, the power shall be disconnected to avoid conflicts when power is restored.

2.38.3 LOCATION AND PLACEMENT

- (1) The locations for installation of temporary stop signs shall meet the conditions of use in [Section 2.38.2](#) and shall be at the discretion of the [District Traffic Operations Engineer](#). The District Traffic Operations Engineer shall identify a list of critical signalized intersections to establish a priority for temporary stop sign installation.

- (2) The placement of the temporary stop signs shall be in accordance with **Figures 2.38-1 through 2.38-6** of this section. Placement of the temporary stop signs for any intersection design not represented in **Figures 2.38-1 through 2.38-6** shall be done in accordance with the direction of the District Traffic Operations Engineer, the [Department's Design Standards](#), and the [MUTCD](#).

2.38.4 STORAGE AND DISTRIBUTION

- (1) Each District shall store enough temporary stop signs to be deployed at 7.5 percent of the signalized intersections on the State Highway System in the District.
- (2) The temporary stop signs shall be distributed by the District to the District emergency response teams or emergency contractors on an as-needed basis. It shall be the responsibility of the District to develop a means of distribution to the District emergency response teams or the emergency contractors who will install them as indicated in **Section 2.38.3**.

2.38.5 REMOVAL AND RECOVERY

- (1) The temporary stop signs shall be removed at the same time the signals are placed into operation. The recovery of the temporary stop signs shall be accomplished using District emergency response teams or emergency contractors by either of the following:
 - (a) Complete removal from each intersection.
 - (b) Stockpiling the temporary stop signs in one corner of the intersection for removal later.
- (2) The Districts shall determine the method of recovery and develop a recovery plan for their intersections.

Figure 2.38-1
Temporary Signing for Power Outage – Major Dual Left Intersection

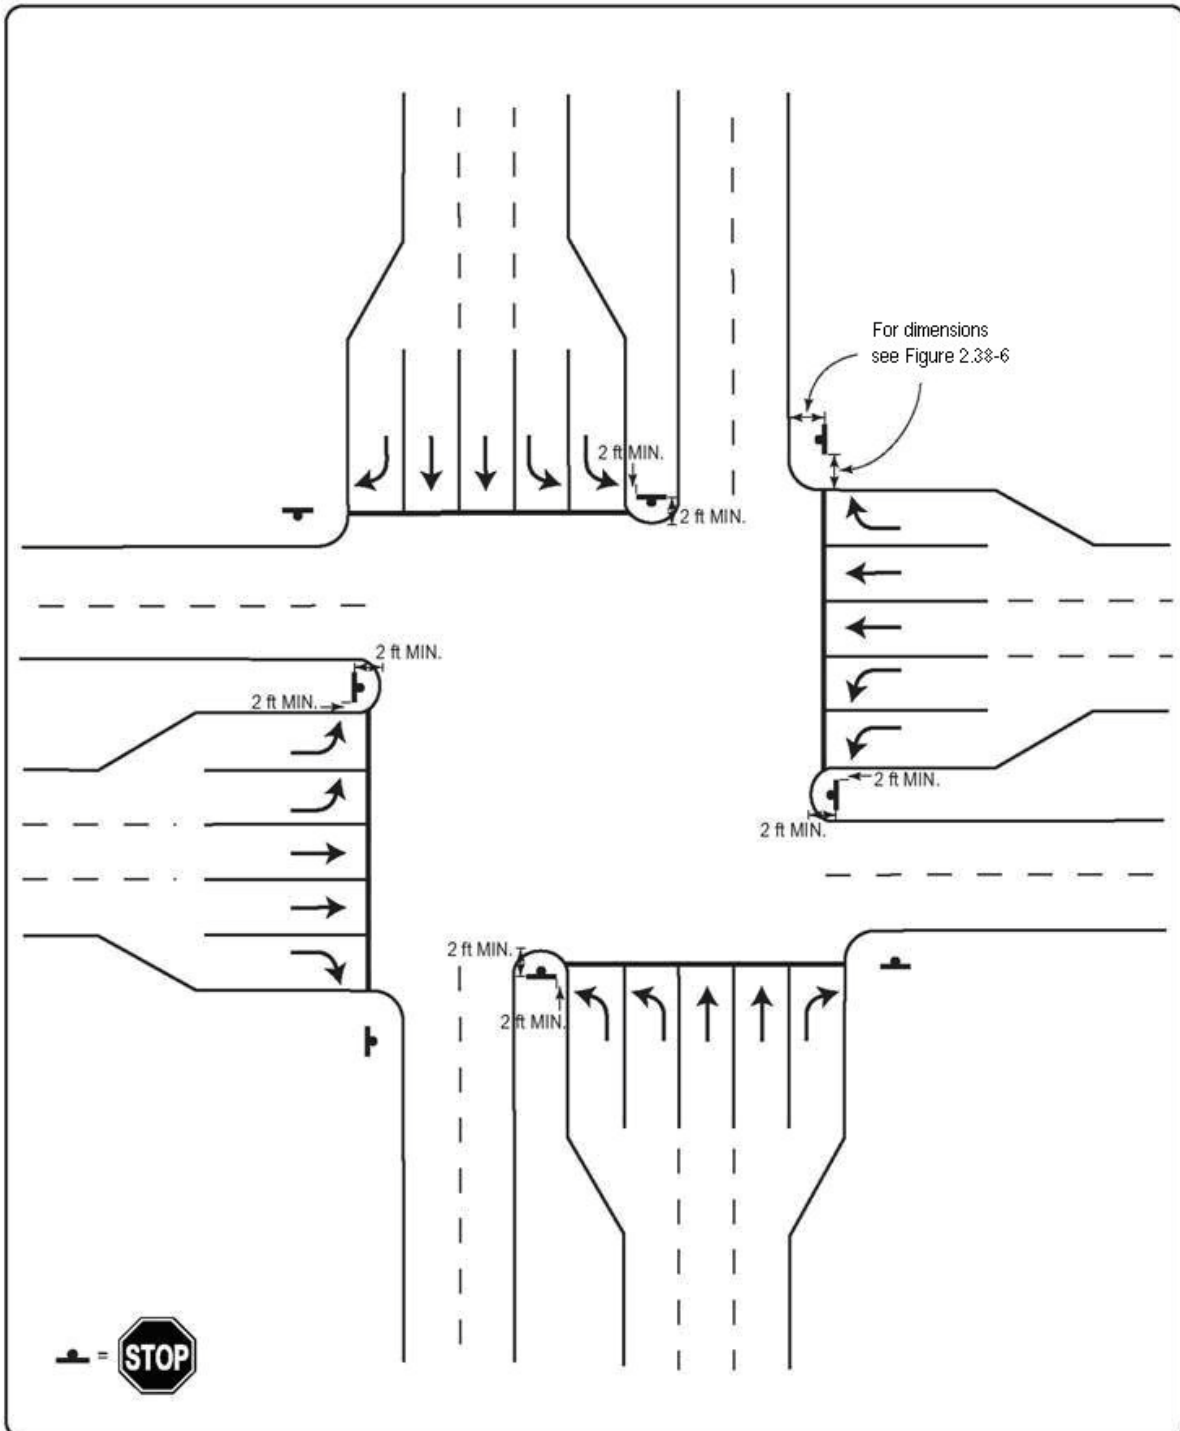


Figure 2.38-2
Temporary Signing for Power Outage – Major Single Left Intersection

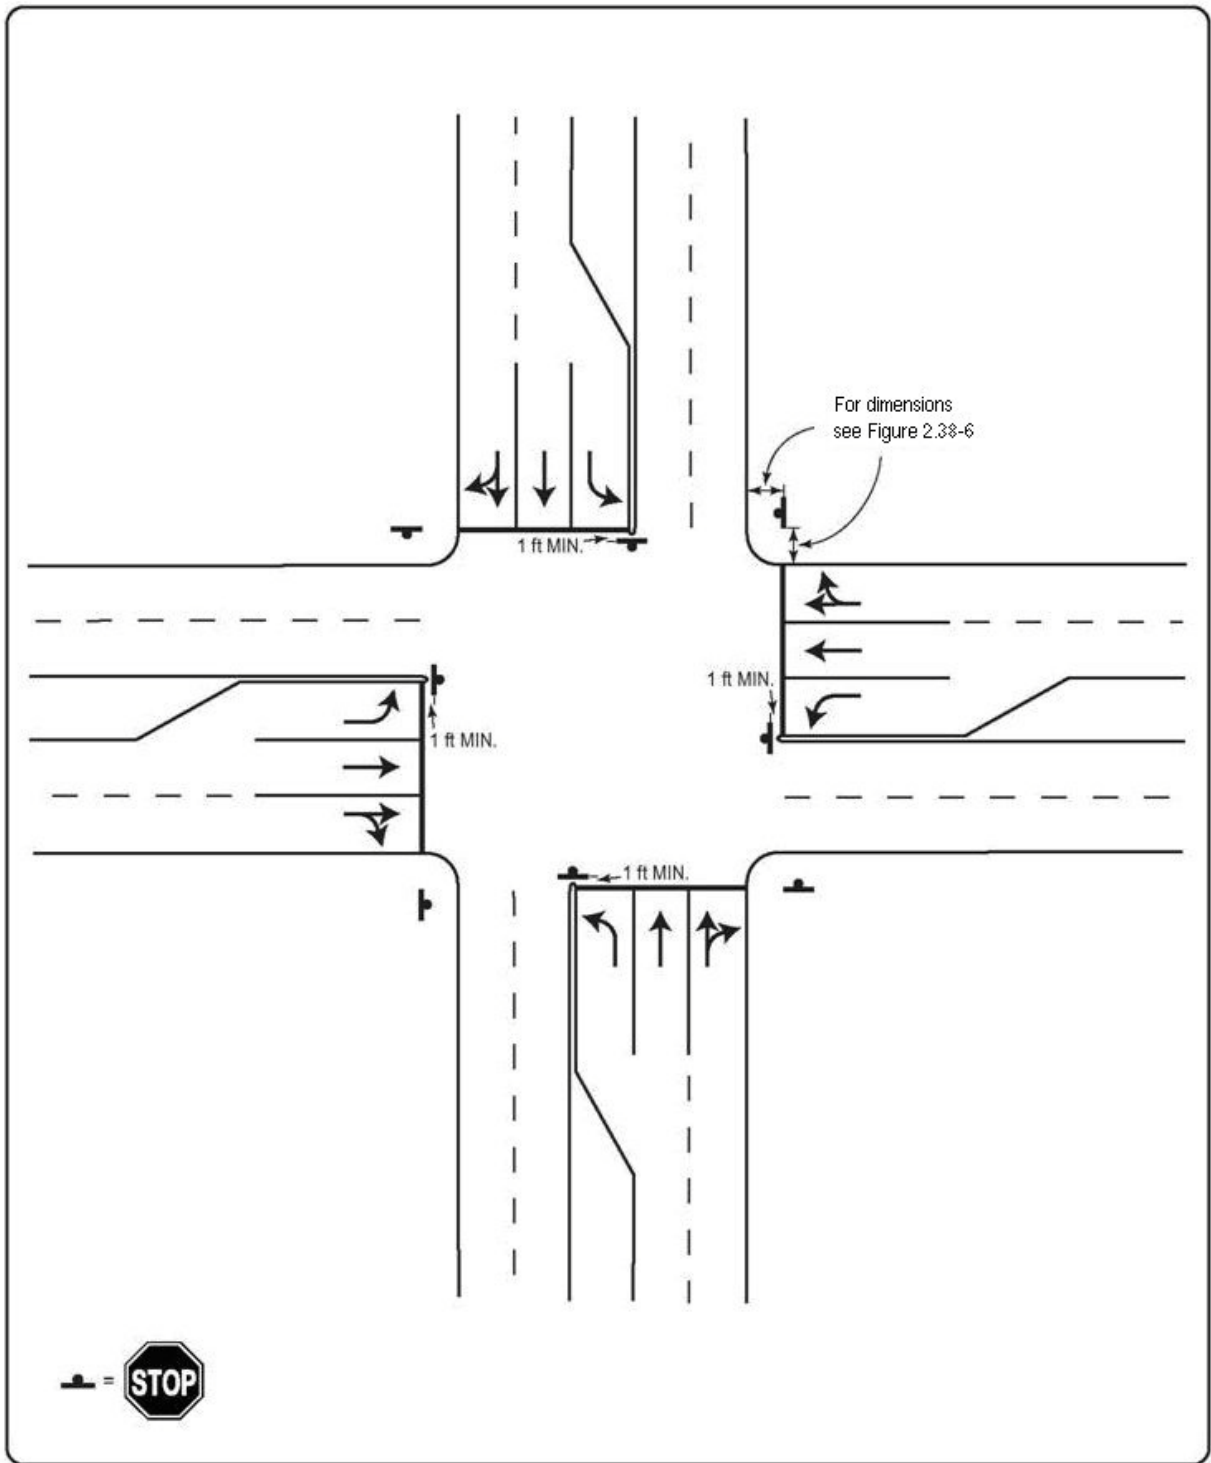


Figure 2.38-3

Temporary Signing for Power Outage – Major Thru Intersection

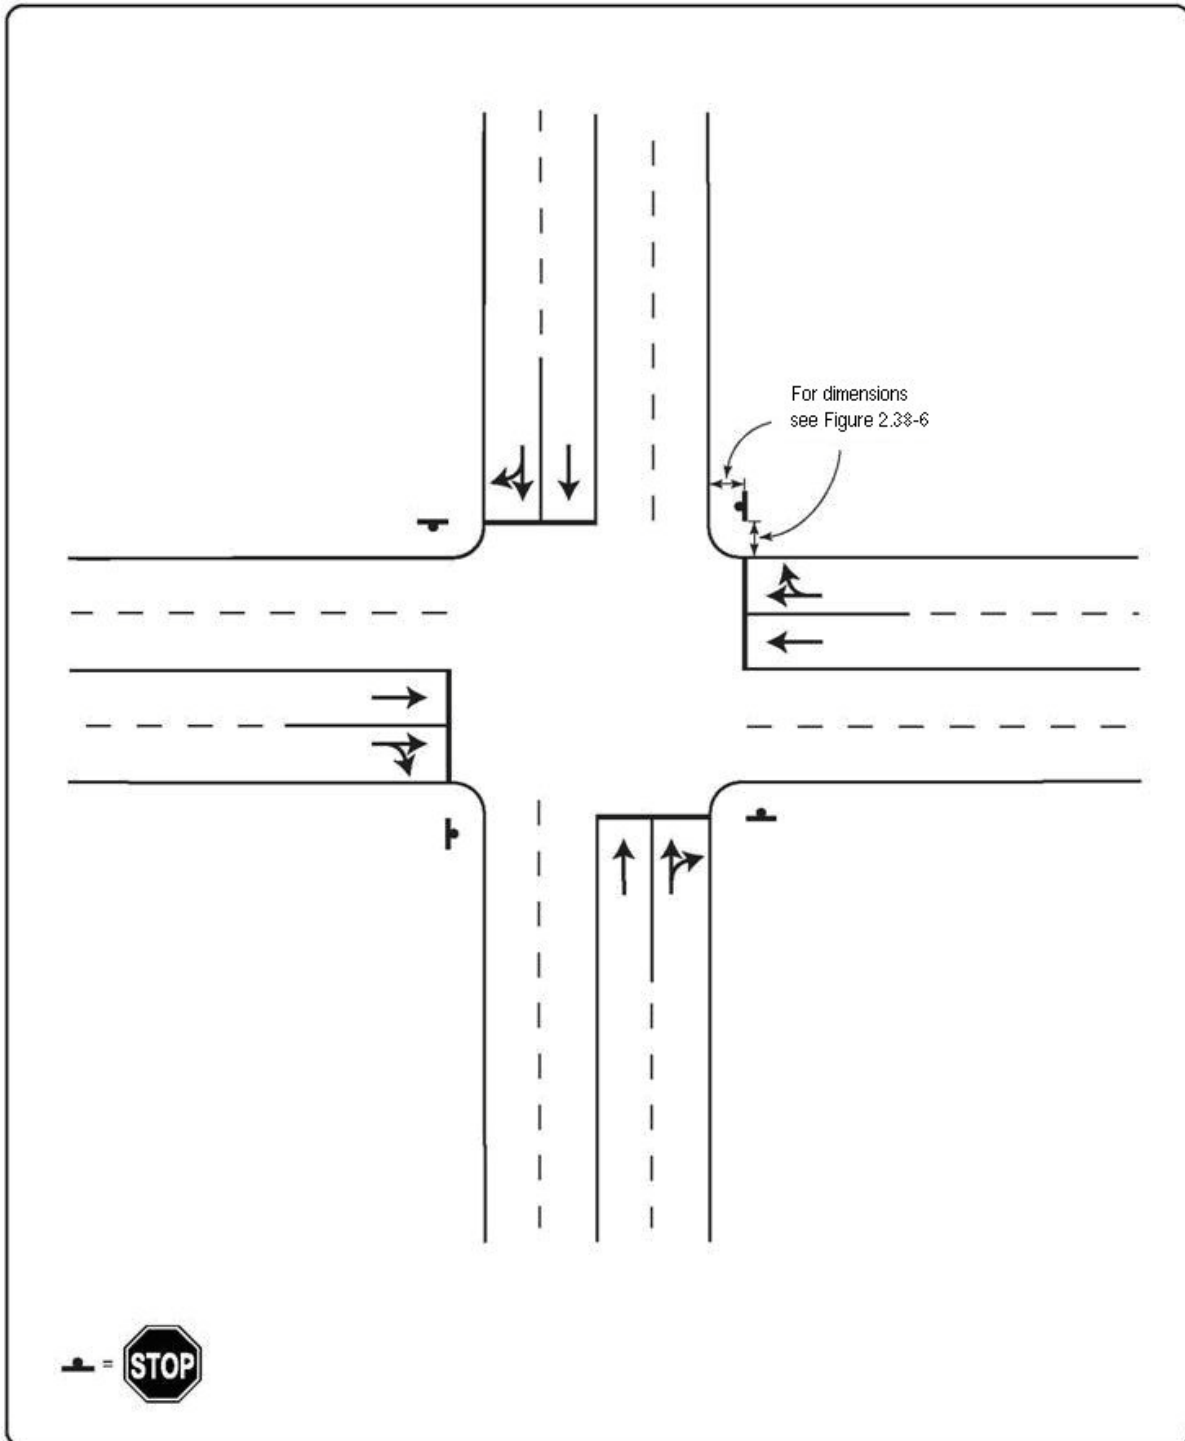


Figure 2.38-4
Temporary Signing for Power Outage – Major to Minor Intersection

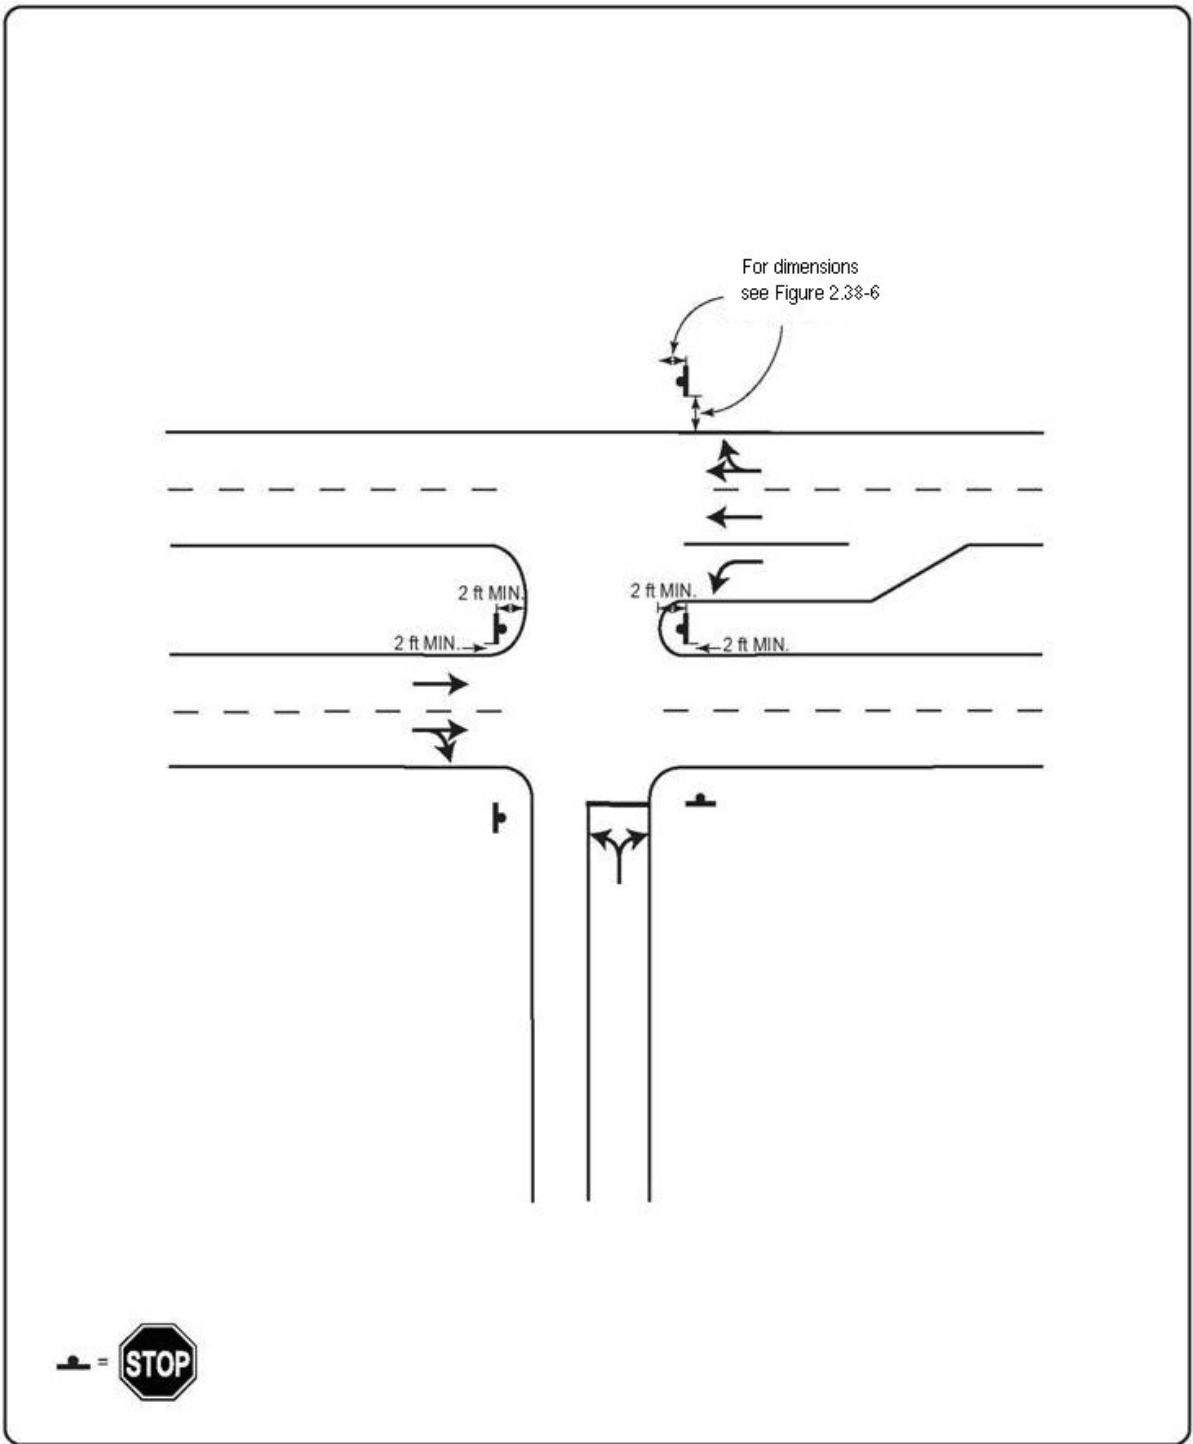


Figure 2.38-5

Temporary Signing for Power Outage – Minor Intersection


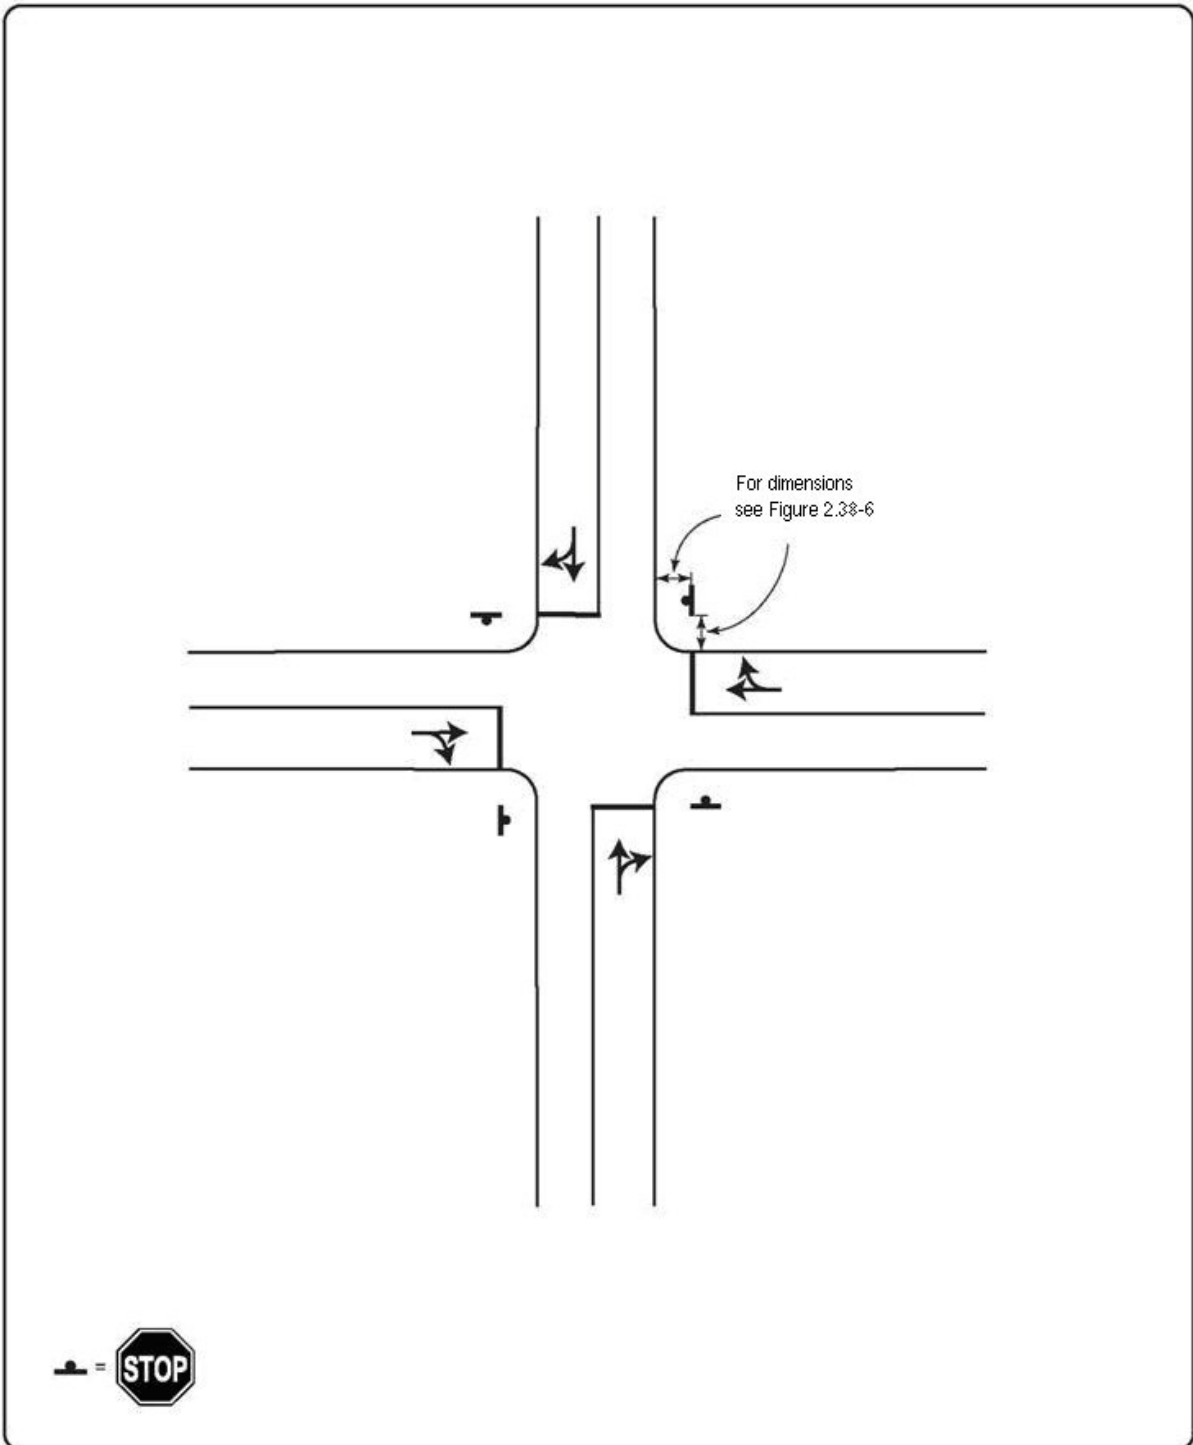


Figure 2.38-6
Temporary Signaling for Power Outage – Sign Dimensions

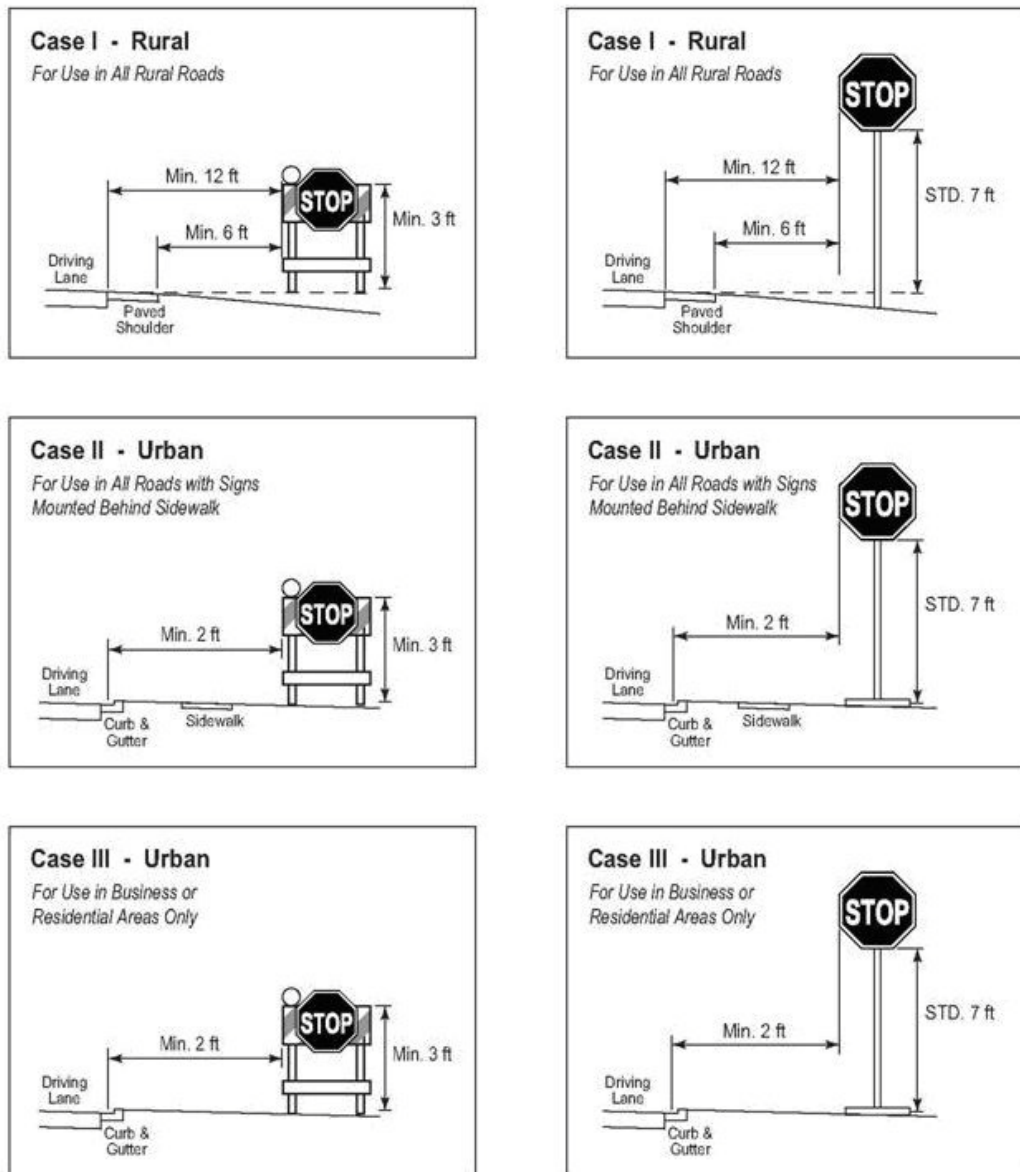

The above sign offset distances and height measurements are from the MUTCD. During a Governor's emergency declaration, these distances may vary at the discretion of the District Traffic Operations Engineer.

Section 2.39

WARNING, STOP, AND YIELD SIGN SIZES

2.39.1 BACKGROUND

- (1) Drivers (65 years and older) experience visual decline and slower reaction time and reduced visual acuity is associated with crash rates. Warning, STOP, and YIELD signs are critical to the safe operation of motor vehicles by all drivers. In order to determine the appropriate sizes that should be used for these critical signs, the State Traffic Engineering and Operations Office conducted a study.
- (2) The minimum required corrected visual acuity to obtain a driver's license in the State of Florida is 20/70. Therefore, this value was selected as the design visual acuity goal for these critical signs. Based on this design goal, the required sizes of Warning, STOP, and YIELD signs were determined and are presented in this section.
- (3) The minimum sign sizes referenced in this section shall be used on all future projects and as replacements when necessary due to sign damage or expiration of useful sign life.

2.39.2 RECOMMENDED WARNING SIGN SIZES

- (1) The recommended symbol warning sign sizes in **Table 2.39-1** meet the design goal for 20/70 visual acuity.

Table 2.39-1		
RECOMMENDED SYMBOL WARNING SIGN SIZES		
SIGN CODE	SIGN SIZE (inches)	SIGN SYMBOL
W3-1	36	Stop Ahead
W3-2	36	Yield Ahead
W3-3	36	Signal Ahead
W3-5	36	Speed Reduction
W11-10	36	Truck Crossing

- (2) The recommended word message warning sign sizes in **Table 2.39-2** meet either the minimum design goal of 20/70 visual acuity or the most acuity available by using a 48-inch diamond shape sign.

Table 2.39-2					
RECOMMENDED WORD MESSAGE WARNING SIGN SIZES					
SIGN CODE	SIGN SIZE (inches)	LETTER SERIES	PRIMARY LETTER HEIGHT (inches)	MINIMUM REQUIRED ACUITY 20/x	SIGN MESSAGE
W5-1	48	D	8	64	Road Narrows
W5-2	48	D	8	64	Narrow Bridge
W5-3	48	C	8	54	One Lane Bridge
W8-1	36	D	10	80	Bump
W8-2	36	E	10	88	Dip
W8-3	48	C	8	54	Pavement Ends
W8-4	48	C	8	54	Soft Shoulder
W8-6	48	C	8	54	Truck Crossing
W8-7	48	D	8	64	Loose Gravel
W8-8	48	D	8	64	Rough Road
W8-9	48	C	8	54	Low Shoulder
W9-1	48	D	8	64	Right Lane Ends
W9-2	48	D	8	64	Lane Ends Merge Left
W13-1	24	E	10	88	35 MPH
W13-2	36 x 48	E	12	106	Exit 25 MPH
W13-3	36 x 48	E	12	106	Ramp 30 MPH
W14-1	48	D	9	72	Dead End

- (3) A No Passing Zone sign (**W14-3**) shall be 36 x 48 inches with 5-inch Series D lettering on the words NO and PASSING and 5-inch Series C lettering on the word ZONE.
- (4) Right-of-way constraints may sometimes limit the size of warning signs. When this occurs, the largest sign that will fit shall be used.
- (5) For any sign that isn't designed for 20/70 visual acuity there will be less legibility distance and therefore less time to perceive and understand the message before passing the sign. However, by adding the following additional distances to the sign placement distances shown in [Table 2C-4, Guidelines for Advance Placement of Warning Signs](#) and referenced in [Section 2C.05 of the MUTCD](#), the same total distance from the point where the sign is just legible to the condition must be maintained. Add 25 feet for 8-inch Series C and 8-inch Series

D letters; 50 feet for 5-inch Series D, 6-inch Series C, and 6-inch Series D letters; and 75 feet for 5-inch Series C letters.

2.39.3 RECOMMENDED STOP SIGN SIZES

- (1) The 48-inch STOP sign provides a minimum required acuity of 20/45. In addition, use of the larger STOP signs, in areas with restricted right-of-way, may present problems. Installation of the STOP AHEAD symbol warning sign will alleviate both of these problems.
- (2) **Table 2.39-3** was produced to determine the required size for the STOP and STOP AHEAD sign, and the sign placement distance for the STOP AHEAD sign.

Table 2.39-3					
STOP AND STOP AHEAD SIGN SIZES AND PLACEMENT					
POSTED SPEED (mph)	STOPPING SIGHT DISTANCE (feet)	STOP SIGN SIZE ¹ (inches)	STOP SIGN RECOGNITION DISTANCE (20/70) (feet)	STOP AHEAD SYMBOL SIGNS ² (inches)	STOP AHEAD SIGN PLACEMENT DISTANCE (feet)
20	150	24	178	---	---
25	200	30	222	---	---
30	250	36	267	36*	125*
35	300	36	267	36*	175*
45	450	36	267	36	325
50	550	48	356	36	425
55	625	48	356	36	500
*If needed for restricted sight distance locations in urban areas.					
¹ On state highways, the 48-inch STOP sign should be considered for 45 mph or greater. STOP signs on roads intersecting the state highway are usually replaced in FDOT construction projects. The sizes in this section are recommended for the replacement signs. Motorists traveling on local roads, in urban areas, expect to encounter STOP signs. STOP signs larger than 36-inches should be used when greater emphasis or visibility is needed.					
² On state highways, in rural areas, motorists may not expect to encounter a STOP sign. As an enhancement, the STOP AHEAD sign should be used for speeds equal to or greater than 45 mph. On local roads, in rural areas, motorists usually expect to stop as they cross a state highway. Where sight distance restrictions exist, a STOP AHEAD sign should be used.					

- (3) The stopping sight distance shown in the table above were calculated using the equation on **Page 113 of AASHTO's A Policy on Geometric Design for Highways and Streets (Green Book, 2004 edition)**, and is for level, wet pavement. The brake reaction time was increased from 2.5 to 3.5 seconds to accommodate drivers aged 65 years and older.

- (4) Both the stopping sight distance and the STOP AHEAD sign placement distance should be increased to compensate for longer stopping sight distance on downgrades.
- (5) The increase due to downgrades as steep as 6 percent does not change the results in Table 2.39-3 for speeds up to and including 35 mph. Table 2.39-4 gives the required additional distance due to downgrade. This increase should be added to both the stopping sight distance and the STOP AHEAD sign placement distance in Table 2.39-3.
- (6) The STOP AHEAD symbol sign should be placed according to **Table 2.39-3**, rather than [Table 2C-4, Guidelines for Advance Placement of Warning Signs](#), referenced in [Section 2C.05 of the MUTCD](#) for Condition B (Stop). The 36-inch size sign has 141 foot legibility for 20/70 visual acuity, which is greater than the required 125 feet.
- (7) If restricted right-of-way requires a STOP sign smaller than shown in this table, the largest possible size should be used and a 36-inch STOP AHEAD symbol sign should be placed according to **Tables 2.39-3** and **2.39-4**.
- (8) If restricted right-of-way demands a STOP AHEAD symbol sign smaller than 36-inch, the 30-inch sign will provide approximately 117 foot legibility. This sign should be placed 10 feet further from the STOP sign than the distance shown in **Tables 2.39-3** and **2.39-4**.

Table 2.39-4		
ADDITIONAL STOPPING SIGHT DISTANCE AND STOP AHEAD SIGN PLACEMENT DISTANCE DUE TO DOWNGRADE		
POSTED SPEED (mph)	ADDITIONAL DISTANCE (3% GRADE) (feet)	ADDITIONAL DISTANCE (6% GRADE) (feet)
45	25	50
50	50	75
55	50	100

- (9) When flashing beacons are used on the STOP sign, the STOP AHEAD sign is optional unless required because of restricted sight distance.

2.39.4 RECOMMENDED YIELD SIGN SIZES

The sizes for YIELD signs shall be as shown in [Table 2B-1 of the MUTCD](#) with a target compliance date of December 22, 2013.

Section 2.40

DISPLAYING MESSAGES ON DYNAMIC MESSAGE SIGNS PERMANENTLY MOUNTED ON THE STATE HIGHWAY SYSTEM

2.40.1 PURPOSE

To provide a listing of approved standard safety messages that can be displayed on permanently mounted Dynamic Message Signs.

2.40.2 BACKGROUND

The list of Approved Standard Safety Messages for Display on Permanently Mounted Dynamic Message Signs was originally part of [Displaying Messages on Dynamic Message Signs Permanently Mounted on the State Highway System Policy \(Topic No. 000-750-015\)](#).

2.40.3 DEFINITIONS

Dynamic Message Sign (DMS). Refers to dynamic, changeable or variable message signs, defined as programmable traffic control devices that display messages composed of letters, symbols/graphics or both. They are used to provide information about changing highway conditions in order to improve operations, reduce accidents, and inform travelers. These signs may inform drivers to change travel speed, change lanes, divert to a different route, or simply to be aware of a change in current or future traffic conditions.

2.40.4 APPROVED STANDARD SAFETY MESSAGES FOR DISPLAY ON PERMANENTLY MOUNTED DMS

- (1) BUCKLE UP / SAVE LIVES
- (2) NO EXCUSES / BUCKLE UP
- (3) BUCKLE UP / JUST DO IT
- (4) CLICK IT / OR TICKET
- (5) DUI DECIDE BEFORE / YOU DRIVE
- (6) PREVENT A TRAGEDY / DON'T DRINK AND DRIVE
- (7) REPORT IMPAIRED DRIVERS / DIAL *347
- (8) REPORT RECKLESS DRIVERS / DIAL*347
- (9) AN ALERT DRIVER CAN / AVOID A CRASH
- (10) KEEP SAFE DISTANCE / STAY SAFE

- (11) MOVE OVER FOR
EMERGENCY VEH
IT'S THE LAW
- (12) MOVE OVER A LANE
FOR EMERGENCY VEH
IT'S THE LAW
- (13) FENDER BENDER
MOVE VEHICLES
FROM TRAVEL LANE
- (14) HEADLIGHTS ON
WHEN RAINING
IT'S THE LAW
- (15) FLORIDA LAW
HEADLIGHTS ON
IN THE RAIN
- (16) DRIVING IN RAIN
LIGHTS ON
FLASHERS OFF
- (17) CHANGING LANES
USE TURN SIGNALS
IT'S THE LAW
- (18) SIGNAL BEFORE
CHANGING LANES
- (19) NO TEXTING
PUT IT DOWN
IT'S THE LAW
- (20) NO TEXTING
PUT IT DOWN
IT CAN WAIT
- (21) SLOW DOWN
SAVE A LIFE
IN WORK ZONES
- (22) WHEN VISIBILITY
IS LOWER
DRIVE SLOWER
- (23) LOOK TWICE FOR
MOTORCYCLES
RIDE RESPONSIBLY

Chapter 3

SIGNALS

Section 3.1

SIGNALIZED INTERSECTION FLASHING MODE OPERATION AND FLASHING BEACONS

3.1.1 DEFINITIONS

- (1) **Flashing Beacon.** A Flashing Beacon is a highway traffic signal with one or more signal sections that operates in a flashing mode. It can provide traffic control when used as an intersection control beacon or as a warning beacon in alternative uses.
- (2) **Flashing Operation of Traffic Control Signals:**
 - (a) **Non-Programmed Flashing Mode Operation.** The automatic transfer from a signalized intersection's normal mode operation (stop and go, steady red-yellow-green displays) to flashing mode operation (stop or caution, flashing red-yellow, or red indications) caused by a malfunction of the signal controller, a conflict in signal displays or manual selection of the flashing mode operation by maintenance or police personnel.
 - (b) **Programmed Flashing Mode Operation.** The automatic transfer from a signalized intersection's normal mode operation (stop and go, steady red-yellow-green displays) to flashing mode operation (stop or caution, flashing red-yellow or red indications) during set times during the day.

3.1.2 RECOMMENDATIONS FOR SIGNALIZED INTERSECTIONS

3.1.2.1 Programmed Flashing Mode Operation

Flashing operation is both energy and operationally efficient and is encouraged when consistent with the following recommendations:

- (1) Flashing yellow/red operation may be used when two-way traffic volumes on the main street are below 200 vehicles per hour.
- (2) Flashing yellow/red operation may be used during any hours of the day or night when [MUTCD Signal Warrants #1 and #2](#) are not met and where the two-way main street volume is greater than 200 vehicles per hour, provided the ratio of main street to side street volume is greater than 4:1.
- (3) Signal operation should be changed to regular operation if crash pattern or severity increases or there is an increase in conflicts.

- (4) A **speedway** effect can be avoided and uniform speeds obtained by maintaining sufficient signals cycling through steady red, green and yellow at proper spacing so as to provide signal progression at an appropriate speed.
- (5) Traffic signals should be put on flashing operation primarily at simple traffic signal controlled intersections where the side street drivers have an unrestricted view of approaching main street traffic. Intersections with more than four legs, skewed intersections (greater than 15 degrees), or railroad preempted signals should not be considered for flash.
- (6) Flashing should be restricted to no more than 3 separate periods in a 24-hour period.

3.1.2.2 Non-Programmed Flashing Mode Operation

All signalized intersections shall automatically transfer to flashing mode immediately (no clearance interval) whenever a malfunction occurs during the normal mode operation of the signalized intersection.

3.1.3 APPLICATION REQUIREMENTS FOR SIGNALIZED INTERSECTION

The signal flashing mode and start-up sequence shall be as follows for:

Yellow-Red Flashing Mode:

- (1) **Main Street.** Flashing yellow during flashing mode, then steady green on start-up sequence.
- (2) **Protected Left Turns.** Flashing red during flashing mode, then steady red on start-up sequence. Protected left turn signals should carry all arrow indications.
- (3) **Side Street.** Flashing red during flashing mode, then steady red on start-up sequence.

Red-Red Flashing Mode:

- (1) **Main Street.** Flashing red during flashing mode, then steady green on start-up sequence.
- (2) **Protected Left Turns.** Flashing red during flashing mode, then steady red on start-up sequence. Protected left turn signals should contain all arrow indications.
- (3) **Side Street.** Flashing red during flashing mode, then steady red on start-up sequence.

3.1.4 HEADS TO BE FLASHED

[Section 4D.30 of the MUTCD](#) requires all signal faces on an approach to be flashed when the signal is in flashing mode operation. Therefore, a left or right turn signal not illuminated during flashing mode operation is unacceptable. [Section 4D.30 of the MUTCD](#) requires the flashing of red or yellow arrow indications.

Pedestrian signal indications (WALK and DON'T WALK) shall not be illuminated during flashing mode operation at signalized intersections.

3.1.5 FLASHING INDICATION COLORS

- (1) The color to be flashed, red or yellow circular indication, or arrow indications shall be determined as follows:
 - (a) Each approach or separately-controlled turn movement that is controlled during normal stop-and-go operation shall be provided with a flashing display.
 - (b) All signal faces on an approach shall flash the same color, either yellow or red circular or arrow. However, separate signal faces for separately-controlled turn movements may be flashed as described in [Section 4D.30 of the MUTCD](#). Flashing yellow indications for through traffic do not have to be shielded or positioned to prevent visual conflict for drivers in separately-controlled turn lanes; however, shielding for separate protected turn movements shall be in accordance with [Sections 4D.22, 4D.23, and 4D.24 of the MUTCD](#).
 - (c) When a signal face consisting entirely of arrow indications is to be put on flashing operation, or when a signal face contains no circular indication of the color that is to be flashed, the appropriate red or yellow arrow indication shall be flashed.
 - (d) When a signal face includes both circular and arrow indications of the color that is to be flashed, only the circular indication of that color shall be flashed. A 5-section head cluster shall be flashed the same color as the approach through lanes. Only circular red or circular yellow indications shall be flashed in a flashing mode operation.
 - (e) No steady green indication or flashing yellow indication shall be terminated and immediately followed by a steady red or flashing red indication without the display of the steady yellow change indication; however, transition may be made directly from a steady green indication to a flashing yellow indication. This applies to both the circular and arrow indications. The transition from stop-and-go to flashing operation, when

the transition is initiated by a signal conflict monitor or by a manual switch, may be made at any time.

- (2) **Main Street, Through Traffic.** From flashing yellow to steady green.
- (3) **Main Street, Separate Left Turn.** From flashing red to steady red.
- (4) **Side Street, Through Traffic.** From flashing red to steady red.
- (5) Green arrow indications which are continuously illuminated during normal operations should be continually illuminated during flashing mode operation.

3.1.6 APPLICATION REQUIREMENTS FOR FLASHING BEACONS

- (1) All existing flashing beacons are considered to meet the **MUTCD** requirements whether they are single or dual indicated.
- (2) However, all new or replacement intersection control beacon installations shall be designed and installed with dual indications. Wherever practical, the dual indications shall both be positioned laterally within each approach width to the intersection. For example, a four-way beacon assembly over each side of a divided four-lane highway does not meet this requirement. In no instance shall intersection control beacon indications on an approach be closer than 8 feet apart measured horizontally.

3.1.7 OPERATION OF FLASHING BEACONS

- (1) **Intersection Control Beacons.** Dual indications for intersection control beacons displaying horizontally aligned red indications shall be flashed simultaneously. Alternate flashing of dual horizontally aligned red indications is reserved for highway approaches to a railroad. Two vertically aligned red signal indications shall be flashed alternately. Refer to [Section 4L.02 of the MUTCD](#).
- (2) **Warning Beacons.** Warning beacons typically are installed at obstructions or to emphasize warning signs. These may be singular or dual indications and may be flashed alternately or simultaneously. Refer to [Section 4L.03 of the MUTCD](#).

Section 3.2

GUIDELINES FOR LEFT TURN TREATMENT

3.2.1 PURPOSE

This guideline can be used to determine the selection of the following types of left turn treatments, as defined in [Section 4D.17 of the MUTCD](#):

- Permissive Only Mode
- Protected/Permissive Mode
- Protected Only Mode
- Split Phasing (each direction alternatively has both left turn green arrow and circular green)

Option:

- (a) A flashing YELLOW ARROW signal indication may be displayed to indicate a permissive left-turn movement in either a protected/permissive mode or a permissive only mode of operation.
- (b) It is not necessary that the left-turn mode for an approach always be the same throughout the day. Varying the left-turn mode on an approach among the permissive only and/or the protected/permissive and/or the protected only left-turn modes, during different periods of the day is acceptable.

3.2.2 LEFT TURN SIGNAL PHASING

- (1) If the need for left turn phasing on an intersection approach has been firmly established, the following guidelines should be used to select the type of left turn phasing to provide. Sound traffic engineering judgment should be exercised in applying these guidelines.
- (2) A protected/permissive mode should be provided for all intersection approaches that require a left turn phase unless there is a compelling reason for using another type of left turn phasing. If the decision between providing protected/permissive or protected only mode is not obvious, the traffic engineer should initially operate the left turn phase as protected/permissive mode on a trial basis. If satisfactory operations result, the protected/permissive mode should be retained. If unsatisfactory operations result, the protected/permissive mode should be converted to protected only mode.
- (3) A protected only mode shall be provided for an intersection approach if any of the following conditions exist:

- (a) Two or more left turn only lanes are provided.
 - (b) Geometric conditions and resulting sight distance necessitate protected only mode.
 - (c) The approach is the lead portion of a lead/lag intersection phasing sequence.
 - (d) The use of offset left turn lanes to the degree that the cone of vision requirements in [Section 4D.13 of the MUTCD](#) for the shared signal display cannot be met.
- (4) A protected only mode may be considered if any of the following conditions exist:
- (a) Speed limit of opposing traffic is higher than 45 mph.
 - (b) Left turn traffic must cross three or more lanes of opposing through traffic.
 - (c) A protected/permmissive mode is currently in use and the number of left turn angle crashes caused by left turn drivers on this approach exceeds six per year.
 - (d) Unusual intersection geometrics exist that will make permmissive left turning particularly confusing or hazardous, such as restricted sight distance.
- (5) A permmissive/protected mode can be used effectively for some intersection approaches if the traffic engineer feels that the advantage to be gained in better progression, as demonstrated in a traffic signal analysis computer program, is worth the violation of driver expectancy. However, use of this type of left turn phasing should be limited and should be restricted to only the following situations which will not create a left-turn trap:
- (a) T-intersections where opposing U-turns are prohibited.
 - (b) Four-way intersections where the opposing approach has prohibited left turns or protected left turn phasing.
 - (c) Four-way intersections where the left turn volumes from opposing approaches do not substantially differ throughout the various time periods of a normal day, so that overlap phasing is not beneficial or required.
- (6) Split phasing can be used effectively if any of the following conditions apply:
- (a) Opposing approaches are offset to an extent that simultaneous left turns from opposing directions would be impossible or hazardous.

- (b) Left turn volumes are extremely heavy on opposing approaches and both are nearly equal to the adjacent through movement critical lane volume.
- (c) Left turn volume is extremely heavy on an approach that does not include a separate left turn lane.
- (d) Drivers are permitted to turn left from more than one lane, but drivers are also permitted to use the right-most left turn lane as a through lane.

3.2.3 LEFT TURN SIGNAL DISPLAYS

The following are the left turn signal displays as referenced in [Section 4D.17 of the MUTCD](#) to be used with the various types of left turn phasing.

- (1) **Protected/Permissive Mode.** A 5-section signal display centered over the lane line between the left turn lane and the left-most through lane should be used. The 5-section signal display could serve as one of the two required through traffic signal heads. No supplemental signing should be provided.
- (2) **Protected Only Mode with a single left turn lane.** A 3-section vertical signal head from top to bottom -- (or left to right in a horizontally-aligned face) left turn red arrow, left turn yellow arrow, left turn green arrow) should be centered over the left turn lane.
- (3) **Protected Only Mode with two or more left turn lanes.** At least two 3-section vertical signal heads (or left to right in a horizontally-aligned face) as described in the paragraph above should be used with one centered over each left turn lane.
- (4) **Split phasing.** A 5-section signal display centered over the lane line between the left turn lane and the left-most through lane should be used. The 5-section signal display could serve as one of the two required through traffic signal heads. No supplemental signing should be provided.

3.2.4 SIGNAL DISPLAY FOR EXCLUSIVE LEFT TURN LANE

A 3-section (red, yellow, and green) signal face shall not be placed over, and/or devoted to, an exclusive left turn lane, unless the signal phasing sequence provides a protected left turn movement during the cycle.

3.2.5 LEFT TURN PHASES FOR SEPARATED LEFT AND THRU LANES

- (1) Left turn lanes at signalized intersections that are separated from through lanes by raised or painted islands may be operated as protected only mode, as protected/permissive or permissive only mode. If protected/permissive mode is

used, the 5-section signal display should be placed overhead on the lane line between the adjacent through lane and the island so as to be obvious that the signal display is shared. In all cases, the cone of vision requirements in [Section 4D.13 of the MUTCD](#) shall be met. Below is an illustrative example using standard lane widths on a 4-lane divided highway. A corresponding table for maximum allowable island width (without shifting the signal head) for the indicated signal head distance from stop line is given.

Figure 3.2-1. Signal Head/Left-turn Treatment


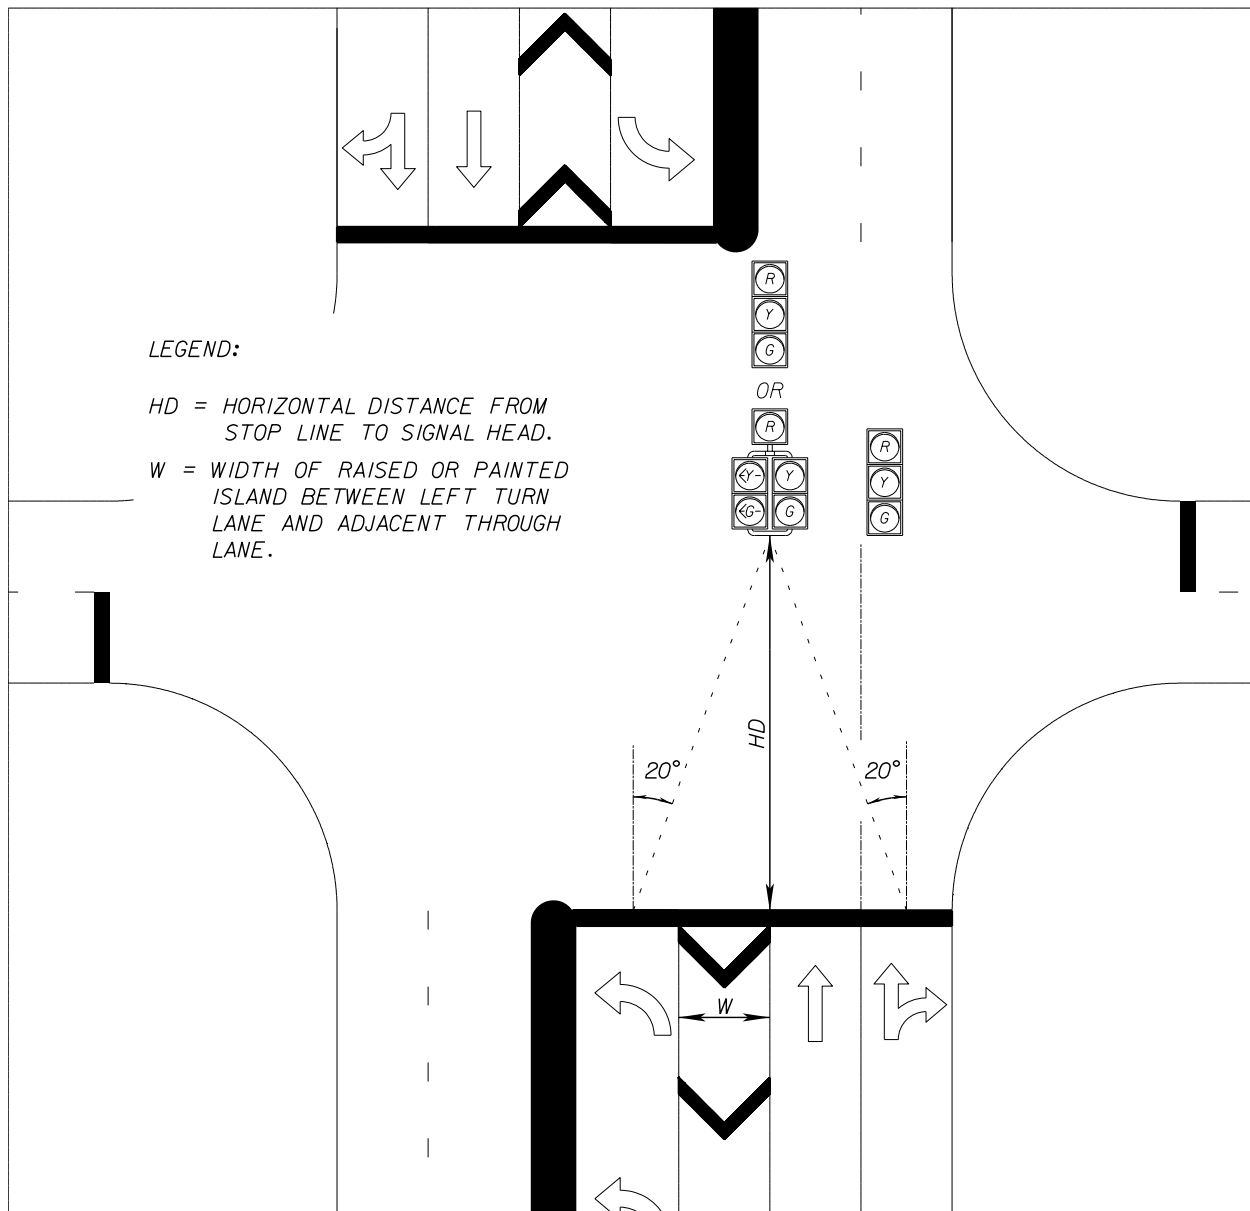


Table 3.2-2. Maximum Width of Hatched-Out Area without Shifting Signal Head

Horizontal Distance	Width
40	8
50	12
60	15
70	19
80	23
90	26
100	30
110	34
120	37
130	41
140	44
150	48

- (2) Signal faces containing circular green signal indication for a permissive only left-turn should not be located above an exclusive left-turn lane or the extension of the lane, nor should they be post-mounted on the far side median in front of the left-turn lane. permissive only left turn signal displays shall not be provided in an exclusive left turn signal face. If the separation or geometric conditions of the offset left turn lane is such that the cone of vision would not be met with a shared signal head positioned on the lane line adjacent to the nearest through lane, the shared signal face may be offset to the left from the adjacent through lane line such that the required cone of vision is still met for the right most through lane and for the left turn lane. This lateral offset spacing should be used only after other options such as increasing the horizontal distance to the signals heads has been considered and placed so as to be obvious that the signal display is shared. The lateral offset spacing of the shared signal head from the adjacent through lane generally should not be greater than one half the width of the island ($\frac{1}{2} W$).
- (3) If the lateral shift is too great, the cone of vision may not be adequate for the driver in the right most through lane. Where the cone of vision cannot be met, protected only mode must be used. This may be due to a large parallel offset left turn lane or due to a tapered or curved offset left turn lane.

Figure 3.2-3. Left Turn Lane Signal Head Shift

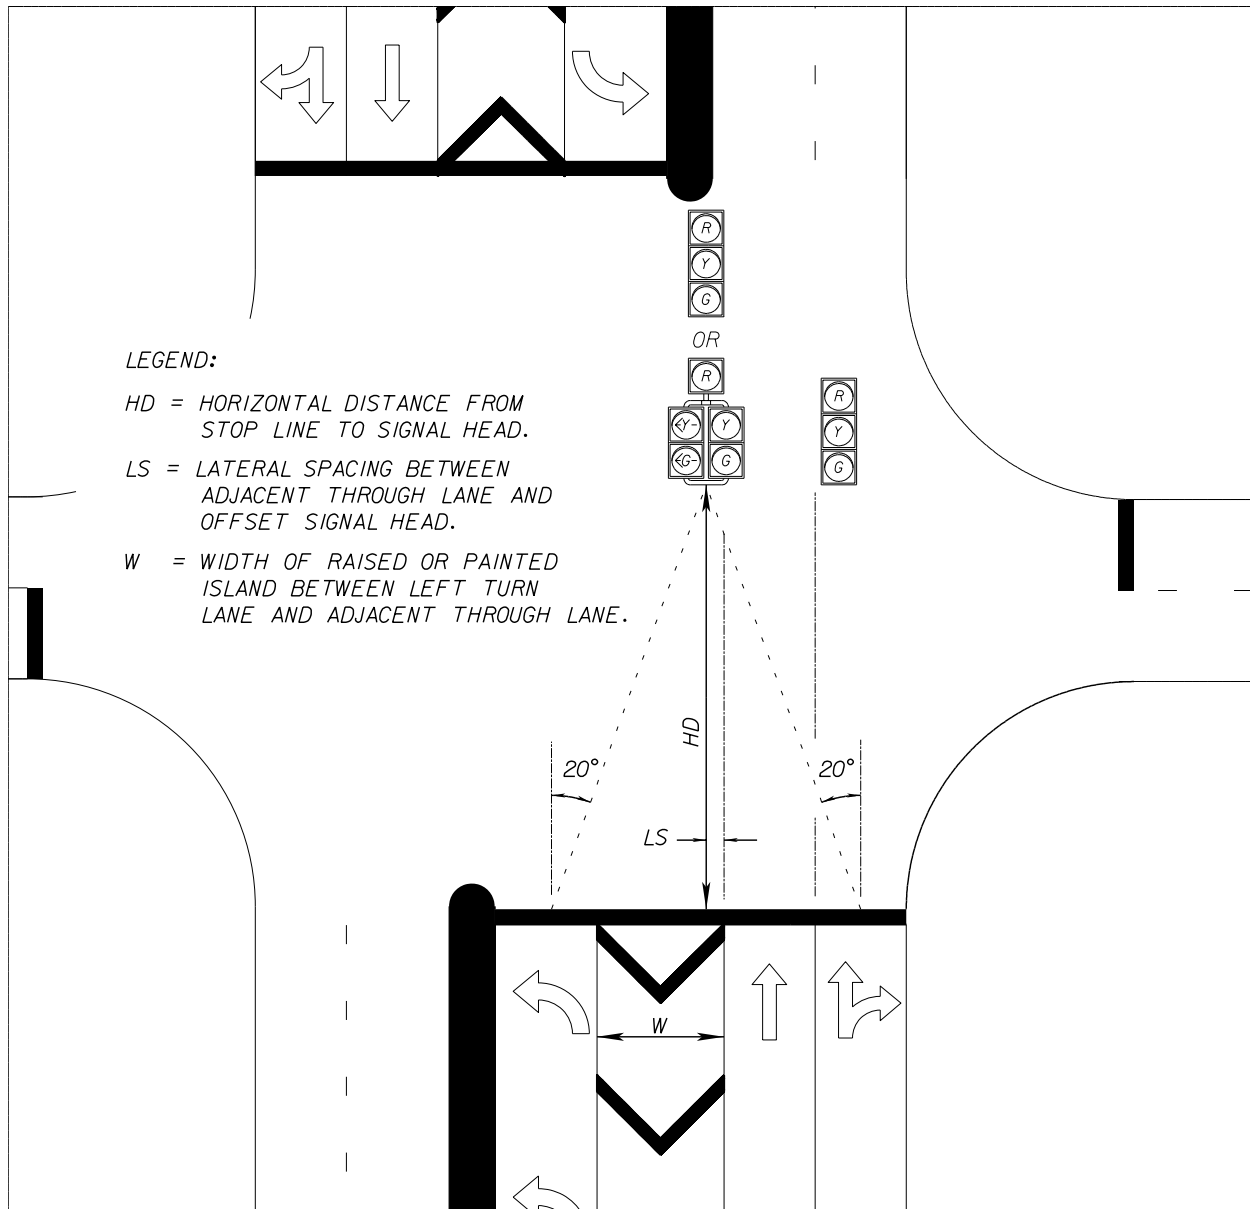

3.2.6 PERMISSIVE ONLY MODE IN MULTI- LEFT TURN LANE APPROACHES

A permissive green interval for two or more left turn lane approaches shall not be used.

Section 3.3

SCHEDULING TRAFFIC SIGNAL STUDIES AND FUNDING ARRANGEMENTS

3.3.1 PURPOSE

To establish criteria for responding to requests for traffic signal installations, for funding and implementation arrangements for warranted signals and scheduling related studies to determine need.

3.3.2 GENERAL

Since the Department is charged with the responsibility to erect and maintain a uniform system of traffic signals and other traffic control devices for regulation, control, guidance, and protection of traffic on the State Highway System, there is need to provide uniformity in responding to requests for signals and in the scheduling and conducting of traffic studies to determine signal needs.

3.3.3 RESPONSE TO SIGNAL REQUESTS AND SCHEDULING TRAFFIC SIGNAL STUDIES

- (1) The District Traffic Operations Office shall objectively review all requests for traffic signal installations received by the Department against existing information and local knowledge of the intersection before agreeing to commit resources for a detailed traffic study. This initial screening may require a brief site visit to view the field conditions. During the initial screening, all data shall be recorded in writing and kept on file. An attempt shall be made to relate all data and analysis to standards set forth in the MUTCD. If the initial screening results in a decision to conduct a signal warrant study, the appropriate District Traffic Operations Office should contact the local government traffic engineering agency, advise them of the Department's decision, and obtain their views and input.
- (2) If the initial screening results in a decision to not consider signalization or further study, the District Traffic Operations Office shall document the reasons and advise the requestor of the findings with a copy to the local government traffic engineering agency. Although local government concurrence is desirable, it is not a prerequisite for committing Department resources to a full signal warrant study.
- (3) The District Traffic Operations Office shall normally conduct signal warrant studies for proposed signal installations on the State Highway System. However, a local government traffic engineering agency may conduct such studies and submit them to the District Traffic Operations Office for review. All studies

shall be conducted in accordance with the procedure and standards prescribed in this document and shall be signed and sealed by a professional engineer.

- (4) Formal *legal* resolutions from local agencies may form the basis of their concurrence in the need for a traffic signal study. However, such documents should not be required by the Department as a prerequisite to scheduling the study. Additionally, the availability of implementation funds should not be a prerequisite to assessing traffic signalization needs (conducting a study).
- (5) The **District Traffic Operations Office** shall keep a log of requests for traffic signal studies and their disposition. To the extent practical, a priority system utilizing the request date, traffic volumes, accident experience, and the level of local government interest should be used to schedule traffic signal studies.

3.3.4 TRAFFIC SIGNAL STUDIES AND ENGINEERING

- (1) Department of Transportation staff, local agency engineers or qualified consulting engineers may perform studies for traffic signals and provide any required engineering services for the preparation of implementation plans and specifications for proposed traffic signals on the State Highway System. However, the Department is responsible for requiring and overseeing such work.
- (2) Traffic signal studies shall be made in accordance with Department **Topic No. 750-020-007, Uniform Traffic Engineering Studies**, particularly, **Chapter 12 of the Manual on Uniform Traffic Studies (MUTS)**, referred therein. Plans and specifications, if required, shall be prepared in accordance with established Department procedures.
- (3) Traffic signal studies or engineering analyses conducted for new, or proposals for significantly revised, private access points to major traffic generators shall be conducted by qualified traffic engineers at no cost to the Department. Except under unusual circumstances, these studies and/or analyses shall be part of the **Driveway Permit Application** as per the requirements of **Rule 14-96**. These studies shall, in addition to evaluating the need for signal control at unsignalized intersections, also consider enhanced features at existing signalized intersections, as appropriate. Such study and report shall be signed and sealed by a professional engineer. Likewise, engineering costs associated with the preparation of implementation plans and specifications should also normally be borne by the developer. There may be instances where the Department determines that specific critical design requirements make it essential that the engineering work be performed by Department forces. In such instances, the District Secretary may direct that the engineering work be done by the Department at no cost to the developer.

- (4) Studies and engineering at existing private access points which may be required as a result of normal traffic growth are usually made by qualified traffic engineers by the requestor. In extraordinary situations the Department may elect to do so.

3.3.5 FUNDING ARRANGEMENTS FOR WARRANTED NEW SIGNAL INSTALLATIONS

- (1) New traffic signal installations on the State Highway System may be funded from private, local, state, or federal funds, or any combination of such funds.
- (2) The developers shall totally fund the installation of any new traffic signal and/or the enhancements of any existing traffic signals when these improvements are requirements specified in a new or revised Driveway Permit or local government Development Order. If proposals to provide signalization or modify existing signalization is above the minimum required by Permit or Development Order and provides a betterment to the State Highway System substantially beyond mitigation for development impacts, the Department's District Secretary may determine an appropriate financial participation formula and assign percentages of participation to the developer in consideration of the specific conditions at each site.
- (3) Although signal installation on the State Highway System is the responsibility of the Department, local governments may contribute, on a voluntary basis, a portion, or all of the cost of signal installation depending upon specific cooperative arrangements worked out between the Department's District Offices and the local agency. Local funds are most often utilized in these cooperative efforts to advance the implementation schedule of a warranted traffic signal. When local funds are accepted by the Department, a formal joint project agreement executed by both parties is necessary.
- (4) Most local governments in Florida's urban areas have qualified traffic engineering organizations with experienced traffic signal field crews and many new signals have been installed on the State Highway System using local agency installation crews with control hardware supplied by the Department. Where the local agency is agreeable to this procedure (most are because of their maintenance and operational involvement in these sites), this technique should be encouraged. No formal agreement is necessary since no money is changing hands; however, a letter from the local agency agreeing to install Department supplied hardware should be obtained.

3.3.6 OTHER CONSIDERATIONS

- (1) Prior to purchase, use, or installation, traffic signals must comply with provisions of **Section 7.1, Approved Product List Certification and Approval Process** in this manual.

- (2) Prior to installation of traffic signals, compliance with [Topic No. 750-010-022, Traffic Signal Maintenance Agreements](#), is necessary.

Section 3.4

EMERGENCY TRAFFIC CONTROL SIGNALS

3.4.1 PURPOSE

To provide guidance for warranting, designing, and operating emergency traffic control signals at locations where emergency vehicles, most commonly fire trucks, need special traffic signal assistance to egress onto the street system.

3.4.2 BACKGROUND

The Department's district offices often receive local public agency requests for traffic signal control for the departure of emergency vehicles. This section was developed to give comprehensive guidance to determine if the signals are warranted.

3.4.3 PROCEDURE

The need for an Emergency Traffic Control Signal shall be considered if an engineering study finds that one of the following warrants are met:

- (1) Minimum Traffic Volumes (Both directions of travel, based on signal warrant #2), as shown in **Table 3.4-1**.

Table 3.4-1. Minimum Traffic Volumes		
Roadway	Peak Hour	or
		24 Hours
2-Lane	750 VPH	7500 ADT
4-Lane	900* VPH	9000* ADT
6-Lane or more	1200* VPH	12000* ADT
*Values shall be increased by 1/3 when arterial has traffic signal system coordination with signals located within 1000 feet in both directions from the emergency signal location.		

- (2) When the geometric design of the arterial and emergency vehicle facility is such that the vehicle when returning must *back in*, and to do so must block traffic when performing this maneuver and the traffic volume and speeds are such that the use of emergency vehicle lights and flaggers have been ineffective in controlling traffic.
- (3) When the location of the emergency vehicle driveway consistently conflicts with the normal traffic queue from an adjacent signalized intersection. The use of DO NOT BLOCK INTERSECTION (**R10-7**) sign should be considered in conjunction with the emergency signal installation.

- (4) On all approaches when vertical or horizontal curvature or other obstructions do not provide adequate stopping sight distance for traffic approaching an emergency vehicle driveway.

3.4.4 CONFIGURATION AND OPERATION OF EMERGENCY TRAFFIC CONTROL SIGNALS

- (1) [Section 4G.03 of the MUTCD](#) defines the operational requirements for a *mid-block* location of an emergency signal. The **MUTCD** allows either a steady green or flashing yellow operation of signal heads between emergency vehicle actuations. These choices of operation, combined with limited details for signal configuration requirements have resulted in a lack of uniformity of emergency signal design and operation within the State, therefore, the following criteria shall be followed.
- (2) Based on requirements contained in [Chapter 4G of the MUTCD](#), the following criteria for emergency traffic control signals shall be followed for new or reconstructed installations.
 - (a) Dual indications shall be provided for each roadway approach. A minimum of one signal face shall be installed for the emergency vehicle driveway but two indications are preferable.
 - (b) If the emergency service is located off the main roadway and emergency vehicles access the main roadway via a public access street, emergency signals may be erected at the intersection of these roadways. If this practice is followed, dual indication shall be used on the public access street, with the signals resting on the flashing red indication.
 - (c) Mid-block emergency signals shall be operated as flashing yellow between emergency vehicle actuations. Roadway signal head configuration shall consist of three sections and shall be operated as shown in **Figure 3.4-2**. (The use of special technological signal devices may be selected, i.e., strobe signals, LED, or solar power. These devices may require temporary permitting prior to installation.)
 - (d) Signal operation at intersections which are pre-empted by emergency vehicles entering the roadway near or at the intersection should be designed on an individual basis.
- (3) It is not practical to outline all possible situations which may be encountered in the field. Such factors as emergency vehicle route distance between the intersection and emergency vehicle driveway, intersection geometrics, number of lanes, normal queue length, traffic volumes, etc., should be considered.


3.4.5 EMERGENCY SIGNAL SIGN (R10-13)

- (1) As emergency signals are installed at locations along major arterials where emergency vehicles enter the roadway, the EMERGENCY SIGNAL sign (**R10-13**), shall be placed on the span wire or mast arm to identify the purpose of the signal to the driver.
- (2) The EMERGENCY SIGNAL sign (**R10-13**) shall be legible at all times, shall be mounted adjacent to each signal face, and shall be located between the dual signal indications on each roadway approach.
- (3) No sign is required for the emergency vehicle driveway approach.

3.4.6 OTHER REQUIREMENTS

- (1) A controller timing chart shall be a part of the contract plans.
- (2) A Maintenance Agreement shall be required for all Emergency Signals on the State Highway System.
- (3) A signal timing study is required to determine proper clearance intervals.

Figure 3.4-2. Mid-Block Emergency Signal Operation

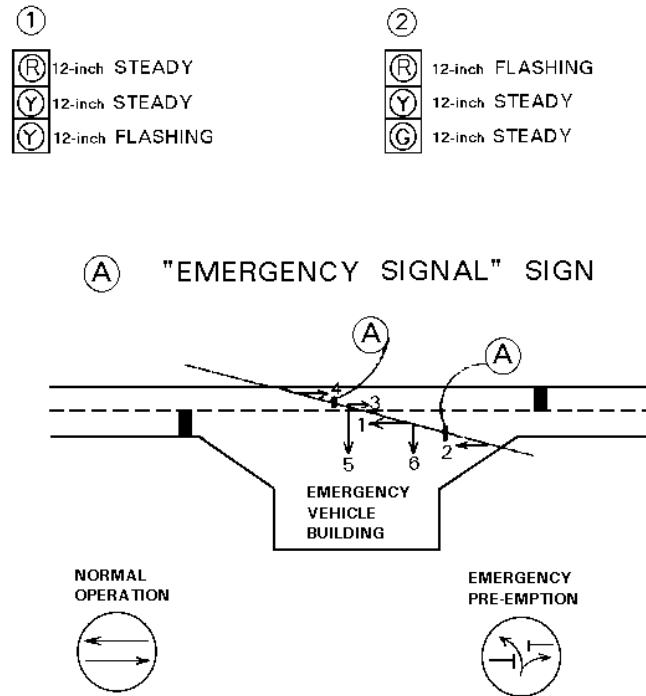

SIGNAL	NORMAL OPERATION	CHANGE TO EMERGENCY PRE-EMPTION	EMERGENCY PRE-EMPTION	CHANGE FROM EMERGENCY PRE-EMPTION	RELEASE
1,2,3,4	G or FY	Y	R	R	G or FY
5,6	BLANK	BLANK	G	BLANK	BLANK

Section 3.5

TRAFFIC SIGNAL MAST ARM SUPPORT BOUNDARIES

3.5.1 GENERAL

The [*Department's Plans Preparation Manual, Topic No. 625-000-007, Volume 1 – Chapter 7*](#) requires that all traffic signals installed on the State Highway System that are within the Mast Arm Structures Boundary shall be supported by mast arms.

3.5.2 IMPLEMENTATION

3.5.2.1 Mast Arm Structures Boundary Maps

The mast arm structures boundary map follows an alignment of state roads that are parallel to an approximate ten mile distance to the coastline. Official mapping of this boundary is maintained on a Map Info-Base by the State Traffic Engineering and Operations Office. Links to current district maps are provided below:

[*District 1*](#)

[*District 2*](#)

[*District 3*](#)

[*District 4*](#)

[*District 5*](#)

[*District 6*](#)

[*District 7*](#)

Section 3.6

STANDARDIZATION OF YELLOW CHANGE AND RED CLEARANCE INTERVALS FOR SIGNALIZED INTERSECTIONS

3.6.1 PURPOSE

The purpose of the yellow change and red clearance intervals is to provide a safe transition between two conflicting traffic signal phases. The function of yellow change interval is to warn traffic of an impending change in the right-of-way assignment and the function of the red clearance interval is to provide additional time following the yellow change interval to clear the intersection before conflicting traffic is released. The Manual on Uniform Traffic Control Devices ([MUTCD](#)) states that a yellow change interval should have a minimum duration of 3 seconds and a maximum duration of 6 seconds and a red clearance interval should have duration not exceeding 6 seconds. The intent of this section is to provide a standard for uniform application of yellow and red intervals.

All new signal installations, intersections that have a Traffic Infracton Detectors installed, any signal that has signal phasing changes, geometric changes affecting the timing or phasing, or corridor re-timing projects must comply with these standards immediately upon implementing timing changes. All other existing signalized intersections on the State Highway System must be in compliance with standards of this section by June 30, 2015.

3.6.2 STANDARD

- (1) [Section 316.075\(3\)\(a\), F.S.](#) states that no traffic control signal device shall be used which does not exhibit a yellow or "caution" light between the green or "go" signal and the red or "stop" signal. The Statute is silent on the yellow clearance interval duration and does not mention nor mandates the use of a red clearance interval.
- (2) The Institute of Transportation Engineers (ITE) formula shall be used to calculate yellow change interval. Yellow change intervals shall not be lower than the values shown in Table 3.6-1 for a given posted speed limit (PSL) even if the ITE formula produces a lower value. Yellow change intervals calculated to be lower than 3.4 seconds shall be set at no less than 3.4 seconds. The yellow interval shall not exceed 6 seconds. Any yellow change intervals that are greater than the standard yellow change intervals presented in Table 3.6-1 of this section, for a given PSL, are allowed, but they shall be based on [MUTCD's Section 4D.26](#), engineering practice and the ITE formula. However, for a given PSL, the yellow change intervals shall not be less than the standard values presented in Table 3.6-1.
- (3) A Perception Reaction Time (PRT) of 1.4 seconds shall be used. Yellow change and red clearance interval times shall be rounded up to the nearest 0.1 second.
- (4) Approach speed used in this section is the PSL for the approach being analyzed.

3.6.2.1 Yellow Change Interval

- (1) Recent research has found that the 85th percentile PRT value was 1.33 seconds. Based on the research results, a PRT of 1.4 seconds shall be used.
- (2) The Florida yellow change intervals shown in **Table 3.6-1**, are computed using **Formula 3.6-1** (found in *ITE's Traffic Engineering Handbook*) with a PRT of 1.4 seconds and a grade of 0%. These intervals are the required standard minimum values.

Table 3.6-1. Florida Yellow Change Interval (0.0 % Grade) Standards*

APPROACH SPEED (MPH)	YELLOW INTERVAL (SECONDS)
25	3.4
30	3.7
35	4.0
40	4.4
45	4.8
50	5.1
55	5.5
60	5.9
65	6.0

* For approach grades other than 0%, use ITE Formula.

Formula 3.6-1

$$Y = t + \frac{1.47v}{2(a + Gg)}$$

Where:

- Y = length of yellow interval, sec.
- t = perception-reaction time (use 1.4 sec.)
- v = speed of approaching vehicles, in mph.
- a = deceleration rate in response to the onset of a yellow indication (use 10 ft/sec²)
- g = acceleration due to gravity (use 32.2 ft/sec²)
- G = grade, with uphill positive and downhill negative (percent grade /100)

3.6.2.2 Red Clearance Interval

A red clearance interval must be used. Providing adequate red clearance intervals can significantly impact intersection safety by reducing the probability of occurrence of right angle crashes, even if drivers run the red signal indication. The red clearance interval shall be

determined using engineering practices. The values are typically computed using **Formula 3.6-2**, found in *ITE's Traffic Engineering Handbook*.

Formula 3.6-2

$$R = \frac{W + L}{1.47v}$$

Where:

- R = length of red interval, sec.
- W = width of the intersection, in feet, measured from the near-side stop line to the far edge of the conflicting traffic lane along the actual vehicle path.
- L = Length of vehicle (Use 20 ft.)
- v = speed of approaching vehicles, in mph.

The minimum red clearance interval shall be 2.0 seconds and the maximum red clearance interval should normally not exceed 6.0 seconds. Longer red intervals than the minimum 2.0 seconds can be used at the engineer's discretion where width of intersection, sight distance, complex intersections, crash history and any unique conditions exist that may warrant longer red times. The determination shall be based on engineering judgment. The National Cooperative Highway Research Program (NCHRP) Report 731 recommends using a modified ITE formula that allows for 1.0 second reduction due to reaction time delay from the conflicting movement. Therefore, a 1.0 second reduction may be made in the values computed from Formula 3.6-2 and applying engineering judgment. However, the red clearance interval shall be no less than 2.0 seconds.

Section 3.7

AUDIBLE PEDESTRIAN SIGNALS

3.7.1 PURPOSE

To establish criteria for the installation and operation of audible pedestrian signal heads on the State Highway System.

3.7.2 GENERAL

- (1) [Section 4E.09 of the MUTCD](#) establishes the standards for which audible pedestrian signals shall be installed on the State Highway System. [Section 4E.06](#) also contains guidance and support that should be reviewed and considered on any audible signal installation request.
- (2) The **MUTCD** does state that pedestrians with vision disabilities who cross streets at signalized intersections initiate their crossing when they hear the traffic in front of them stop and the traffic alongside them begin to move, corresponding to the onset of the green interval. This technique is effective at most signalized intersections; therefore, the vast majority of signalized intersections will not require any audible pedestrian signals.

3.7.3 PROCEDURE

- (1) Any audible pedestrian signal that is installed on the State Highway System shall be reviewed and approved by the District Traffic Operations Engineer prior to installation.
- (2) Requests for audible signal installations received from the public, maintaining agencies, or agencies and/or support groups for the visually impaired shall be reviewed by the District Traffic Operations Engineer with input, if necessary, from visually impaired agencies and/or support organizations to determine if the audible signal would be effective and/or safe for operation.
- (3) An engineering study shall be conducted if the initial District Traffic Operations Engineer's review supports the installation of the audible pedestrian signal.
- (4) The following criteria should be considered before approving an audible pedestrian signal.
 - (a) Engineering study to assess the need.
 - (b) Right on red movements.
 - (c) Continuous right turn movements.

- (d) Complexity of signal phasing.
 - (e) Complexity of intersection geometry.
 - (f) Traffic volumes during times when pedestrians might be present.
 - (g) Audible tones or sounds that may cause confusion.
 - (h) Verbal messages instead of tones or sounds.
 - (i) Vibrotactile pedestrian devices.
 - (j) Pushbutton or passive pedestrian detectors.
 - (k) Sufficient audible above ambient noise, 89db (decibels) maximum.
 - (l) Installations at locations with more than four lanes and/or greater than 35 MPH posted speed limit shall be given additional considerations for geometrics, operations, and pedestrian safety.
 - (m) Consideration for audible signal installations other than at mid-block locations (i.e. transit corridors or hubs) shall be installed only after review and approval by the District Traffic Operations Engineer.
- (5) If the proposed location is a wide crossing where pedestrian storage is required in the median area, then an audible pedestrian signal installation is not recommended.

3.7.4 APPROVAL/DENIAL PROCESS

- (1) The District Traffic Operations Engineer shall objectively review all requests for audible pedestrian signals received by the Department from an engineering study and/or local request before agreeing to approve the installation.
- (2) The initial review may require a brief site visit to view the field conditions. During the initial screening, all data shall be recorded in writing and kept on file. An attempt shall be made to relate all data and analysis to standards set forth in [Section 4E.09 of the MUTCD](#).
- (3) If the initial review results in a decision not to consider the audible pedestrian signal head, the District Traffic Operations Engineer shall document the reasons and advise the requestor of the findings with a copy provided to local government's Traffic Engineering Office. Although local government concurrence is desirable, it is not a prerequisite for committing Department resources for an audible pedestrian signal installation.

Section 3.8

MID-BLOCK PEDESTRIAN CROSSWALKS

3.8.1 PURPOSE

To establish criteria for the installation and operation of mid-block pedestrian crosswalks on the State Highway System.

3.8.2 GENERAL

- (1) Mid-block crosswalks are intended to improve pedestrian connectivity and reduce instances of pedestrians crossing at random and unpredictable locations which can create confusion and add risk to themselves and other road users. Mid-block pedestrian crosswalks may be an appropriate tool to safely accommodate pedestrians at locations where there is a documented pedestrian demand and the distance to the nearest intersection crossing location would result in significant out-of direction travel for pedestrians.
- (2) Mid-block crosswalks that are well located and thoughtfully designed can serve as a mechanism for improving pedestrian connections, community walkability, and pedestrian safety. However, they are not suitable for all locations and careful evaluation must be undertaken regarding expected levels of pedestrian crossing demand, safety characteristics of the crossing location, and design considerations for the crossing control type.

3.8.3 DEFINITIONS

- (1) **Marked crosswalk.** Any portion of a roadway at an intersection or elsewhere distinctly indicated for pedestrian crossing by lines or other markings on the surface. Marked crosswalks serve to highlight the right-of-way where motorists can expect pedestrians to cross and designate a stopping location.
- (2) **Mid-block location.** Any location proposed for a marked crosswalk on a roadway with an uncontrolled approach.
- (3) **Pedestrian attractor.** A residential, commercial, office, recreational, or other land use that is expected to be an end destination for pedestrian trips during a particular time of day.
- (4) **Pedestrian generator.** A residential, commercial, office, recreational or any other land use that serves as the starting point for a pedestrian trip during a particular time of day.

- (5) **Pedestrian Hybrid Beacon.** An experimental pedestrian actuated traffic control device that provides a dark indication to motorists until activated by a pedestrian at which time a solid red indication is provided to motorists to direct them to stop. The solid red indication advances to a flashing red indication that allows motorists to proceed with caution once a pedestrian is clear.
- (6) **Rectangular Rapid Flashing Beacon.** An (RRFB) consists of two rapidly and alternately flashing rectangular yellow indications having LED-array based pulsing light sources that function as a warning beacon.
- (7) **Two-stage marked mid-block crosswalk.** A marked crosswalk that is designed to require pedestrians to cross each half of the street independently, with the median serving as a refuge area for pedestrians to wait before completing the crossing.

3.8.4 PROCEDURE

- (1) Any marked crosswalk proposed for an uncontrolled location on the State Highway System shall be reviewed and approved by the appropriate District Traffic Operations Engineer prior to installation.
- (2) A request from a State agency or local government shall be submitted to the appropriate District Traffic Operations Engineer. Non governmental entities wishing to obtain authorization for a mid-block crosswalk shall do so through the local government with jurisdictional authority.
- (3) If the District Traffic Operations Engineer's review of available information supports the installation of a mid-block pedestrian crosswalk based upon the criteria outlined in **Section 3.8.5**, then a full engineering study may be conducted.
- (4) The criteria referenced in **Section 3.8.5**, as documented in an engineering study, shall be met as a condition for approval of a proposed marked crosswalk at an uncontrolled location. Within the engineering study, the following information shall be provided:
 - (a) Document field data to demonstrate the need for a crosswalk based upon minimum pedestrian volumes and availability of any alternative crossing locations that satisfy the criteria described in **Section 3.8.5**. The [Department's Manual on Uniform Traffic Studies \(MUTS\)](#) provides additional information on obtaining Pedestrian Group Size and Vehicle Gap Size field data for use in making assessments of opportunities for safe crossings at uncontrolled locations.

- (b) Document potential links between pedestrian generators and attractors. This information is required for establishing the mid-block crossing location or to confirm existing pedestrian crossing patterns.
 - (c) Document all safety considerations as described in **Section 3.8.5(5)** with respect to stopping sight distances, illumination levels, and proximity to intersection conflict areas.
 - (d) Document the proposed crossing location and corresponding signing, marking, and signal treatments (if applicable). A schematic layout should be provided over aerial photography or survey to show locations of signs, markings, and other treatments in proximity to existing traffic control devices.
 - (e) Document any pedestrian-vehicle crash history within the vicinity of the proposed mid-block crosswalk that has occurred based upon a minimum three years of data. Also, from field observation, document the number and nature of any near-miss pedestrian-vehicle conflicts.
- (5) If the evaluation results in a decision not to consider the installation of a mid-block crosswalk, the District Traffic Operations Engineer shall document the reasons and advise the requestor of the findings. Meeting the minimum criteria outlined in this section does not guarantee approval of a request.
- (6) Prior to the approval of a mid-block pedestrian crossing, coordination is necessary between the appropriate District Traffic Operations Office and local agencies to determine and document responsibilities for maintenance of any proposed traffic control devices.

3.8.5 INSTALLATION CRITERIA AND CONSIDERATIONS

- (1) Placement of mid-block crosswalks should be based upon an identified need and not used indiscriminately. Important factors that should be considered when evaluating the need for a mid-block crosswalk include:
- (a) Proximity to significant generators
 - (b) Pedestrian demand
 - (c) Pedestrian-vehicle crash history
 - (d) Distance between crossing locations
- (2) To be considered for a mid-block pedestrian crosswalk, a mid-block location shall meet all the criteria in **Sections 3.8.5(3) and 3.8.5(4)**. The only exception to this

criterion is within a school zone, where there is no minimum pedestrian volume for a school crossing.

(3) Minimum Levels of Pedestrian Demand

- (a) Any location under consideration for a possible mid-block crosswalk should exhibit (1) a well defined spatial pattern of pedestrian generators, attractors, and flow (across a roadway) between them or (2) a well defined pattern of existing pedestrian crossings. Generators and attractors should be identified over an aerial photograph to illustrate potential pedestrian routes in relation to any proposed mid-block crosswalk location.
- (b) Sufficient demand should exist that meets or exceeds the thresholds for three consecutive days of data collection. Data collection should be based upon pedestrian volumes observed crossing the roadway outside a crosswalk at or in the vicinity of the proposed location, or at an adjacent (nearby) intersection.
 - Minimum of 20 pedestrians during an hour (any four consecutive 15-minute periods).
 - Minimum of 60 pedestrians during any 4 hours of the day, not necessarily consecutive hours.

(4) Minimum Location Characteristics

- (a) A minimum vehicular volume of 2,000 Average Daily Traffic (ADT) along the roadway segment.
- (b) Minimum distance to nearest alternative crossing location is 300 feet per the *Department's Plans Preparation Manual, Vol. 1, Section 8.3.3.2*. An alternative pedestrian crossing location may be considered to be any controlled location with a STOP sign, traffic signal, or a grade-separated pedestrian bridge or tunnel that accommodates pedestrian movement across the subject roadway.
- (c) If the proposed location is between intersections, the minimum block length is 660 feet. Mid-block crosswalks should not be located where the spacing between adjacent intersections is less than 660 feet per the *Department's Plans Preparation Manual, Vol. 1, Section 8.3.3.2*.
- (d) The proposed location must be outside the influence area of adjacent signalized intersections, including the limits of the auxiliary turn lanes. Where an adjacent intersection is signalized, the ends of standing queues should be observed not to extend to the proposed location.

(5) Safety Considerations

For any proposed mid-block crosswalk, the location should be conducive to providing a minimum level of pedestrian safety. The following conditions should be satisfied for existing crosswalks or, if not, should be achieved in conjunction with any implementation of the proposed marked crosswalk:

- (a) The location for a mid-block crosswalk must provide adequate stopping sight distance. The [*Department's Plans Preparation Manual, Vol. 1, Section 2.7*](#) provides additional information for identifying appropriate stopping sight distance. To provide adequate sight distance, parking restrictions in the vicinity of the marked mid-block crosswalk may be required. Other optional treatments, including curb extensions, may also be considered for improving sight distance and reducing pedestrian crossing distance.
- (b) If sidewalks connecting the crosswalk to established pedestrian generators and attractors are not already present, they should be provided. The [*Department's Plans Preparation Manual, Vol. 1, Section 8.3.1*](#) provides additional sidewalk design considerations.
- (c) Crosswalk illumination shall be provided at all newly constructed mid-block or uncontrolled approach crosswalks. However, there may be locations such as environmentally-sensitive areas or crosswalks serving facilities that are open during daylight hours only, etc, where lighting may be omitted.
- (d) If not already present, a raised median or refuge island is recommended for consideration. Where physical constraints prevent the accommodation of a median refuge, documentation of the roadway and safety conditions shall be required and this information should be taken into consideration in identifying whether the location is appropriate for a mid-block crosswalk. Median refuge areas should meet Americans with Disabilities Act (ADA) requirements that includes maximum slopes, ramp designs, and use of truncated dome detectable warning surfaces (at the ramps and within a median refuge area). Refer to the [*Department's Design Standards, Index No. 304*](#).
 - For volumes greater than 12,000 ADT or where crossing distances exceed 60 feet, a refuge island or raised median should be considered unless controlled by a pedestrian signal or pedestrian hybrid beacon.
- (e) Consideration should be given to the location of nearby bus stops when locating a proposed pedestrian crossing. Bus stops provided on the far side of the mid-block crossing are preferred.

3.8.6 MID-BLOCK PEDESTRIAN CROSSING TREATMENTS

- (1) For all mid-block crosswalks, a 10-foot wide Special Emphasis Crosswalk markings shall be used, as shown in the *Department's Design Standards, Index No. 17346*.
- (2) For many situations, a marked crosswalk alone may not be sufficient. Adding a crosswalk alone will not make crossings safer, nor will they necessarily result in more vehicles stopping for pedestrians. Other facility enhancements should be considered in conjunction with a marked crosswalk such as curb extensions, raised crosswalks, speed reduction treatments, additional signing and marking, flashing beacons, or signalized control. The [Department's Design Standards, Index No. 17346](#) provides three possible configurations of treatments for mid-block crossings. Additional guidance on the application of selected signing, marking, and control treatments is provided through the remainder of this section. Additional treatments, not included in this section, may also be appropriate depending upon the individual site characteristics.
- (3) For locations with sufficiently high pedestrian volume (where signal warrants are met), consideration may be given to providing a pedestrian bridge or tunnel in lieu of an at-grade marked mid-block crossing. For further information, refer to the [AASHTO Guide for the Planning, Design and Operation of Pedestrian Facilities](#).
- (4) Pedestrian Traffic Control Signal
 - (a) When pedestrian volumes are of a sufficient level to meet signal warrants, a pedestrian traffic control signal may be installed to serve this demand. Applicable pedestrian signal warrants and installation guidelines are identified in [Section 4C.05 of the MUTCD](#). Considerations for a pedestrian traffic control signal at a mid-block location should include availability of adequate gaps for pedestrians to cross the roadway. In some cases a pedestrian signal may not be needed at the study location if adjacent coordinated traffic control signals consistently provided gaps of adequate length for pedestrians to cross the roadway. The [Department's MUTS](#) provides additional guidance on conducting Pedestrian Group Size and Vehicle Gap Size studies.
 - (b) For locations where signalized control is selected for the pedestrian crossing, additional coordination for the crossing location is required with the District Access Management Committee and the District Traffic Operations Engineer.
 - (c) For six-lane roadways or crossing distances exceeding 80 feet, a two-stage pedestrian crossing should be considered where the proposed crossing will be controlled by a warranted pedestrian signal. A two-stage

pedestrian crossing may have a lesser impact to vehicle delay (compared to a single crossing) since the signal serves each direction independently while the median serves as a refuge area for pedestrians to wait prior to completing their crossing.

(5) Pedestrian Hybrid Beacon

- (a)** A possible alternative to the pedestrian traffic signal is the “Pedestrian Hybrid Beacon”. [Chapter 4F of the MUTCD](#) provides volume warrants and additional guidance on the use of Pedestrian Hybrid Beacon where pedestrian volumes do not meet the warrants for a pedestrian traffic signal under [Section 4C.05 of the MUTCD](#).

(6) Supplemental Beacons

For locations where full pedestrian traffic signals are not warranted, supplemental beacons may be considered to provide additional emphasis of the cross-walk and the presence of pedestrians. Two options are currently available for use: standard flashing yellow warning beacons and Rectangular Rapid Flashing beacons.

(a) Flashing Yellow Warning Beacons

- The use of flashing yellow warning beacons may provide additional emphasis of the crossing location by supplementing the appropriate mid-block crossing warning or regulatory signs where pedestrian signals are not warranted. When used, beacons shall meet the requirements of [Chapter 4L of the MUTCD](#). Any flashing yellow warning beacons installed at a new crosswalk at an uncontrolled location must use pedestrian actuation, as to elicit a more effective response from motorists than continuously flashing beacons.
- Beacons may be configured either overhead or side mounted; however, the preferred configuration is a side, post-mounting to avoid drivers confusing the beacons for a flashing traffic signal.
 - When post mounted, a configuration of two vertically aligned warning beacons is recommended. These beacons should be operated in an alternating flash pattern.
 - When beacons are overhead mounted, an internally illuminated pedestrian crossing sign should be used in conjunction with the beacons.

(b) Rectangular Rapid Flashing Beacons (RRFB)

- Experimentation in St. Petersburg, Florida and other locations throughout the U.S. have found promising results from the use of RRFBs, used in conjunction with standard pedestrian regulatory and warning signs. FHWA has issued an interim approval of this treatment ([IA-11](#)).
- The rectangular beacons are provided in pairs below the PEDESTRIAN CROSSING warning sign (**W11-2**) and operate in a “wig-wag” pattern upon activation by the pedestrian. When used, the beacons must be pedestrian activated, using approved detectors (such as pushbuttons or passive detection devices) that meet ADA requirements for accessibility. An example of the rectangular rapid flashing beacon treatment is shown in **Figure 3.8.3**. Detailed conditions of use, including sign/beacon assembly, dimensions and placement, and flashing rates are provided in the July 16, 2008 interim approval memorandum ([IA-11](#)) by FHWA.

Figure 3.8.3. Rectangular Rapid Flashing Beacons



(7) In-Roadway Lighting

- (a)** [Section 4N.02 of the MUTCD, In-Roadway Pedestrian Warning Lighted at Crosswalks](#) establishes federal standards by which lighted (illuminated) pedestrian crosswalk edge lines can be installed and operated. Additional guidance and support are provided in [Section 4N.02 of the MUTCD](#) which may be used for the installation and operation of lighted in-roadway pedestrian crosswalks. These additional provisions may be reviewed and considered on a lighted pedestrian walkway.


- (b) In-roadway warning lights shall not be used where YIELD or STOP signs, or traffic signals are present.
- (8) Supplemental Signing and Markings
- (a) To provide additional emphasis of the requirement to stop for pedestrians in the crosswalk, a stop line and associated STOP HERE FOR PEDESTRIANS (**R1-5 series**) sign may be used. This treatment is not to be used in combination with other active treatments such as the Pedestrian Hybrid Beacon.
- If used, the stop line shall be placed 40 ft in advance of the midblock crosswalk. See [Department's Design Standards, Index No. 17346](#). Where a stop line is used, parking should be prohibited in the area between the stop line and the crosswalk.
 - If a stop line is provided, the corresponding STOP HERE FOR PEDESTRIANS (**R1-5 series**) sign shall be provided. The [Department's Design Standards, Index No. 17346](#) illustrates the placement of these signs. [Section 2B.11 of the MUTCD](#) provides additional guidance on the placement of the R1-5 series sign. At locations where the **R1-5 series** sign is used in advance of the crosswalk, the PEDESTRIAN CROSSING warning sign (**W11-2**) shall not be post mounted at the crosswalk location; however the W11-2 sign may be mounted overhead at the crosswalk location.
 - An ADVANCE PEDESTRIAN CROSSING warning sign (**W11-2**) with supplemental AHEAD plaque shall be used in combination with the **R1-5 series** sign. The [Department's Design Standards, Index No. 17346](#) shall be used for mounting locations of advance **W11-2** signs as related to approach speeds.
- (b) IN-STREET PEDESTRIAN CROSSING sign (**R1-6 or R1-6a**) may be used on low speed roadways to remind road users of laws regarding right-of-way at an unsignalized pedestrian crosswalk. An IN-STREET PEDESTRIAN CROSSING sign should not be placed in advance of a crosswalk to educate road users about the State law prior to reaching the crosswalk, nor should it be installed as an educational display along the highway that is not near any crosswalk. Additional information is provided in [Section 2B.12 of the MUTCD](#).
- If used, the IN-STREET PEDESTRIAN CROSSING signs shall be placed in the roadway at the crosswalk location on the center line, on a lane line, or on a median island. The IN-STREET PEDESTRIAN CROSSING sign shall not be post-mounted on the left-hand or right-hand side of the roadway.

3.8.7 SELECTION GUIDANCE FOR PEDESTRIAN TREATMENTS

- (1) The treatment to be provided at a particular location should be selected in consideration of pedestrian volumes and crossing difficulty:
 - (a) For a high volume of crossing pedestrians, signal control is usually appropriate, provided an **MUTCD** signal warrant is satisfied.
 - (b) For locations that meet the criteria for identified need under **Section 3.8.5**, but do not have sufficient pedestrian volume to meet **MUTCD** signal warrants, decisions about which additional treatment elements to include (if any) should be made with sound engineering judgment.
- (2) The charts shown in **Figure 3.8.4** and **Figure 3.8.5** of this section were developed using MUTCD Table for **Figure 4C-7**, Tables for **Figure 4F-1** and **Figure 4F-2** respectively. The charts herein are intended for use as a quick-check guidance for selecting the appropriate pedestrian traffic control device for a particular set of hourly vehicular and pedestrian volumes for low and high-speed roadways.


Figure 3.8.4

Guidelines for the Installation of Pedestrian Treatments on Low-Speed Roadways
 Speeds of 35 mph or less

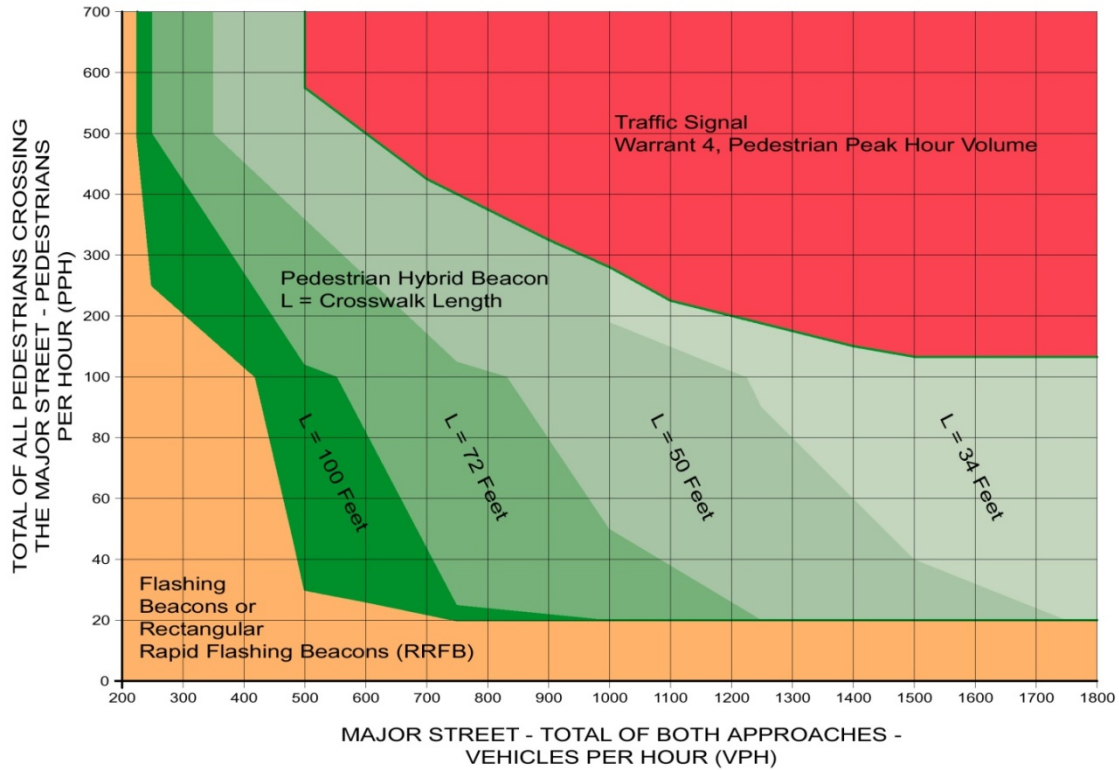

- LEGEND**
- MUTCD Traffic Signal Warrant 4 Chart
 Note: 133 PPH applies as the lower threshold volume
 - MUTCD Guidelines for the Installation of Pedestrian Hybrid Beacons on Low-Speed Roadways Chart
 Note: 20 PPH applies as the lower threshold volume
 - Guideline for the Installation of Flashing Beacons or Rectangular Rapid Flashing Beacons on Low-Speed Roadways Chart

Figure 3.8.5
Guidelines for the Installation of Pedestrian
Treatments on High-Speed Roadways
 Speeds greater than 35 mph

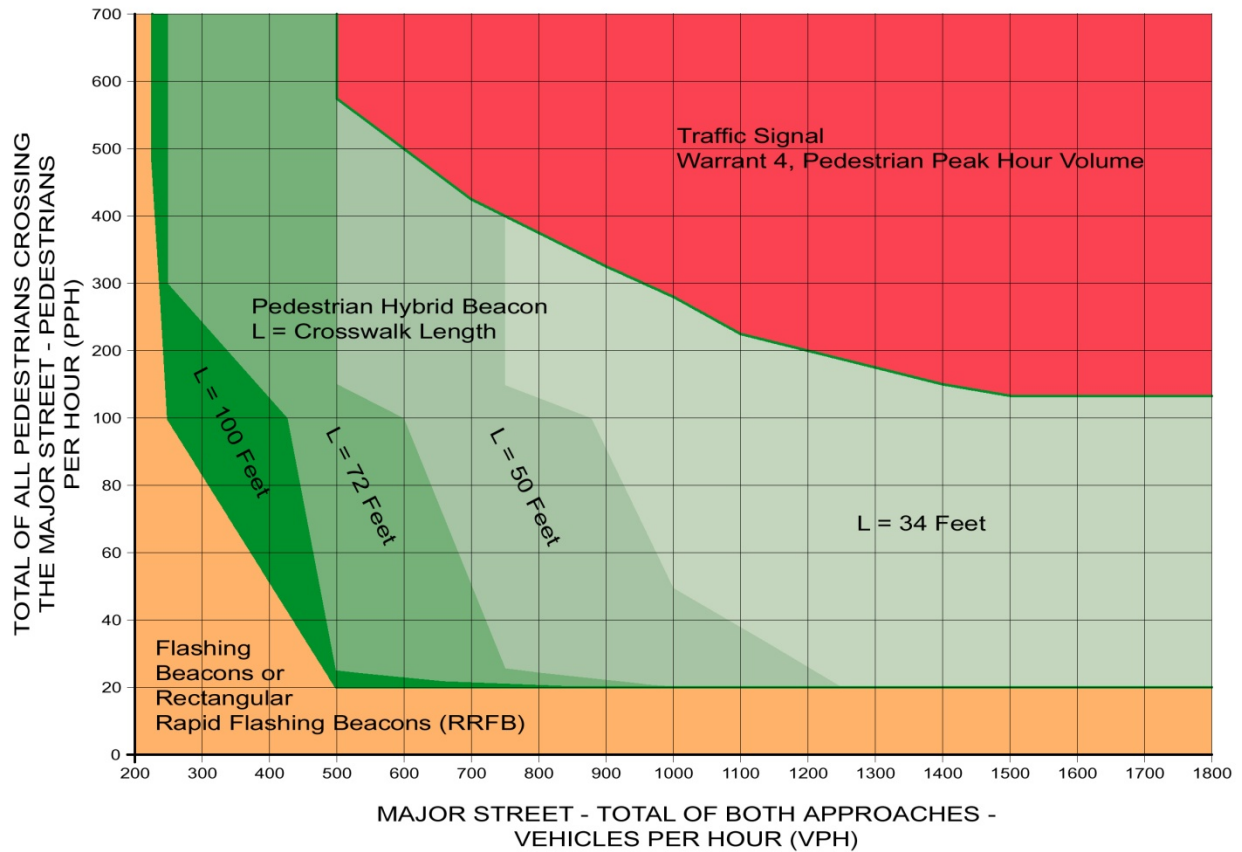

- LEGEND**
- MUTCD Traffic Signal Warrant 4 Chart
 Note: 133 PPH applies as the lower threshold volume
 - MUTCD Guidelines for the Installation of Pedestrian Hybrid Beacons on High-Speed Roadways Chart
 Note: 20 PPH applies as the lower threshold volume
 - Guideline for the Installation of Flashing Beacons or Rectangular Rapid Flashing Beacons on High-Speed Roadways Chart

Section 3.9

COUNTDOWN PEDESTRIAN SIGNAL APPLICATIONS

3.9.1 PURPOSE

To establish criteria for the installation and operation of countdown pedestrian signals. Also to establish priority selection criteria for existing locations that currently do not have countdown pedestrian signals on the State Highway System.

3.9.2 GENERAL

The application of a countdown pedestrian signal is to enhance the safety of the pedestrian crossing a street during the pedestrian phase of the signal cycle. The countdown feature provides additional information to the pedestrian regarding the remaining clearance time available to cross the roadway before the pedestrian phase terminates. The countdown indication is integral to the standard pedestrian signal assembly and provides a sequential countdown in seconds from the start of the flashing "Don't Walk" indication until the steady "Don't Walk" indication is displayed.

3.9.3 INSTALLATION CRITERIA

- (1) Countdown pedestrian signals are the Department's standard type of pedestrian signal, as stated in the [Department's Pedestrian Countdown Signal Application Policy \(Topic No. 000-750-010\)](#).
- (2) Countdown pedestrian signals shall be installed on all new construction and rebuilt traffic signal installations where pedestrian signals are included. Districts may install, depending on construction costs, countdown pedestrian signals on resurfacing projects.
- (3) When funding exists and districts or local governments want to replace existing pedestrian features with countdown pedestrian signals the following criteria should be used to assist them in determining the priority order of locations:
 - (a) Pedestrian crash history
 - (b) High percentage of older pedestrians
 - (c) High percentage of tourist pedestrians
 - (d) High percentage of school-age children
 - (e) High speed roadway
 - (f) Multi-lane and/or wide intersection
 - (g) High percentage of disabled pedestrians
 - (h) High volume of pedestrians

- (4) Only Department certified countdown signals shall be installed. A list of the approved devices can be found on the [Department's Approved Product List](#).
- (5) The countdown pedestrian signal may be installed at mid-block crossings where a standard pedestrian signal has been installed.

3.9.4 INSTALLATION/REMOVAL PROCESS

- (1) A maintaining agency may request retrofit of a non-countdown pedestrian signal to a countdown pedestrian signal through the District Traffic Operations Engineer. Any other requesting agency shall coordinate through the local maintaining agency before seeking approval of the Department.
- (2) If any safety and/or operational concerns arise following the installation of a countdown pedestrian signal, the Department has the authority to remove the device. Any public entity and/or maintaining agency may request the removal of the device, and if removal is determined to be necessary due to safety and/or operational issues, the District Traffic Operations Engineer shall notify the local maintaining agency of the removal or approve removal of the device by the maintaining agency.

Chapter 4

MARKINGS

Section 4.1

CROSSWALKS IN HEAVY PEDESTRIAN CONCENTRATION AREAS

4.1.1 GENERAL

Heavy pedestrian generators such as beaches or hotels may create a need for channeling pedestrians across a State Highway at locations other than intersections.

To help ensure the use of marked crosswalks in heavy pedestrian concentration areas, special consideration should be given to their location relative to construction or proximity of sidewalks, paths, guardrails, retaining walls, or shrubbery as a means for controlling existing pedestrian crossing movements within a defined path.

4.1.2 MARKINGS

- (1) A marked crosswalk shall consist of 2 parallel white lines 1-foot wide. Lines should be placed not less than 6 feet apart and located to provide the least amount of walk time, whenever practical (see the [Department's Design Standards, Index Nos. 304 and 17346](#)).
- (2) For added visibility, special emphasis markings may be used as shown in the [Department's Design Standards, Index No. 17346](#).

4.1.3 SIGNING

- (1) A PEDESTRIAN CROSSING (**W11-2**) sign, along with an arrow panel (**W16-7p**) shall be installed immediately adjacent to each marked pedestrian crossing location. This installation can be either ground-mounted or overhead on the mast arm or span wire.
- (2) A PEDESTRIAN CROSSING (**W11-2**) sign along with an AHEAD (**W16-9P**) supplemental panel shall be installed in advance of a series of marked crosswalks and may be installed in advance of each crosswalk location within a heavy pedestrian concentration area.
- (3) The need for advance crossing signs shall be based on engineering judgment considering relative spacing of crosswalks, roadside development, and other factors. The [Department's Design Standards, Index No. 17346](#) shall be used for mounting locations as related to approach speeds.

- (4) An END PEDESTRIAN CROSSING sign may be installed to notify motorists that the pedestrian zone has ended. The sign should be 3 x 8 feet with 8-inch letters if mounted overhead. The size of a ground-mounted sign shall be 24 x 30 inches. Sign format shall be similar to that used for the END SCHOOL ZONE (**FTP-32-04 or FTP-34-04**) sign as shown in the [*Department's Design Standards, Index No. 17344*](#). The sign should be installed approximately 200 to 300 feet beyond the last marked crosswalk.

Section 4.2

PAVEMENT WORD, SYMBOL, AND ARROW MARKINGS

4.2.1 GENERAL

- (1) Pavement word, symbol, and arrows markings (**Figures 4.2-1 through 4.2-4**) may be used to supplement existing highway signing and/or to provide additional emphasis for regulatory, warning, or guidance messages as determined by engineering judgment.

Figure 4.2-1. Pavement Word Markings



- (2) The minimum requirements for word, symbol, and arrow markings are provided in [Section 3B.20 of the MUTCD](#). Additional requirements are provided in the [FDOT Design Standards, Index No. 17344, Index No. 17346](#) and [Index No. 17347](#). Design of elongated shields are contained in the [Pavement Markings Section in the MUTCD Standard Highway Signs and Markings Book \(2004\)](#).
- (3) Pavement word, symbol, and arrow markings shall not be used as a substitute for vertical sign installation unless overhead signing is impractical or impossible to install, such as imposing on navigable airspace.
- (4) To recommend non-standard word or symbol pavement markings, an engineering study indicating how the application can be expected to optimize operations efficiency and/or safety is required to be forwarded through the District Traffic Operations Engineer to the State Traffic Operations Engineer in support of a FHWA Request for Experiment. If the request is accepted and approved by the FHWA, the District Traffic Operations office recommending the design will be responsible for submission of the required interim and final reports to Central Office for review and submission to the FHWA.

Figure 4.2-2. Pavement Symbol and Arrow Markings



4.2.2 LANE USE ARROW AND “ONLY” PAVEMENT MARKINGS ON INTERSECTION APPROACHES

- (1) Lane-use arrow symbols should not be routinely applied in through lanes at intersections except with overhead lane-use control signs. However, where unusual geometrics or alignment of through lanes may result in driver confusion, a straight arrow symbol may be used to provide additional guidance for drivers in the through lanes.
- (2) The word “ONLY” is not required if the arrow symbol for an exclusive turn lane is used under the following conditions:
 - (a) Lane is developed at a mid-block location.
 - (b) Lane is clearly delineated by appropriate channelization.
 - (c) Lane requires lateral vehicle movement from an established lane for proper positioning to execute the turn.
- (3) However, the word “ONLY” shall be used with the arrow symbol where unusual geometrics or alignment of an exclusive turn lane may result in driver confusion or misunderstanding.
- (4) Where an established through lane becomes an exclusive turn lane, the word “ONLY” shall be used with the arrow symbol indicating the allowed turning movement.

- (5) Whenever the word “ONLY” is used with an arrow symbol, these markings shall be accompanied by the appropriate signs as specified in [Sections 2B-18, 2B-19 2B-20 and 3B-20 of the MUTCD](#).
- (6) Design and placement details for pavement arrows and the ONLY message are found in the [FDOT Design Standards, Index No. 17346](#).

4.2.3 ROUTE SHIELD PAVEMENT MARKINGS

- (1) Route Shield Pavement Markings (**Figure 4.2-3**) shall be justified for use due to cost. Public feedback about a specific location should be considered. Route shield pavement markings are justified for each of the following conditions:
 - (a) Increased crash history where high traffic volumes worsen complex lane assignments such as lane drops, double lane exits with optional lanes, gores where crash cushions are hit frequently, and unusual geometries.
 - (b) Underutilization of the optional lane or excess lane where changing maneuvers could cause congestion in an area not expected from volume/capacity analyses.
 - (c) Complicated lane assignments and alignment shifts.
 - (d) Where an overhead sign structure is not practical and the turn-lane from an arterial to the on-ramp of a limited access facility may appear to provide access to establishments in the vicinity.

Figure 4.2-3. Route Shield Pavement Markings



-
- (2)** Route shield pavement markings are to be installed for optimum visibility.
- (a)** Place after at least one overhead guide sign for interchange.
 - (b)** Place far enough upstream of the decision point to allow motorist to safely change lanes.
 - (c)** Do not install under or immediately adjacent to overpasses as they can cast shadows on the shields. Note that placement on downhill slopes may reduce their effectiveness.
 - (d)** Place no more than two sets of markings (shield, with arrow or message) before the gore or decision point.
 - (e)** Install them within 1 mile in advance, taking into consideration existing signs and other traffic control devices.
- (3)** Route shield pavement markings shall be installed as follows:
- (a)** All Route shields shall be pre-formed thermoplastic.
 - (b)** All Route shield pavement markings shall be 15 feet in length.
 - (c)** US Route shields shall have contrast for both asphalt and concrete pavement.
 - (d)** Align the symbol in the center of the lane.
 - (e)** Install the route shields in a single line across the roadway. Do not stagger.
 - (f)** Arrows or messages (TO, LEFT, RIGHT, NORTH, SOUTH), may be used to supplement route shields and shall follow the route shield.
 - (g)** Use an 80 foot gap between markings. However, cardinal directions (if used) may be 40 foot from a route shield marking.

Figure 4.2-4. Cardinal Direction Markings



4.2.4 ROUTE SHIELDS FOR WRONG WAY TREATMENT

- (1) Route Shield Pavement Markings provide proper guidance to motorists on arterials adjoining limited access facilities. **Figures 4.2-5** and **4.2-6** show the plan view of the E Bearss Avenue interchange with Interstate-275 in Tampa. **Figure 4.2-6** shows the left turn arrow marking in the westbound dual left turn lanes east of the off-ramp intersection. These figures illustrate the possible existing typical treatments and, if present, will need modifications as noted in this section. Such treatments shall not be used on future projects.

Figure 4.2-5. Plan View of an I-275 Interchange

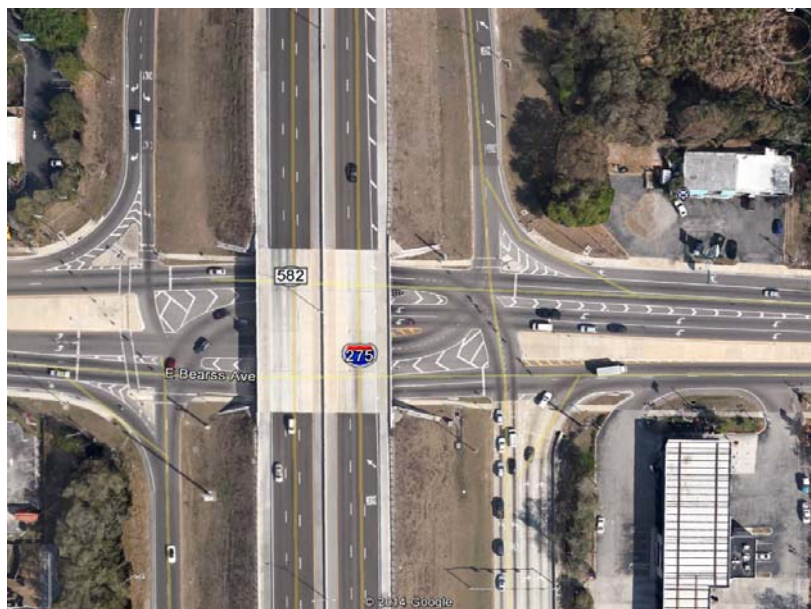


Figure 4.2-6. Dual Left Turn Lanes with Left Turn Arrows



- (2) At interchanges with a break in the arterial left turn lane(s) serving a ramp, the pavement markings preceding the break shall include the interstate shield, cardinal direction, and straight arrow. An example is shown in **Figure 4.2-7**.

Figure 4.2-7. Pavement Markings for Wrong Way Treatment



- (3) There shall be one combination of the interstate shield, cardinal direction and straight arrow per lane and preceding the break in the turn lane which then serves the entry ramp.
- (4) The lane designation at all newly designed interchanges shall follow this scheme.

Section 4.3

USE OF BLUE RAISED PAVEMENT MARKERS TO IDENTIFY FIRE HYDRANTS

4.3.1 PURPOSE

To provide instruction for uniform application of blue raised pavement markers (RPMs) as aids in locating fire hydrants on the State Highway System.

4.3.2 BACKGROUND

Rapid location of fire hydrants can be hindered by shrubbery or parked vehicles blocking the view from fire apparatus on the traveled way. Accordingly, local fire agencies have been installing blue RPMs on the pavement surface to more readily locate hydrants. These markers are not traffic control devices but are a significant aid to public safety. Uniformity in application is essential for locating purposes and to ensure they do not distract from official traffic control devices.


4.3.3 PROCEDURE

- (1) Blue RPMs may be used on the State Highway System but solely for aiding in locating fire hydrants.
- (2) Local governmental agencies desiring to install blue RPMs on the State Highway System should obtain approval from the [**District Traffic Operations Engineer**](#) prior to installation. Such approval shall not be unreasonably withheld.
- (3) Installation and maintenance of blue RPMs, including replacement on resurfacing projects, shall be the sole responsibility of the local governmental agency seeking approval for installation.
- (4) Generally, blue RPMs shall be installed by the local governmental agency on the pavement directly across from the fire hydrant in accordance with the guidelines listed herein.
- (5) The [**District Traffic Operations Engineer**](#) may authorize exceptions, in writing, where unusual circumstances or conditions may exist.


4.3.4 GUIDELINES

- (1) **Two-Way Streets or Roads.** Markers should be placed 6 inches from edge of painted centerline on the side nearest the fire hydrant. If the street has no centerline, the marker should be placed 6 inches from the approximate center of the roadway on the side nearest the hydrant. See **Figures 4.3-1, 4.3-2, and 4.3-3.**
- (2) **Streets with Left Turn Lane at Intersection.** Markers should be placed 6 inches from edge of painted white channelizing line on the side nearest the hydrant. See **Figure 4.3-4.**
- (3) **Streets with Continuous Two-Way Turn Lane.** Markers should be placed 6 inches from the edge of the painted yellow barrier line on the side nearest the fire hydrant. See **Figure 4.3-5.**
- (4) **Freeways and Expressways.** Because of higher maintenance at these locations if placed on the roadway, markers should be placed on shoulder 12 inches to the right of the painted edge line opposite the off right-of-way fire hydrant location. It is recommended that due to high speed environment, the markers are placed in a cluster of four. We also recommend the use of hydrant location signs to be placed on fence or more importantly, on sound walls. See **Figure 4.3-6.**

**Figure 4.3-1
TWO-LANE STREET**

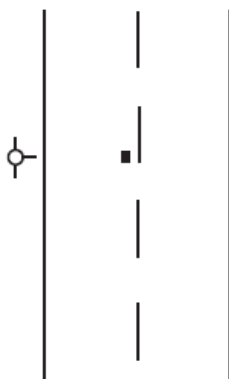

**Figure 4.3-2
MULTI-LANE STREET**

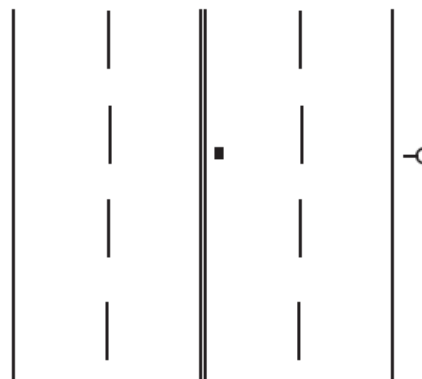

Section 4.4

ROUNABOUT MARKINGS

The Department's standards for this section are shown in **Chapter 3C of the MUTCD** and can be accessed at the following link:

<http://mutcd.fhwa.dot.gov/htm/2009/part3/part3c.htm>

Chapter 5

SPECIALIZED OPERATIONAL TOPICS

Section 5.1

GOLF CART CROSSING AND OPERATION ON THE STATE HIGHWAY SYSTEM

5.1.1 PURPOSE

The purpose of this section is to establish criteria and guidelines for safe operation of golf carts on authorized portions of the State Highway System.

5.1.2 GENERAL

- (1) The Department has developed this section in response to a growing public interest in using golf carts. Golf carts are increasingly used to make short trips for shopping, social and recreational purposes from nearby residential neighborhoods such as planned unit communities with golf courses. These passenger-carrying vehicles, although low-speed, offer a variety of advantages, including comparatively low-cost and energy-efficient mobility.
- (2) Golf cart use and operation on public roads is authorized only under certain circumstances as provided in [Section 316.212, F.S.](#) The intent of this section is to provide criteria and guidelines for authorizing golf cart crossings at designated locations along State Highway System and promote uniformity within the State. This section also provides safety recommendations to counties and municipalities wishing to enact ordinances authorizing the use of golf carts on sidewalks adjacent to or on the State Highway System within their corresponding jurisdictions.

5.1.3 DEFINITIONS


- (1) **Golf Cart:** A motor vehicle designed and manufactured for operation on a golf course for sporting or recreational purposes and that attain speeds of less than 20 miles per hour.
- (2) **Grade Separated Crossing:** A tunnel or overpass designed and constructed for the purpose of crossing a street or highway.
- (3) **Local Government:** A City or County as defined in [Section 11.45 \(e\), F.S.](#)
- (4) **State Roadway:** Any roadway of the State Highway System under jurisdiction of the State except limited access facilities.

5.1.4 PROCEDURE

- (1) Any golf cart crossing proposed for a location on the State Highway System shall be reviewed and approved by the appropriate District Traffic Operations Engineer prior to installation. The Department's preferred design for golf cart crossing of any state road shall be via grade separated facility.
- (2) A request from a local government shall be submitted to the appropriate District Traffic Operations Engineer. Non governmental entities wishing to obtain authorization for a golf cart crossings shall do so through the local government with jurisdictional authority.
- (3) If the District Traffic Operations Engineer's review of available information supports the installation of a golf cart crossing based upon the criteria outlined in **Section 5.1.5**, then a full engineering study prepared by a State of Florida licensed engineer representing the requester may be conducted.
- (4) The criteria referenced in **Section 5.1.5**, as documented in an engineering study, shall be met as a condition for approval of a golf cart crossing. The engineering study shall also contain the following information:
 - (a) Document the need for a golf cart crossing based on conditions set forth in [Section 316.212, F.S.](#) , i.e., verify the following:
 - The intersecting county or municipal road has been designated for use by golf carts.
 - A golf course or single mobile home park is constructed on both sides of a state road.
 - (b) Document all safety considerations with respect to intersecting sight distances, proximity to intersection and driveway conflict areas, number and configuration of approach lanes to signalized intersections and roadway speed and volume thresholds as described in **Section 5.1.5** that can be satisfied at the proposed location.
 - (c) Document the proposed golf cart crossing and/or roadway segment location (Roadway ID and Mile Post) and corresponding signing, marking, and signal treatments (if applicable). A schematic layout should be provided over aerial photography or survey to show locations of signs, markings, and other treatments in proximity to existing traffic control devices.
 - (d) Document all crash history within the vicinity of the proposed golf cart crossing based upon a minimum three years of data.

-
- (5) If the evaluation results in a decision not to authorize the installation of a golf cart crossing, the District Traffic Operations Engineer shall document the reasons and advise the local government of the findings. *Meeting the minimum criteria outlined in this section does not guarantee approval of a request for a golf cart crossing.*
 - (6) Prior to the approval of a golf cart crossing, coordination is necessary between the appropriate District Traffic Operations Office, District Maintenance Office and local governments to determine any permitting requirements or responsibilities for maintenance.


Procedure Flowchart

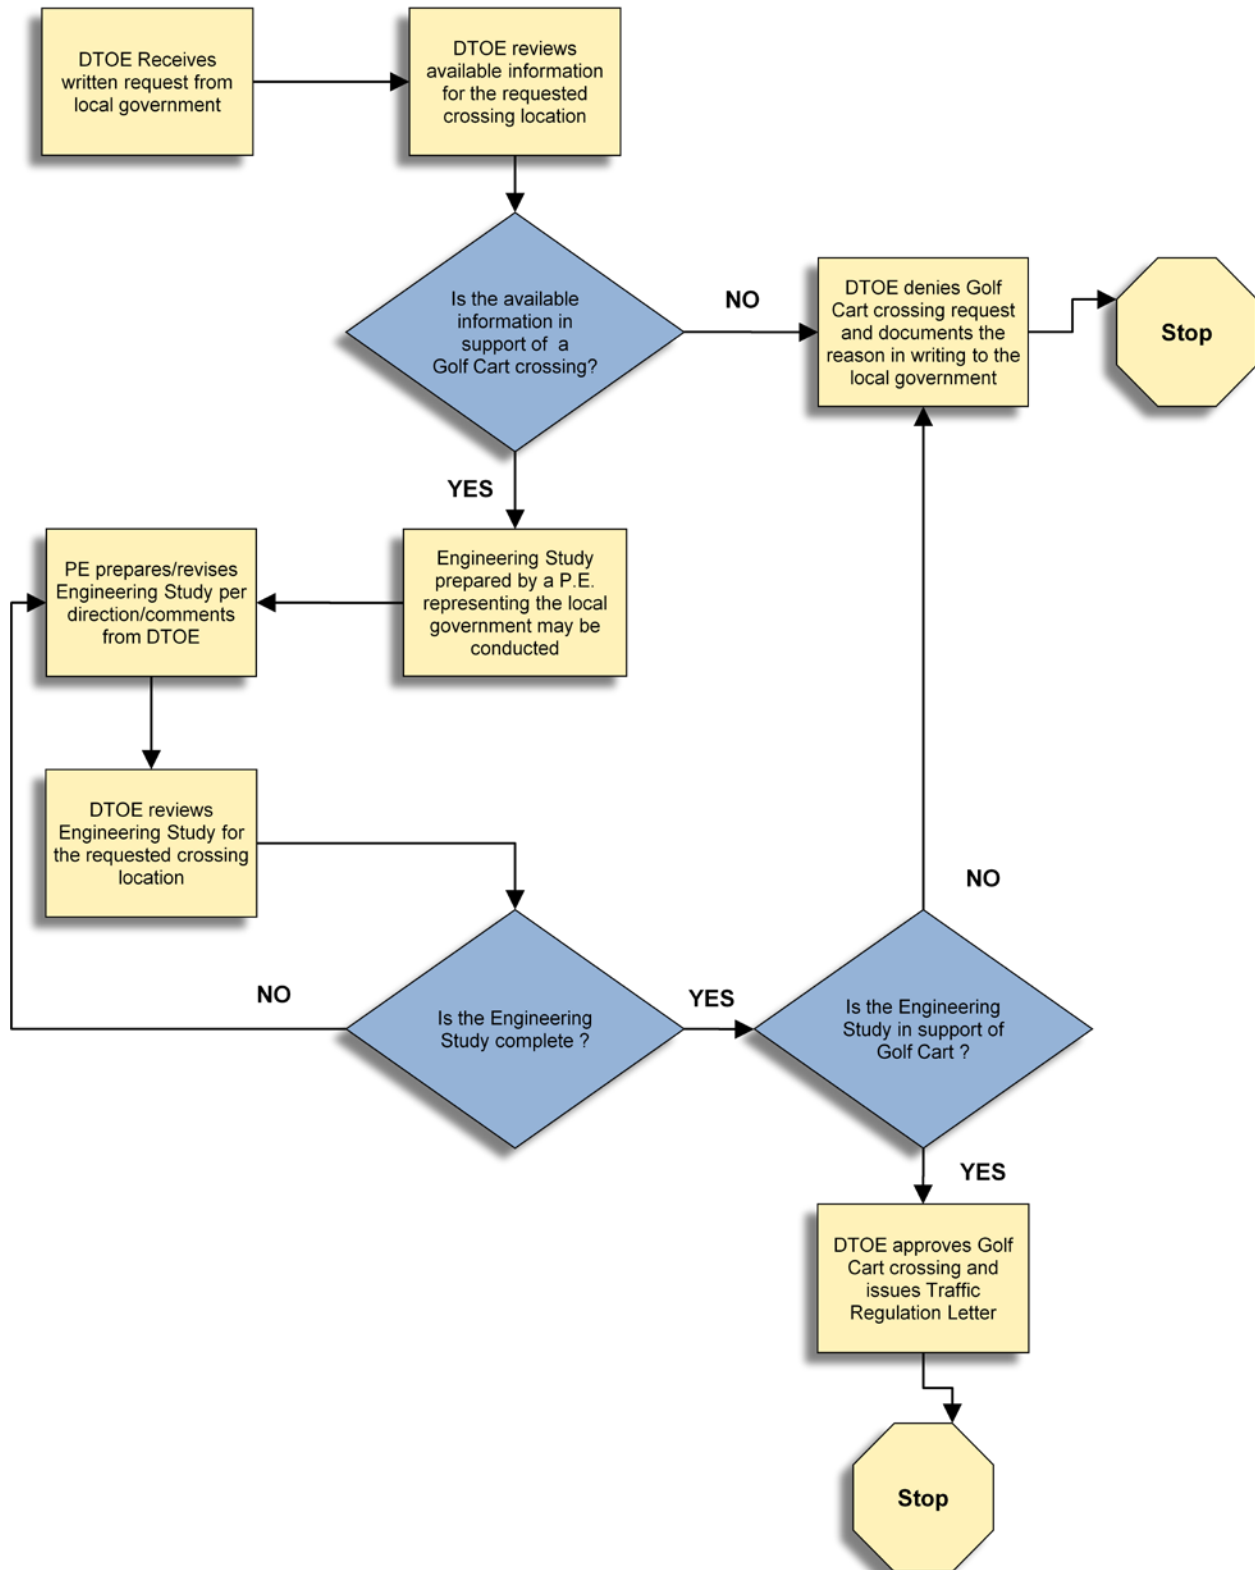

5.1.5 CRITERIA FOR APPROVAL OF CROSSING

- (1) **Mid-Block Crossing:** To be considered for a golf cart crossing at a mid-block location along any state road where a golf course or a single mobile home park is constructed or located on both sides of the roadway, the proposed location and roadway characteristics shall meet the following criteria:
- (a) Maximum vehicular volume of 15,000 Average Daily Traffic (ADT) or less along the roadway segment.
 - (b) Maximum Posted Speed Limit of 40 miles per hour or less.
 - (c) Maximum number of lanes is three (3) with or without bike lanes.
 - (d) Maximum allowable median width is 15 feet or less.
 - (e) Minimum distance to the nearest driveway, access point or pedestrian crosswalk is 350 feet in each direction.
 - (f) Crossing along roadway tangents only with the nearest point of curvature at least 350 feet in each direction.
 - (g) A clear and unobstructed view of the roadside on the approach to the crossing.
 - (h) Mid-block crossing signing and pavement markings should be installed as shown in **Figure 5.1-1**.
 - (i) Golf carts are the only vehicle permitted to use the designated crossing or to traverse State right-of-way. Other vehicles such as Low Speed Vehicles are strictly prohibited. See [320.01\(42\) F.S.](#)

Figure 5.1-1. Mid-Block Crossing

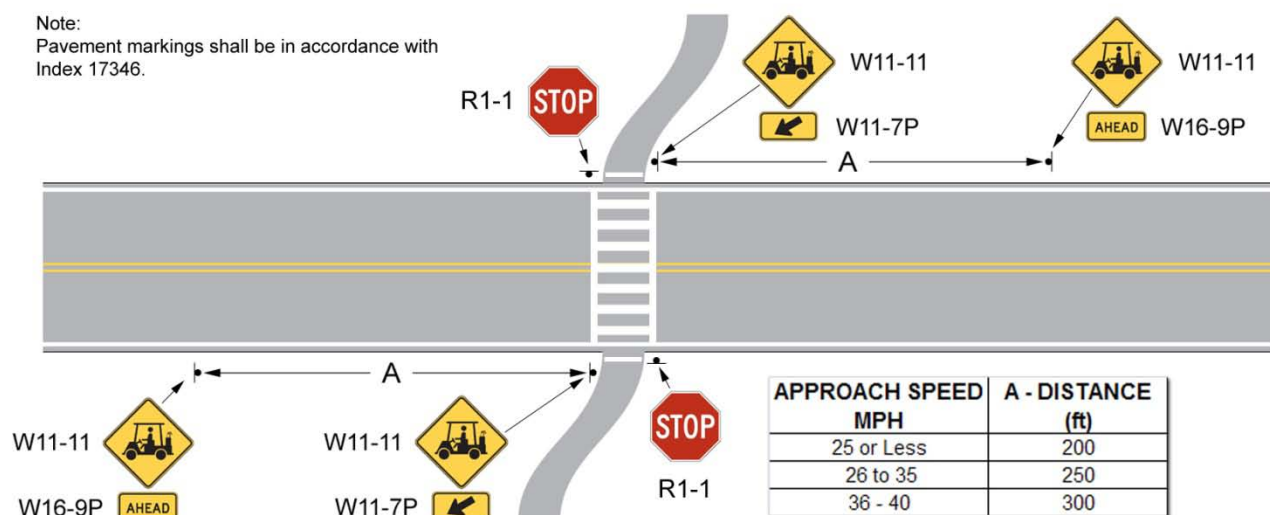

- (2) **Side Street Stop Controlled Intersections:** To be considered for a golf cart crossing at a roadway intersection with side street stop control, the location along any state road shall meet the following criteria:
- (a) Side street maximum vehicular volume 1,200 ADT and AM/PM Peak Hour not to exceed 110 vehicles per hour single direction.
 - (b) Main street posted speed limit or 85th percentile intersection approach speed is 35 miles per hour or less.
 - (c) Maximum crossing distance for undivided roadways shall be equal to three (3) lanes or less not including any right turn lanes, bike lanes and crosswalks. For divided roadways of four (4) lanes or less, a minimum of twenty two (22) feet median width is required. See **Figure 5.1-3**.
 - (d) Side street approaches should have an exclusive left turn lane and a shared through-right turn lane. Other lane approach configurations will be considered on case-by-case basis.
 - (e) Side street intersection alignment shall be a 90 degrees (not more than 105 degrees) angle to the mainline tangent. Skewed or offset intersections are not recommended for golf cart crossings.
 - (f) Approach stop signs and pavement markings shall be in accordance with [MUTCD](#) and [Department's Design Standards, Index No.17346](#).
 - (g) Golf Cart signs (**W11-11**) should be placed on the mainline approach as shown in **Figure 5.1-2** and **Figure 5.1-3**.

Figure 5.1-2. Stop-Controlled Crossing


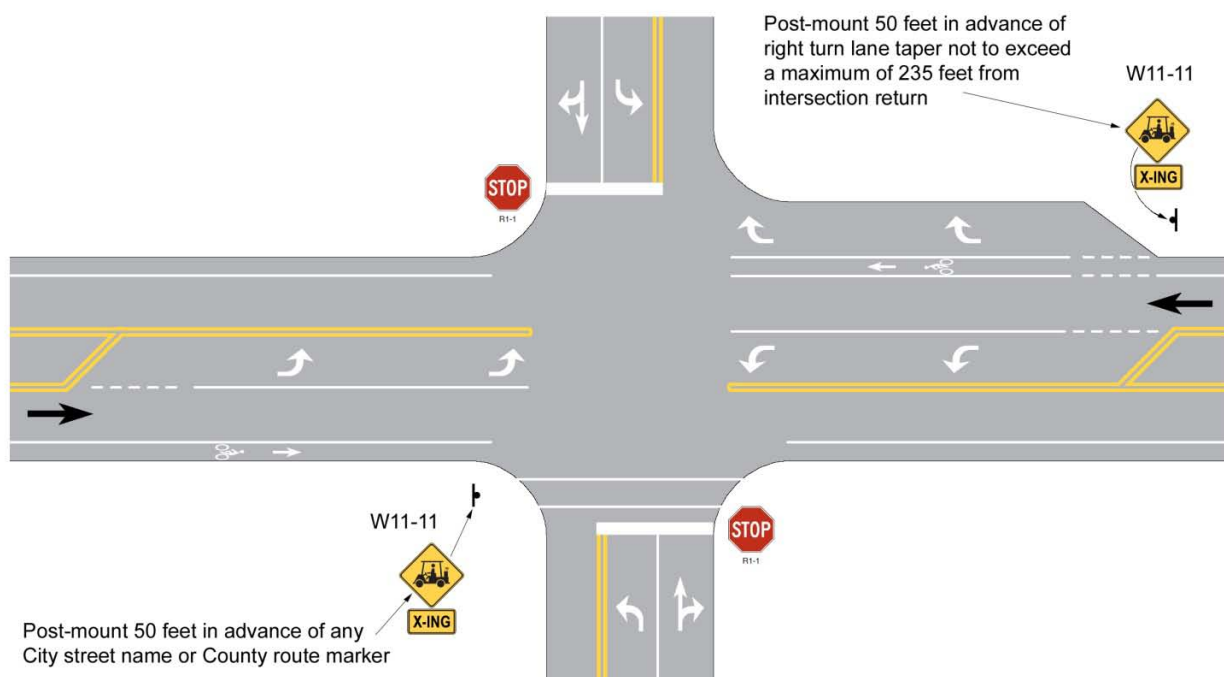



Figure 5.1-3. 4-Lane Stop-Controlled Crossing

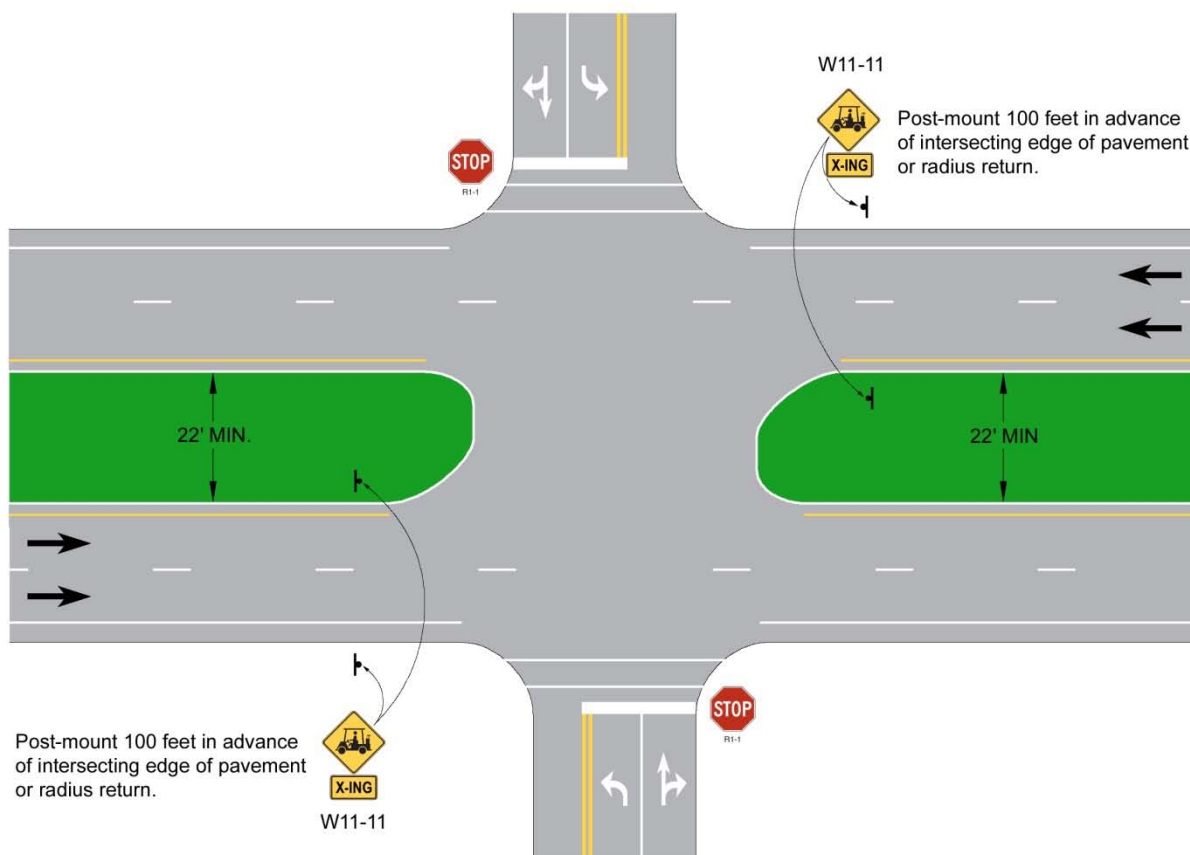

- (3) **Full Signalized Intersections:** To be considered for a golf cart crossing at a roadway intersection with full signal control, the location along any state road shall meet the following criteria:
- (a) Side street maximum vehicular volume 1,500 ADT and AM/PM Peak Hour not to exceed 200 vehicles per hour single direction.
 - (b) Side street posted speed limit or 85th percentile intersection approach speed is 35 miles per hour or less.
 - (c) Maximum crossing distance equal to five (5) lanes or less not including any right turn lanes, bike lanes and crosswalks.
 - (d) Side street approaches should have at least one (1) exclusive left turn lane and at least one (1) exclusive through or shared through-right turn lane. Other lane approach configurations will be considered on case-by-case basis.
 - (e) Side street intersection alignment shall be a 90 degrees (not more than 105 degrees) angle to the mainline tangent. Skewed or offset intersections are not recommended for golf cart crossings.

- (f) Golf carts shall not use pedestrian crosswalks or sidewalk ramps for the purpose of crossing the mainline state road.
- (g) Golf cart crossings are not permitted at “T” intersections.
- (h) For existing signalized “T” intersections, a proposed forth leg approach and receiving lane for the exclusive use of golf cart crossing shall not be permitted.
- (i) Approach traffic control signs and pavement markings shall be in accordance to [MUTCD](#) and [Department’s Design Standards, Index No. 17346](#).
- (j) Golf Cart signs (*W11-11*) should be placed on the side street approach as shown in [Figure 5.1-4](#).

Figure 5.1-4. Traffic Signal Controlled Crossing

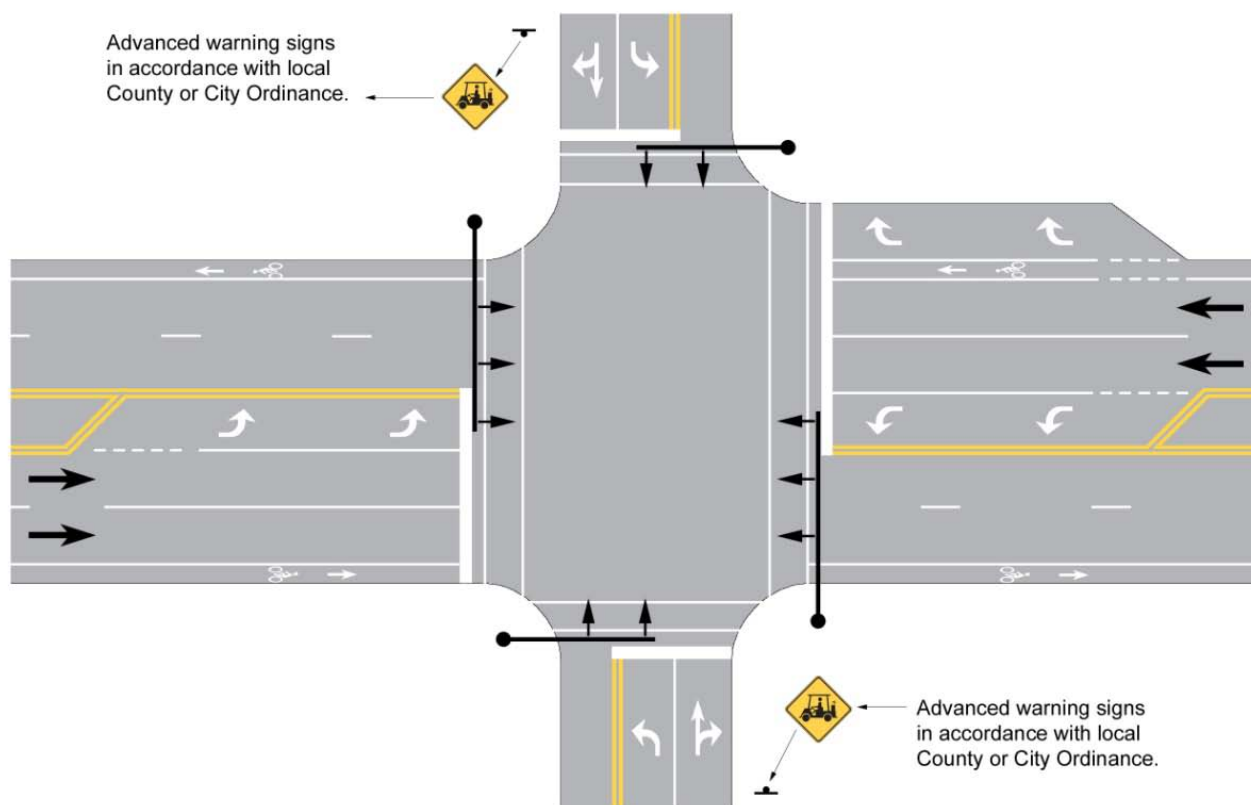


5.1.6 OPERATION OF GOLF CARTS ON SIDEWALKS

- (1) Under [Title 23 of United States Code, Section 217](#), existing and proposed non-motorized trails and pedestrian walkways using Federal transportation funds do not permit motorized use including golf cars or golf carts. However, the legislation authorizes exceptions and the Federal Highway Administration (FHWA) has developed framework for an exception process.

- (2) **Safety and Operational Recommendations:** The following recommendations for the operation of golf carts on pedestrian sidewalks adjacent to a state road should be considered when authorizing such use by local government ordinance:
- (a) Access to State maintained sidewalks should be from county or city maintained sidewalks adjacent to side streets intersecting with a state road. In-street golf cart operation onto State operated sidewalks via ADA curb ramps is not permitted.
 - (b) Crossing a state road from county or city maintained streets or sidewalks to access State operated adjacent sidewalks is not recommended. If a local government submits a request for golf cart crossing and seeks consultation for golf cart operation on a State operated sidewalk at the same location, the golf cart crossing will not be allowed.
 - (c) A minimum un-obstructed sidewalk width of 8 feet is required and separated from back of curb or edge of shoulder by at least 5 feet is recommended.
 - (d) A minimum width of 4 foot grassed or stabilized, relatively flat area should be provided beyond the outside edge of sidewalks for recovery or stalled golf carts. Sidewalks with existing adjacent drainage features or fencing should not be considered.
 - (e) Golf cart operation on State operated sidewalks should terminate at a connecting county or city maintained sidewalk.
 - (f) State approved, Golf Cart On Sidewalk signs should be installed along State operated sidewalks as shown in **Figure 5.1-4**.

Figure 5.1-4. Golf Cart Operation on Sidewalks

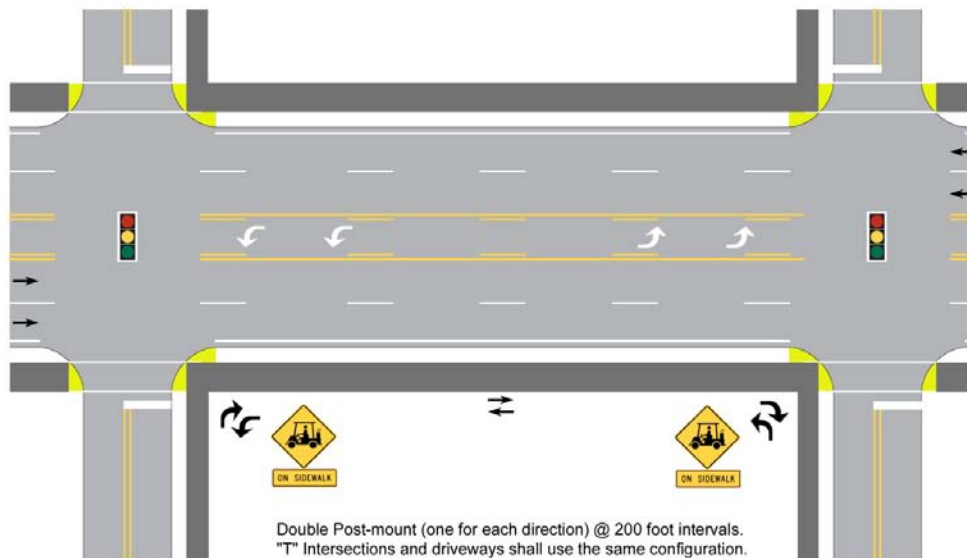

Chapter 6

SAFE MOBILITY FOR LIFE PROGRAM

Chapter 7

TECHNOLOGY

Section 7.1

APPROVED PRODUCT LIST CERTIFICATION AND APPROVAL PROCESS

This section has been rescinded and the information is now contained in [Local Procedure No. 2012-05-02, Certification and Approval of Traffic Control Signals and Devices.](#)

HISTORY

Chapter 1	Traffic Engineering Manual Adoption Procedure
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
10/11	Added Section 5 (Traffic Engineering Variations) and Section 6 (Traffic Engineering Variation Process)
03/09	Pen and ink changes.
12/06	Pen and Ink changes.
04/05	Changed office name. Removed rule reference for Section 2.16.
08/03	Changed website address.
03/03	Changed rule incorporation reference to 14-15.015. Updated website address.
03/02	Changed website address. Also created links to references and changed office name to Traffic Operations.
10/01	Approved to have TEM available electronically on the internet/infonet only.
Section 2.1	Use of Slippery When Wet Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
03/02	Updated references to Millennium MUTCD and included links to all references.
10/99	Section 2.1.2(3), 2 nd paragraph. Added, "These signs should be placed in accordance with MUTCD Table II-1 using a 10 mph deceleration factor."
06/91	Former FDOT Topic Number 750-010-018 incorporated into TEM.
Section 2.2	Overhead Street Name Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
06/09	Clarified sign design requirements for internally illuminated overhead signs vs. standard static panel signs.
04/07	Removed references to Advance Street Name Signs (new Section 2.37). Standardized sign sizes for overhead street name signs on State Highway System.
03/02	Updated references to Millennium MUTCD and included links to all references.
05/00	Section 2.2.4(1) and (2) changed to conform with our letter height requirements shown in Table 6.3-1 in the Elder Roadway User Program Section of the TEM.
Section 2.3	Signs and Markings at Non-Signalized Intersections of Divided Highways and Crossroads
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.

- 12/06 Pen and Ink changes (updated references and/or links).
- 03/02 All references in this document are now in the 2002 edition of the Design Standards.
- 07/00 This section updated to include the mandatory implementation plan for Divided Highways and Crossroads issued by the State Highway Engineer.
- 06/91 Former FDOT Topic Number 750-010-035 incorporated into TEM.
- Section 2.4 Symbol Signs on the State Highway System**
- 01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
- 12/06 Pen and Ink changes (updated references and/or links).
- 03/02 Updated references to Millennium MUTCD and included links to all references.
- 06/91 Former FDOT Topic Number 750-010-026 incorporated into TEM.
- Section 2.5 Destination Distance Signs at Rural Interstate and Freeway Exit Ramp Terminals**
- 01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
- 12/06 Pen and Ink changes (updated references and/or links).
- 06/91 Former FDOT Topic Number 750-010-024 incorporated into TEM.
- Section 2.6 Bridge Signs and Markings**
- 11/12 Mandatory changes to incorporate maximum vehicle height according to Section 316.515, F.S.
- 01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
- 12/06 Pen and Ink changes (updated references and/or links).
- 04/02 Updated references to Millennium MUTCD and included links to all references. We also standardized lettering size for the cross road signs on overpasses.
- 07/93 Cross Road Name Signs on Overpasses, added that signs can be installed if requested by law enforcement or emergency rescue organizations.
- 06/91 Former FDOT Topic Number 750-010-034 incorporated into TEM.
- Section 2.7 Place Name Signs on the State Highway System**
- 01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
- 04/05 Rescinded. Now Part IV of Rule 14-51, F.A.C., Florida's Highway Guide Sign Program.
- 05/02 Minor editorial changes to make current.
- 05/00 Editorial comments. Section 2.7.6(2) revised to add that place name signs located off state right-of-way must conform to statute.
- 06/91 Former FDOT Topic Number 750-010-036 incorporated into TEM.

Section 2.8	Move Accident Vehicles from Travel Lanes Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
06/04	Updated sign references to the 2004 Design Standards. Added optional graphic panel to limited access sign.
05/02	Updated references to Millennium MUTCD and included links to all references.
06/91	Incorporated into TEM.
Section 2.9	No Passing Zone Signs
07/12	Mandatory changes to incorporate MUTCD references.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
05/02	Created a link to the W14-3 sign in the new federal Standard Highway Signs.
06/91	Incorporated into TEM.
Section 2.10	Vending Machine Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
06/04	Added sign details.
06/91	Incorporated into TEM.
Section 2.11	Guidelines for Bicycle Warning Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
09/02	Updated references to the Millennium MUTCD and the 2002 Standard Highway Signs Manual.
07/00	Editorial comments. Added Section 2.11.4 to include sign design and instructions for Bicycle Sharing Road Sign. Change initiated due to Revision 5 of the MUTCD.
06/91	Incorporated into TEM.
Section 2.12	Recycling Collection Center Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
09/04	Updated sign references to the 2004 Design Standards.
09/02	Updated sign references to the 2002 Design Standards.
06/91	Incorporated into TEM.
Section 2.13	Signing for Safety Belt Use and Child Restraint Laws
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).

11/04	Updated sign references to the 2004 Design Standards and Sign Library.
01/03	Updated sign references to the 2002 Design Standards. Updated references to Millennium MUTCD.
07/00	Editorial Comments. Added sign details for all signs. Section 2.13.6 changed to add new design for Standard Safety Belt Sign.
03/93	Former FDOT Topic Number 750-010-014 incorporated into TEM.
Section 2.14	Signing for Hurricane Evacuation Routes
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
08/01	Changes were made to incorporate the process for signing for one-way operations and also radio frequency information signs during an evacuation. Also, the "hurricane" reference was removed from the title and throughout the document as this section is applicable to all types of evacuations.
09/99	Changes were made based on new direction of regional evacuation and sheltering plan. The Department's Emergency Coordination Office initiated changes.
08/93	Former Topic Number 750-020-006 incorporated into TEM.
Section 2.15	Smoke on Highway Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
03/02	Changes necessary following the Highway Safety Smoke Management Interagency Agreement. Included sign details for Temporary and Prescribed Burn Signs and requirements for the installation and removal of these signs. Also included links to all references.
04/96	Incorporated into TEM.
Section 2.16	Signing for Supplemental Guide Signs and Motorist Services on Limited and Non-Limited Access Highways
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
04/05	Rescinded. Now Rule 14-51, F.A.C., Florida's Highway Guide Sign Program.
09/99	Formatting changes and converted back to English.
Section 2.17	Emergency Highway Traffic Plan
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
04/09	Rescinded. Now covered under Topic No. 500-000-104, Emergency Management Program.
06/93	Incorporated into TEM.
Section 2.18	*FHP Highway Assistance Program
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.

12/06	Pen and Ink changes (updated references and/or links).
11/04	Updated sign references to the 2004 Design Standards and Sign Library.
01/03	Changed sign detail references to their FTP number in the Design Standards.
04/96	Incorporated into TEM.
Section 2.20	Call Box/Mile Marker Signs
04/14	Rescinded. Call boxes removed from State Highway System.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
09/04	Updated sign references to the 2004 Design Standards and Sign Library.
03/99	Section 2.20.2(1) and (2) increased measurement for installation. Also added sign design to include tenth of a mile measurement.
07/97	Incorporated into TEM.
Section 2.21	Florida Litter Law Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
06/04	Updated sign references to 2004 Design Standards. Minor revisions recommended by Signing Team.
07/97	Incorporated into TEM.
Section 2.22	Traffic Control for Toll Collection Facilities
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
04/09	Rescinded. Now included in Turnpike's Plans Preparation and Practices Handbook.
07/98	Former FDOT Topic Number 750-010-010 incorporated into TEM.
Section 2.23	Florida's Turnpike and Toll Road Numbering and Signing Program
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
11/01	Changes made were initiated by Management to include the use of the local road name or logo (to be provided by the local expressway authority) on the toll facility along with our Toll Route Marker. Updated references to Millennium MUTCD and the sign detail for the Toll Route Marker.
04/01	Section 2.23.4(3), last sentence. Allowed possibility of local road names to be used in a guide sign or directional sign. Change initiated by management.
07/98	Incorporated into the TEM.

Section 2.24 Placement of Crime Watch Signs on the State Highway System

01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
12/06 Pen and Ink changes (updated references and/or links).
05/04 Pen and Ink changes.
07/98 Former FDOT Instructional Memo Number 750-005 incorporated into TEM.

Section 2.25 Distance Signing for Non-Limited Access Highways

01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
09/99 Incorporated into TEM. Implements Action Plan 006 from our Evaluation of International Signing Practices Study (1994).

Section 2.26 Advance Guide Signs on Limited Access Highways

01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
12/06 Pen and Ink changes (updated references and/or links).
09/99 Incorporated into TEM. Implements Action Plan 007 of our Evaluation of International Signing Practices Study (1994).

Section 2.27 Commuter Assistance Signs

01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
12/06 Pen and Ink changes (updated references and/or links).
09/99 Incorporated into TEM. Developed from discussions with Public Transportation Office.

Section 2.28 Reference Location Signs (Mile-Markers)

09/14 Criteria established for both limited and non-limited access roadways.
01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
12/06 Pen and Ink changes (updated references and/or links).
04/00 Incorporated into TEM. Recommended by DTOE's during statewide meeting.

Section 2.29 Use of Fluorescent Yellow-Green Sign Sheeting

01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
12/06 Pen and Ink changes (updated references and/or links).
07/00 Incorporated into TEM. Developed to establish guidelines for the use of this innovative sheeting that was approved by the FHWA.

Section 2.30 Signing for One-Stop Career Centers

01/12 Mandatory changes to incorporate adoption of MUTCD 2009.
12/06 Pen and Ink changes (updated references and/or links).
08/04 Updated sign references to 2004 Design Standards.
07/00 Incorporated into TEM. Developed from sign request in District Four.

Section 2.31 Unique Transportation Symbol Signs

01/12 Mandatory changes to incorporate adoption of MUTCD 2009.

12/06	Pen and Ink changes (updated references and/or links).
08/02	Incorporated into TEM.
Section 2.32	511 Telephone Service Sign
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
06/04	Incorporated new FTP references.
06/02	Incorporated into TEM.
Section 2.33	Signing for Nature-based Tourism and Heritage Tourism Trails
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
09/02	Incorporated into TEM.
Section 2.34	Signing for Florida Scenic Highways Program and the National Scenic Byways Program
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/06	Pen and Ink changes (updated references and/or links).
10/04	Incorporated into TEM.
Section 2.35	Signing for Memorial Roadway Designations
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
07/06	Web address for Sign Library changed.
10/04	Incorporated into TEM.
Section 2.36	Wayfinding Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
04/07	Incorporated into TEM.
Section 2.37	Advance Street Name Signs
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
06/09	In order to provide consistency with the MUTCD, incorporated standards for advance street name signs not only for signalized intersections but non-signalized and the use of advance street name sign plaques for advance warning and intersection control signs.
04/07	Incorporated into TEM.
Section 2.38	Use of Temporary Stop Signs at Non-Functioning Signalized Intersections
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
05/07	Incorporated into TEM.
Section 2.39	Warning, Stop, and Yield Sign Sizes
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
10/07	Pen and ink changes made to table for consistency with final research report.

08/07	Incorporated into TEM.
Section 2.40	Displaying Messages on Dynamic Message Signs Permanently Mounted on the State Highway System
08/15	New approved messages added.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
08/08	Incorporated into TEM.
Section 3.1	Signalized Intersections Flashing Mode Operation and Flashing Beacons
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/09	Changes made consistent with MUTCD 2003.
10/93	Page III-1 removed provision that accident patterns need to be monitored at flashing yellow/red locations. Page III-2 removed option for flashing signal operations in relation to closing times.
06/91	Former FDOT Topic Number 750-010-023 incorporated into TEM.
Section 3.2	Guidelines for Left Turn Treatment
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
12/09	Changes made as recommended by DTOEs, figures added.
08/93	Under Left Turn Signal Phasing, changed left turn separation from 10 to 12 feet.
06/91	Incorporated into TEM.
Section 3.3	Scheduling Traffic Signal Studies and Funding Arrangements
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
10/93	Former FDOT Topic Number 750-010-001 incorporated into TEM.
Section 3.4	Emergency Traffic Control Signals
11/12	Mandatory changes to provide clarity and revise MUTCD reference.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
02/10	Added appropriate MUTCD 2003 signs and references.
04/96	Former FDOT Topic Number 750-020-004 incorporated into TEM.
Section 3.5	Traffic Signal Mast Arm Support Boundaries
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
02/10	Section title change, references to PPM added, direct links to pdf versions of District Boundary Maps included.
10/98	Incorporated into TEM.
Section 3.6	Standardization of Yellow Change and Red Clearance Intervals for Signalized Intersections
10/13	Changes to yellow change and red clearance intervals: (a) Increased perception reaction time to 1.4 seconds; (b) Round up Yellow Change Intervals to the next 0.1 sec; (c) Increased the minimum Yellow Change Interval to 3.4 seconds; (d) Increased the minimum Red

	Clearance Interval to 2.0 seconds and the maximum Red Clearance Interval to 6.0 seconds.
09/12	New language added to clarify and give guidance for determining the all-red clearance interval.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
07/11	Editorial changes made to clarify the method of determining yellow clearance time.
06/10	Changes necessary to have yellow and all-red intervals consist with ITE's Traffic Engineering Handbook.
07/05	These are guidelines so we changed Title to reflect it. Changed from "Standardization of Yellow and All-Red Intervals for Signalized Intersections."
06/02	Incorporated into TEM.
Section 3.7	Audible Pedestrian Signals
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
02/03	Incorporated into TEM.
Section 3.8	Mid-Block In-Roadway Lighted Pedestrian Crosswalks
10/14	Modified to reflect the language for crosswalk illumination to help implement safe crossing of pedestrians at midblock locations.
06/13	Changes necessary to refine the criteria for installing and operating mid-block pedestrian crosswalks.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
01/10	Substantive changes necessary to expand crossing treatments available with appropriate criteria and selection guidance included.
06/03	Changes necessary to conform to the MUTCD 2000 standards.
02/03	Incorporated into TEM.
Section 3.9	Countdown Pedestrian Signal Applications
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
03/07	Changes necessary to incorporate Department's policy on this device.
07/06	Changes necessary to give direction to districts on implementation.
04/03	Incorporated into TEM.
Section 4.1	Crosswalks in Heavy Pedestrian Concentration Areas
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
08/04	Incorporated latest MUTCD 2003 changes.
06/91	Former FDOT Topic Number 750-020-008 incorporated into TEM.
Section 4.2	Pavement Word, Symbol, and Arrow Markings
02/15	Added new subsection for Route Shields for Wrong Way Treatment.
05/14	Pen and ink changes to update figures.

10/13	Changes necessary to bring the proper clarification for pavement markings and route shields into the TEM.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
06/91	Former FDOT Topic Number 750-010-020 incorporated into TEM.
Section 4.3	Use of Blue Raised Pavement Markers to Identify Fire Hydrants
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
07/98	Former FDOT Instructional Memorandum Number 750-004 incorporated into TEM.
Section 4.4	Roundabout Markings
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
07/07	Incorporated into TEM.
Section 5.1	Golf Cart Crossings and Operation on the State Highway System
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
10/11	New section in new “Specialized Operational Topics” chapter.
Section 5.1	Computer Models for Traffic Engineering and ITS Analysis and Design
11/10	Rescinded.
06/91	Former FDOT Topic Number 750-030-005 incorporated into TEM.
Section 6.1	Elder Road User Program
04/07	Rescinded. Information contained in section provided on our Safe Mobility for Life Program (Topic No. 000-750-001) website.
06/98	Incorporated into TEM. Initiated by our Elder Road User Program FDOT Topic Number 000-750-001.
Section 6.2	Warning, Stop, and Yield Sign Sizes to Accommodate the Elder Roadway User in Florida
08/07	Rescinded. Information contained in Section 2.39 (Warning, Stop, and Yield Sign Sizes).
06/98	Incorporated into TEM. Based on research developed from our Elder Road User Program.
Section 6.3	Intersection Guide Signs
04/07	Rescinded. Information contained in Section 2.37 (Advance Street Name Signs).
06/98	Incorporated into TEM. Based on research developed from our Elder Road User Program.
Section 7.1	Approved Product List Certification and Approval Process
07/12	Rescinded. Changed into a local procedure and link shown in section.
01/12	Mandatory changes to incorporate adoption of MUTCD 2009.
03/11	Title changed and APL Vendor Qualification Program was added.

03/99 Changes made to the Product Approval Process, Temporary Permit Process and APL Review Process. Moved remaining APL procedures from our MSTCSD specifications to this section.
Former FDOT Topic Number 750-010-013 incorporated into TEM.

INDEX

Statutes, Rules and Procedures pertaining to Traffic Engineering

A.1.1	STATUTES
Chapter 20	Organizational Structure
20.23	Department of Transportation
Chapter 258	State Parks and Preserves
258.007	Powers of division
Chapter 267	Historical Resources
267.062	Naming of state buildings and other facilities
Chapter 316	State Uniform Traffic Control
316.002	Purpose
316.003	Definitions
316.006	Jurisdiction
316.007	Provisions uniform throughout state
316.0076	Regulation and use of cameras.
316.008	Powers of local authorities
316.0083	Mark Wandall Traffic Safety Program
316.074	Obedience to and required traffic control devices
316.0741	High-occupancy-vehicle lanes
316.0745	Uniform signals and devices
316.07456	Transitional implementation
316.0747	Sale or purchase of traffic control devices by nongovernmental entities; prohibitions
316.075	Traffic control signal devices
316.0755	Pedestrian control signals
316.076	Flashing signals
316.0765	Lane direction control signals
316.077	Display of unauthorized signs, signals, or markings
316.0775	Interference with official traffic control devices or railroad signs or signals
316.0776	Traffic infraction detectors; placement and installation
316.078	Detour signs to be respected
316.079	Duty to yield to highway construction workers
316.0875	No-passing zones
316.088	One-way roadways and rotary traffic islands

316.089	Driving on roadways laned for traffic
316.090	Driving on divided highways
316.091	Limited access facilities; interstate highways; use restricted
316.1001	Payment of toll on toll facilities required; penalties.
316.121	Vehicles approaching or entering intersections
316.122	Vehicle turning left
316.123	Vehicle entering stop or yield intersection
316.126	Operation of vehicles and actions of pedestrians on approach of authorized emergency vehicle
316.130	Pedestrians; traffic regulations
316.1305	Fishing from state road bridges
316.1355	Driving through safety zone prohibited
316.1575	Obedience to traffic control devices at railroad-highway grade crossings
316.171	Traffic control devices at railroad-highway grade crossings
316.183	Unlawful speed
316.187	Establishment of state speed zones
316.189	Establishment of municipal and county speed zones
316.1895	Establishment of school speed zones, enforcement; designation
316.1945	Stopping, standing, or parking prohibited in specified places
316.195	Additional parking regulations
316.1995	Driving upon sidewalk or bicycle path
316.212	Operation of golf carts on certain roadways
316.2122	Operation of low-speed vehicle or mini-trucks on certain roadways
316.2125	Operations of golf carts within a retirement community
316.2126	Authorized use of golf carts, low-speed vehicles, and utility vehicles
316.2127	Operation of utility vehicles on certain roadways by homeowners' associations
316.614	Safety belt usage
316.75	School crossing guards
Chapter 334	Transportation Administration
334.03	Definitions
334.035	Purpose of transportation code
334.044	Department; powers and duties
334.046	Department mission, goals, and objectives
Chapter 479	Outdoor Advertising
479.16	Signs for which permits are not required

Chapter 553 Building Construction Standards

[553.5041](#) Parking spaces for persons who have disabilities

Chapter 1006 Support for Learning

[1006.21](#) Duties of district school superintendent and district school board regarding transportation

[1006.23](#) Hazardous walking conditions

[1006.66](#) Regulation of traffic at universities

Chapter 1013 Educational Facilities

[1013.36](#) Site planning and selection

A.1.2 [Active Traffic Engineering and Operations Procedures and Policy Statements](#)

A.1.3 Rules

[14-15.010](#) Adoption of Manual on Uniform Traffic Control Devices (MUTCD)

[14-15.012](#) Speed Zoning for Highways Streets and Roads in Florida

[14-51](#) Florida's Highway Guide Sign Program 