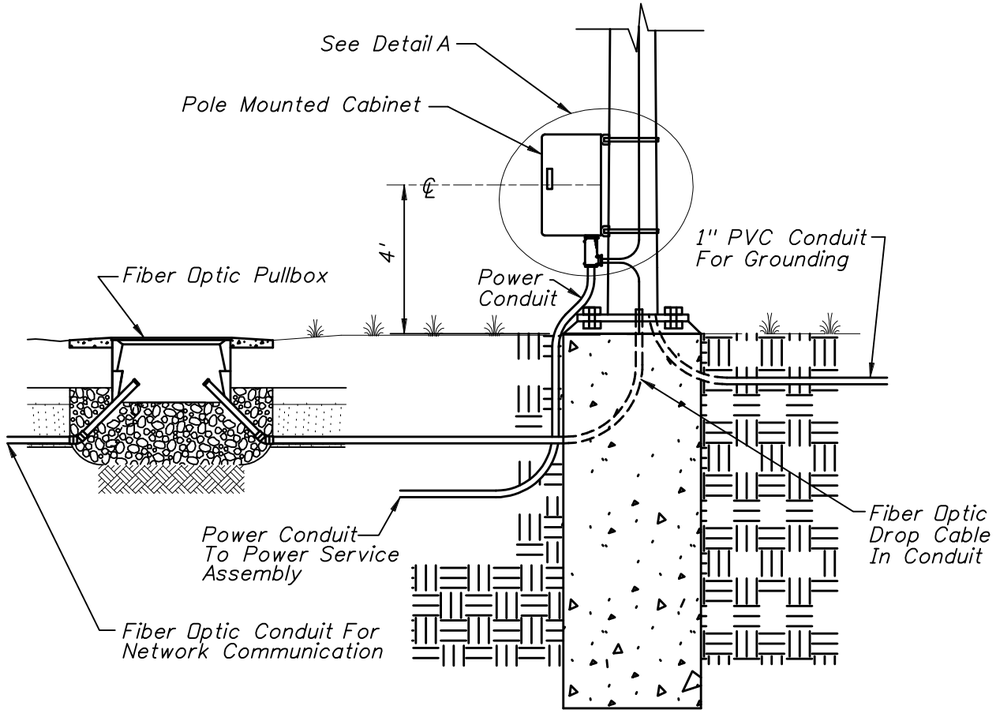

STEEL POLE

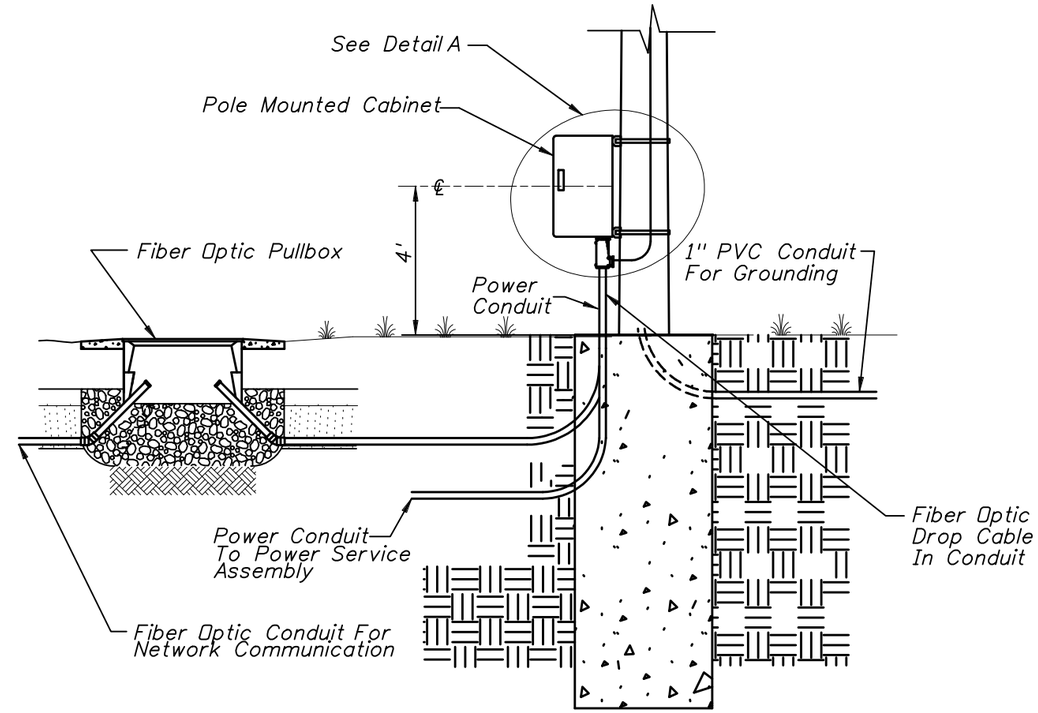

CONCRETE POLE

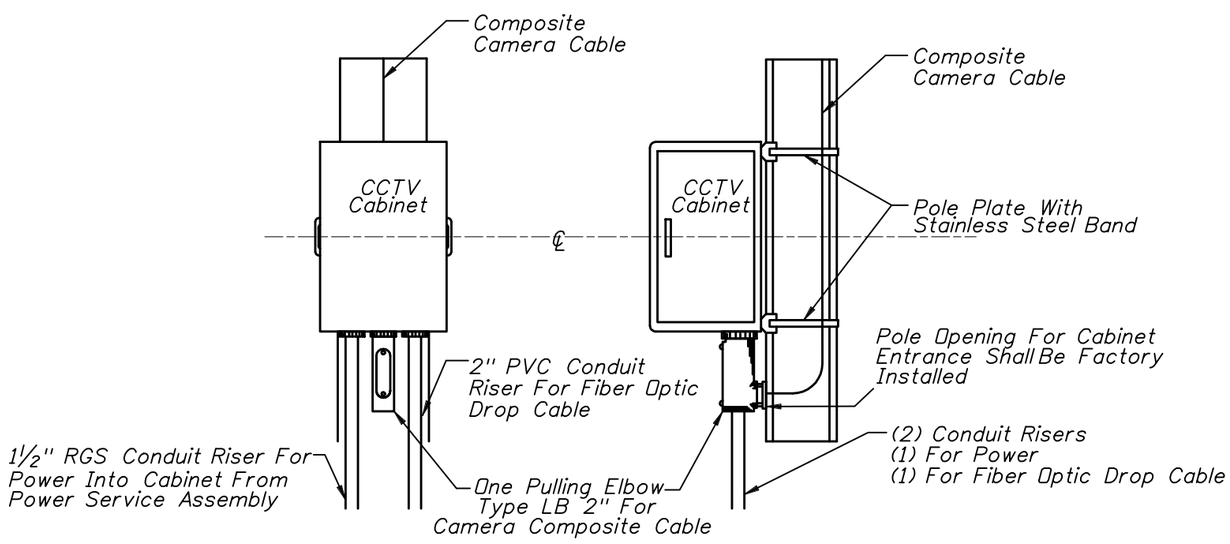

FRONT VIEW SIDE VIEW

DETAIL A

GENERAL NOTES:

1. Contractor shall splice fiber optic cables in cabinet to preterminated patch panel.
2. Furnish and install TVSS protection on all cabling in cabinet.
3. Furnish and install secondary TVSS protection on outlets for equipment hardware in cabinet.
4. Size and type of conduits for network communications between the pullbox and cabinet shall be shown in the plans.
5. See Index 18102 for grounding requirements.
6. All network communications conduits and ducts shall be sealed with approved waterproof duct plugs / seals.
7. Pole mounted cabinets shall be mounted with hinges next to the pole.

Not To Scale

REVISIONS

Date	By	Description	Date	By	Description
01/01/06	ITS	New Design Standard Index.			

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

2006 Interim Design Standard

POLE MOUNTED CCTV CABINET

Interim Date	Sheet No.
01/01/06	1 of 1

Index No. 18108