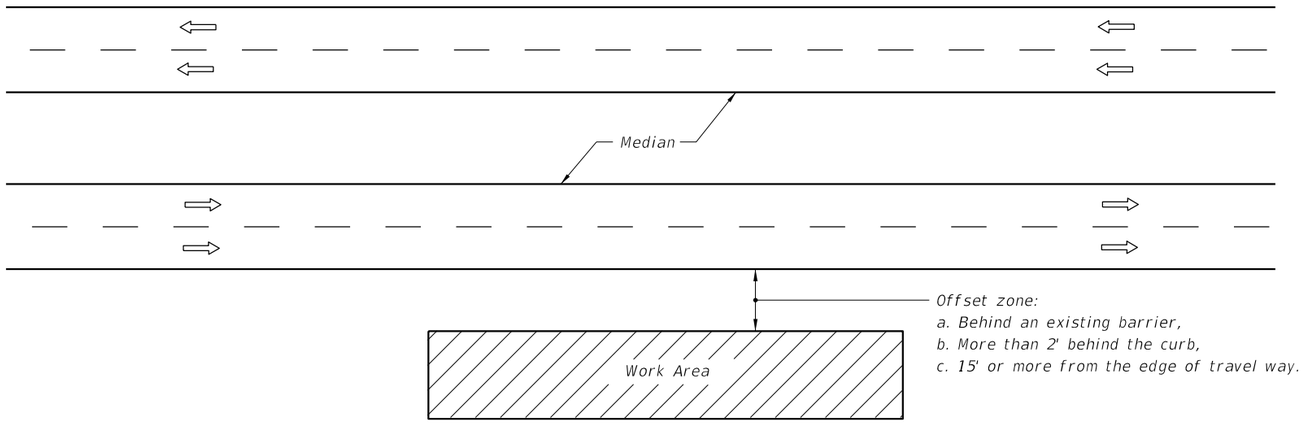


## SYMBOLS

Work Area

Lane Identification + Direction of Traffic

## GENERAL NOTES

1. If the work operation (excluding establishing and terminating the work area), requires that two or more work vehicles cross the offset zone in any one hour, traffic control will be in accordance with Index No. 612.
2. No special signing is required.
3. This index also applies when work is being performed on a multilane undivided highway.
4. This index also applies to work performed in the median behind an existing barrier or more than 15' from the edge of travel way, both roadways. Work performed in the median behind curb and gutter shall be in accordance with Index No. 612.
5. When a side road intersects the highway within the work area, additional traffic control devices shall be placed in accordance with other applicable TCZ Indexes.
6. When construction activities encroach on a sidewalk, refer to Index No. 660.
7. For general TCZ requirements and additional information, refer to Index No. 600.

## CONDITIONS

WHERE ANY VEHICLE, EQUIPMENT, WORKERS AND THEIR ACTIVITIES ARE BEHIND AN EXISTING BARRIER, MORE THAN 2' BEHIND THE CURB, OR 15' OR MORE FROM THE EDGE OF TRAVEL WAY.

12/3/2015 9:04:48 AM

| LAST REVISION | REVISION | DESCRIPTION: | FY 2016-17 DESIGN STANDARDS | MULTILANE WORK OUTSIDE SHOULDER | INDEX NO. | SHEET NO. |
|---|---|---|---|---|---|---|
| 07/01/05 | | | FDOT | | 611 | 1 of 1 |