


Notes:

- 1. Bottom edge of signs shall be approximately at the same elevation.
- 2. Type B & C attachments with one hanger shall have wind beams for signs wider than 3½. The beams shall extend to within 6" of the sign edge.
- 3. Type B & C attachments for signs 4' and wider shall have 2 hangers. Signs 7' and wider shall have wind beams that extend to within 6" of the sign edge.
- 4. Type D attachments shall be for signs $3\frac{1}{2}$ wide or less.
- 5. Sign panels shall meet the requirements of Index 11200.
- 6. Refer to section 634 of the Standard Specifications For Road And Bridge Construction.
- 7. All bolts, nuts, and washers shall be passivated stainless steel, AISI 300 series, commercial grade, type 316.

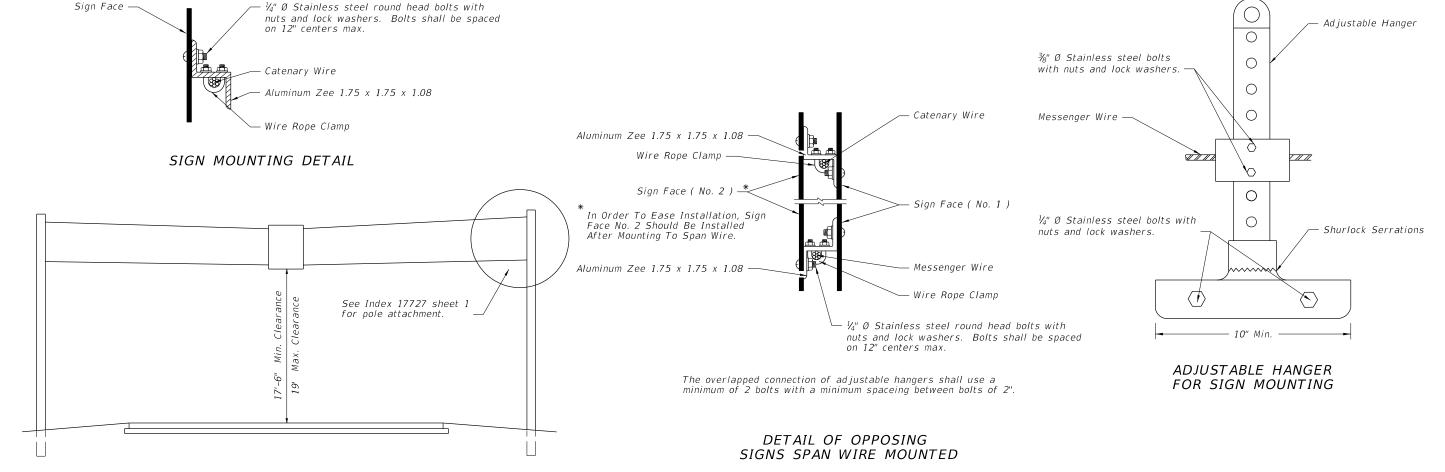

TYPICAL SPAN WIRE INSTALLATION

TWO POINT ATTACHMENT

LAST REVISION 07/01/09

DESCRIPTION:

FDOT

FY 2016-17 DESIGN STANDARDS