# Index D20910 Approach Slabs (30 Ft.) (Rigid Pavement Approaches)

## **Design Criteria**

AASHTO LRFD Bridge Design Specifications; Structures Detailing Manual (SDM)

#### **Design Assumptions and Limitations**

Index D20910 is intended to be used with concrete (rigid) roadway approach pavement in association with single-slope traffic railing *Developmental Design Standard* Indexes D426, D427 and D428.

Approach Slabs are intended to provide a smooth vertical transition between the roadway approach pavement and the bridge. They are supported at the bridge end by the end bent and by the embankment at the roadway approach end. This support configuration allows the Approach Slabs to rotate and settle as the roadway approach embankment settles. No additional supports (piles, footings, etc.) are required or allowed.

Index 20910 works with Index 306 Bridge Approach Expansion Joint Concrete Pavement. The roadway approach end of the Approach Slab must be non-skewed to match up with Index 306.

See **SDG** 3.1.H for distribution of design loads from the approach slab to the end bent.

The details of the approach slab adjacent to the End Bent Backwall as shown on the standard are intended for use with Poured Joint with Backer Rod and Strip Seal Expansion Joints. If other expansion joint types are used, e.g. finger or modular expansion joints, modifications to the standard may be required to accommodate the expansion joints and the blockouts used to install them.

### **Plan Content Requirements**

Index D20910 requires supplemental sheets, a completed data table and reinforcing bar lists to be included in the Structures Plans. Some roadway elements may need to be carried onto the approach slab, and in these cases special attention must be given to clarifying in the plans which elements are to be included as part of the roadway.

In the Roadway Plans:

Include details and payment for the optional base under the approach slab. The minimum structural requirement under the approach slab is Optional Base Group 2. If the optional base group for the roadway approaches is Group 2 or better, the same base group may be continued under the approach slab.

In the Structures Plans:

Include supplemental sheets showing as a minimum a Plan View with geometry and pertinent information not covered by this standard e.g., Survey Lines, PGL, Direction of Stationing, Phase Construction Joints, Raised Sidewalks and any other information necessary to accurately complete detailing of the Approach Slabs. Label Approach Slab

by name or Index number. Match the skew angle of the bridge at the bridge end of the Approach Slab. The roadway approach end of the Approach Slab shall be non-skewed (perpendicular to the stationing line) to match up with the details shown on Index 306 Bridge Approach Expansion Joint Concrete Pavement.

Urban roadway approaches usually have a 6-inch raised sidewalk. If the raised sidewalk is not continued across the bridge, when possible, transition the raised sidewalk to the bridge sidewalk over the length of the approach slab. Design and detail the transition to prohibit low spots or ponding and to redirect or collect runoff from the bridge and approach slab onto suitable roadway or into drainage structures.


When raised sidewalks are required on the approach slab, include the details for the sidewalks with the approach slab sheets. Concrete quantities for raised sidewalks on the approach slab shall be paid for as approach slab concrete.

Include Approach Slab Finish Grade Elevations with the Bridge Finish Grade Elevations.

Include reinforcing bars in the Reinforcing Steel List. All reinforcing bars are straight bars (Types 1 and 2). Bars C are 5'-0" long #5 Bars for the 36" Single-Slope Traffic Railing (Index D427) or #6 Bars for the 42" Single-Slope Traffic Railing (Index D428).

Include raised sidewalk concrete quantity in Concrete Class II Approach Slab.

Complete the following "Approach Slab Table of Dimensions" and include it on the supplemental sheets. See Introduction I.3 for more information regarding use of Data Tables.

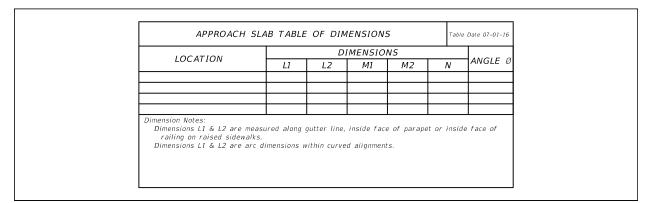

## Payment.

Item number	Item description	Unit Measure
400-2-10	Concrete Class II, Approach Slabs	CY
400-9	Bridge Deck Grooving and Planing - Deck Thickness 8.5" or Greater	SY
415-1-9	Reinforcing Steel - Approach Slabs	LB

The embankment and base required under the approach slabs shall be paid for using the standard roadway pay items and the quantities included in the roadway plans.