

908 Stormwater Runoff Control Concept Worksheet

908.1 General

Stormwater Runoff Control Concept (SRCC) worksheet is provided to the Contractor to facilitate Contractor compliance with **Standard Specifications, Section 104**. These sheets may also be used to convey supplemental information during the plans phase review process. These sheets are not to be placed within the Contract Plans Set. Signing and sealing these sheets is not required.

Enter a PDF of these sheets into the “Permits” Project CADD folder. The worksheet may be entered into the Electronic Review Comments (ERC) system with the Phase III and Phase IV plans submittals, for review by District MS4 permit coordinators and District construction staff.

See **Exhibit 908-1** for an example of a SRCC Worksheet.

908.2 Sheet Set Up

This sheet may be produced on a standard-format sheet (11”x17”) or a large-format sheet (24”x36”, 36”x48” or 36”x72”). Use landscape orientation regardless of sheet size selected.

Use the following horizontal scales:

	<u>Standard</u>	<u>Optional</u>
Curbed Roadways	1” = 40’	1” = 50’
Flush-shoulder Roadways	1” = 50’	1” = 100’

908.3 Required Information

As illustrated in *Exhibit 908-1*,

The worksheet must display the following:

- (1) Centerline or Baseline of construction
- (2) R/W limits
- (3) Limits of Construction activities
- (4) Overland flow drainage patterns
- (5) Areas of soil disturbance
- (6) Areas which will not be disturbed
- (7) Locations of major structural and nonstructural controls
- (8) Locations of areas where stabilizations practices are expected to occur
- (9) Location of surface waters and wetlands
- (10) Location of project discharge locations (to surface water or MS4)

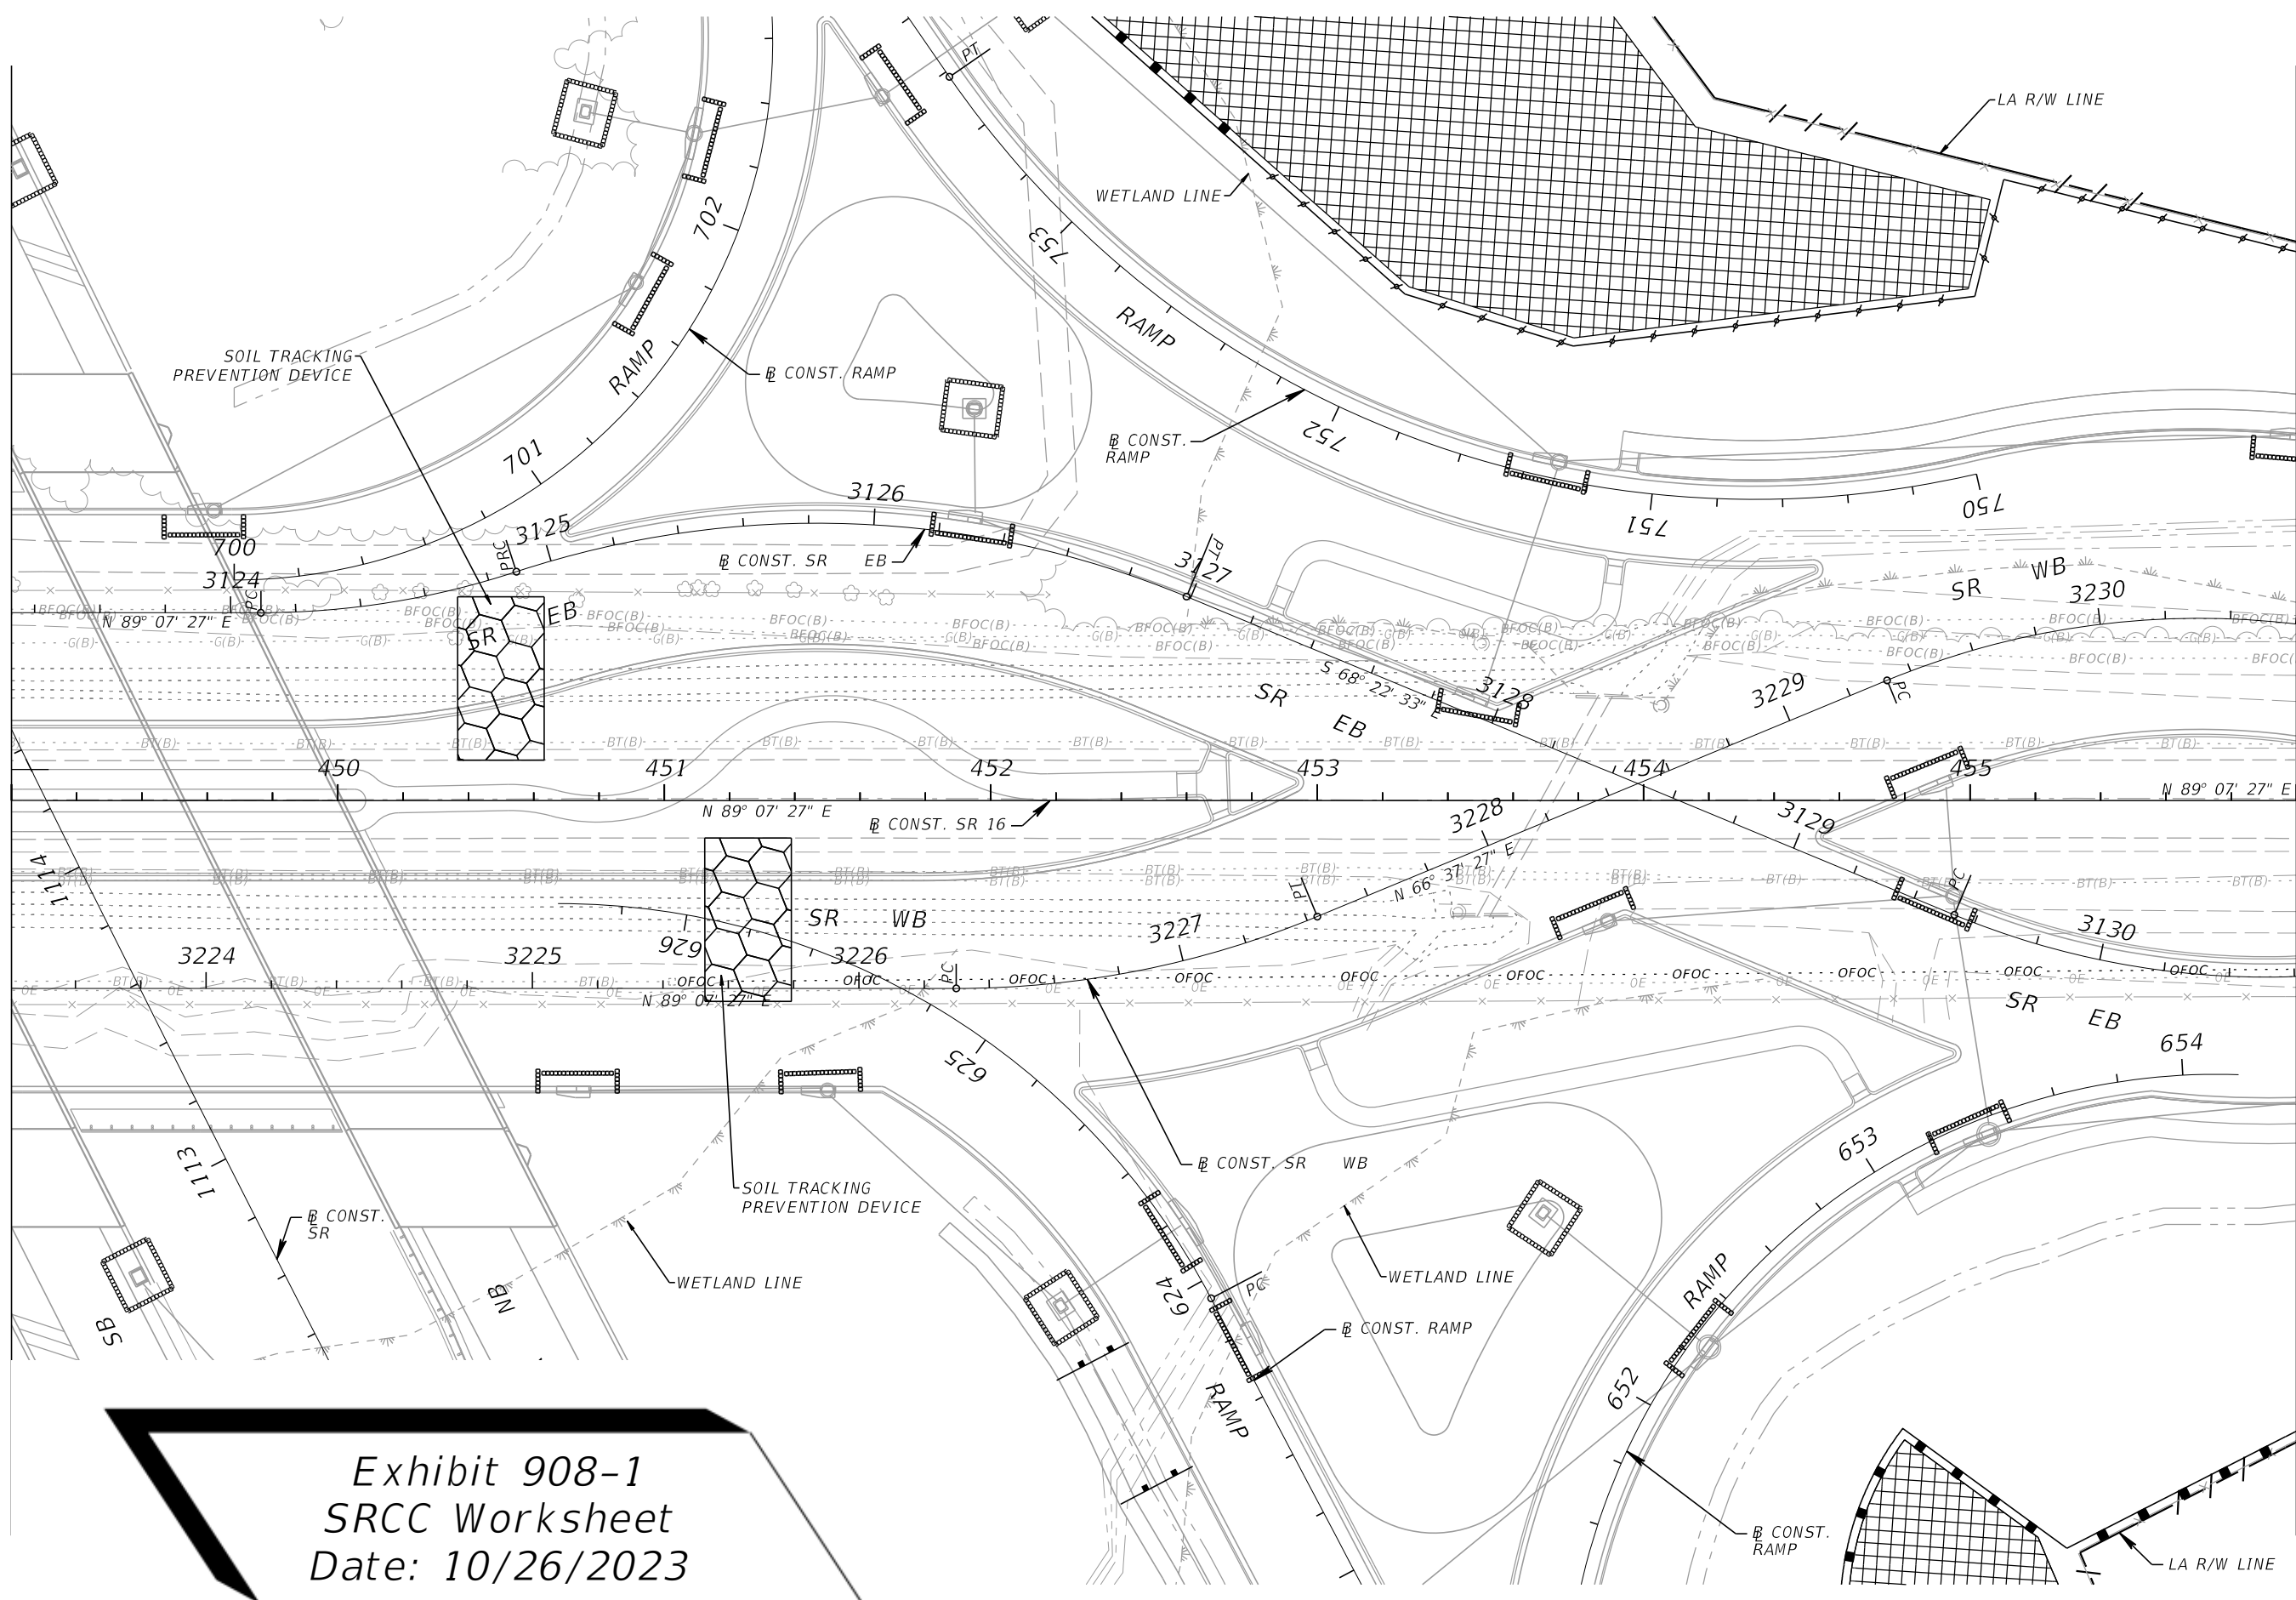


Exhibit 908-1
 SRCC Worksheet
 Date: 10/26/2023