
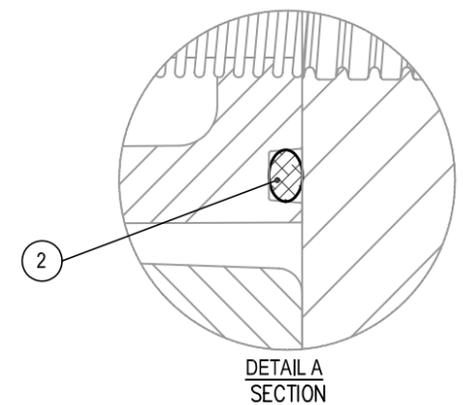
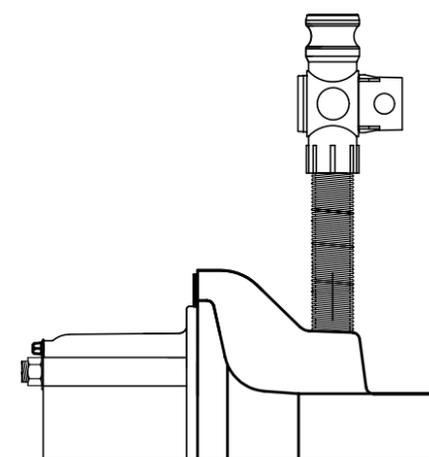


ITEM	QTY	DESCRIPTION	MATERIAL	DRAWING REFERENCE	INVENTORY NUMBER
*16	1	SPIRAL, #4, DIA. 11", 3" PITCH, 6.5 TURNS	A615		02BP0095
15	1	BEARING PLATE GROUT PLUG, 23 MM		C583	02DT0341
14	1	DUCT, WHT PP, 59MM PT-PLUS	P.P.		02DT0412
13	1	HEAT SHRINK			(CANUSA) PLA-63-YE
12	1	GROUT VALVE, 23 MM	P.S.	C500 & C501	02DT0311
11		GROUT HOSE, 23 MM (21 MM)	P.E.		02DT0310
10	1	CAP VENT PLUG - SS SCREW	STAINLESS STEEL		02WX7001
9		GROUT	JOB SPECIFIC		
8	7	1.6G WEDGE	11-L-17	C218.1	02WG0008
7	1	ECI 6-7 ANCHOR HEAD	A536 GR80-55-06	C556	02AH0036
6	1	ECI 6-7 BEARING PLATE	A536 GR80-55-06	C552	02BP0036
5	4	1/2"-13 NUT	(316L) STAINLESS	-	INCLUDED W/02WX5014
4	4	Ø1/2" FLAT WASHER	(316L) STAINLESS	-	INCLUDED W/02WX5014
3	4	1/2-13 NC x 5 1/2"	(316L) STAINLESS	-	02WX5014
2	1	6-7 GROUT CAP O-RING	BUNA-N 70 D.	-	02WX5013
1	1	6-7 GROUT CAP	ABS LUSTRAN 633	C547	02WX5012

\* USE ITEM 16 FOR CONCRETE WITH  $f_c' = 3500$  psi, AND  $f_c' = 5500$  psi

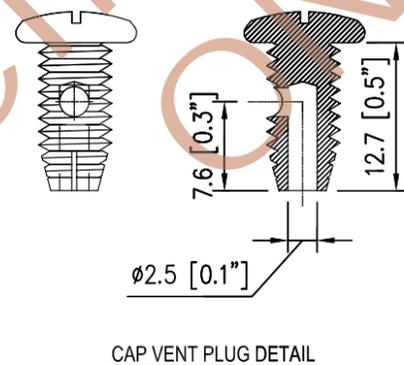

VStructural LLC (VSL) reserves a strict proprietary right in all drawings, specifications, and calculations. Information set forth on this sheet, the use of such information, or any reproduction thereof, is restricted to the site for which it was prepared and to the project identified herein. Any other use is strictly prohibited and VSL DISCLAIMS ANY LIABILITY therefrom.

**VSL**  
7455 NEW RIDGE RD.  
HANOVER, MD. 21076  
WWW.VSL.NET

DWG. TITLE: ECI 6-7 INTERNAL TENDON W/ 59MM PT-PLUS DUCT ASSEMBLY  
PROJECT: VSL SYSTEMS DRAWINGS

APPROVED FOR CONSTRUCTION	DATE	REV.	BY	CHK
	4/5/06	1		GDH ZX

SCALE:

VSL JOB NO:

VSL DWG. NO. A155

Copyright © 2004 VStructural LLC (VSL) All rights reserved. The drawings, specifications and calculations set forth on this sheet may not be reproduced, changed, copied or transmitted in any form or by any means, electronic or mechanical, including, but not limited to, photo-copying and recording, or by any information stored to a retrieval system, except as may be expressly permitted in writing by VSL. Any unauthorized use is strictly prohibited, and VSL disclaims any liability therefrom.