



Tech: _____ Date: / /

Yr: _____ Make: _____ Model: _____ Mileage : _____

VIN: _____ Lift Model _____ Serial# _____ Cycles _____

Legend: = OK, passed at this time = Marginal, recommend in near future = Failed

P M F GENERAL INSPECTION:

- Lift Battery, Circuit Breaker & Cable _____
- Lift Ground & Secondary Ground _____
- Vehicle Interlock Power _____
- Veh. Interlock Prohibits Veh. Movement _____
- Lift Door Condition _____
- Hand Pendant Condition/Function _____
- Inspect Mounting Components _____

CYCLE CHECK:

- General Operation Through Complete Cycle _____
- Main, Handrail, OB & IB Bumper Adjustments _____
- Floor Level Adjustment _____
- Platform Angle Adjustment _____
- Outer Barrier Interlock _____
- Inner Barrier Interlock _____
- Threshold Warning Interlock _____
- 50 Pound Fold Interlock _____
- Platform Lights _____
- Anti-Skid _____
- Operation & Warning Decals _____
- Back-up Pump Handle Location _____
- Manual Override/Back-up System Function _____

MECHANICAL COMPONENTS:


- Base Plate, Tower, Arm & Platform Welds _____
- Outer Barrier Pins, Gas Springs & Fasteners _____
- Inner Barrier Pins, Gas Springs & Fasteners _____
- Pivot Pin Fasteners _____
- Pivot Pins & Bushing Condition _____
- Handrails _____
- Lift-Tite System _____

HYDRAULIC COMPONENT CHECKS:

- Leaks _____
- Hoses & Harness Routing/Condition (pump, parallel arms, vertical arms & platform) _____
- Remove Pump Cover & Check Fluid Level _____
- Fluid Condition _____
- Lift Pump Motor Cables/Connections _____
- Lift Pump Harnesses/Fuses/Electrical Components _____

Additional Comments:

Lubrication Diagram

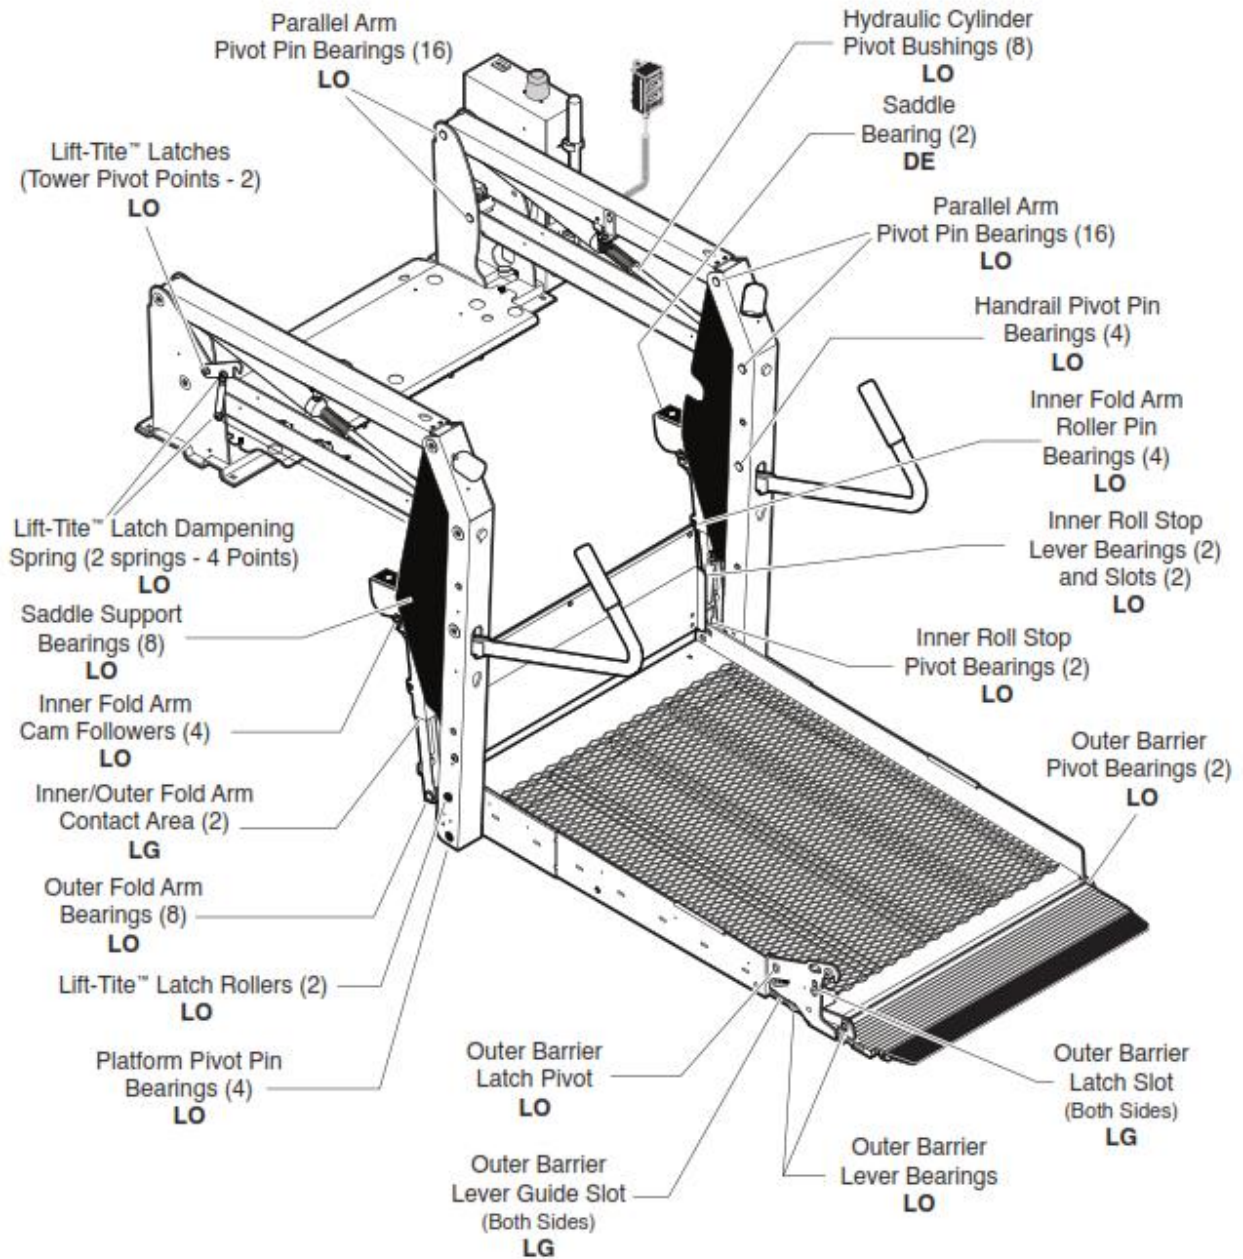

See the Maintenance/Lubrication Schedule for recommended applications per number of cycles.

Lubricant	Type	Specified (recommended) Lubricant	Available Amount	Braun Part No.
LO - Light Oil	Light Penetrating Oil (30 weight or equivalent)	LPS2, General Purpose Penetrating Oil	11 oz. Aerosol Can	15807
DE - Door-Ease	Stainless Stick Style (tube)	Door-Ease Stick (tube)	1.68 oz.	15806
LG - Light Grease	Light Grease (Multipurpose)	Lubriplate	14 oz. Can	15805