

GENERAL NOTES:

2.

З.

4.

5 6 7. 8. 9. 10.

previned to lowering device at the factory.
The lowering device manufacturer shall supply both a portable lowering tool with a manual hand crank and a half-inch chuck variable-speed reversible industrial-duty electric drill that matches the winch's manufacturer-recommended revolutions per minute. One lowering tool per every 10 lowering devices is required.
The lowering device manufacturer shall provide an on-site installation inspection and operator instruction and certification. This ensures the product is assembled correctly and that all necessary persons are trained in the proper, safe operation of the system. Before erecting the first pole the contractor must contact the lowering device supplier and schedule a manufacturer's representative to be on-site.
Design camera mounting arm and connection to tenon according to FDOT Structures Manual (current edition).
Camera to be mounted to camera junction box and stabilizing weight via $1^{1}\!\!\!/_{2}^{\prime\prime}$ Standard NPT Pipe Thread.
Use air terminal extension when the pole top junction box is wider than top of pole.
The stainless steel device lowering cable shall be installed inside the pole within a 1 V_4 " diameter PVC conduit.
All communication and power cables must be neatly bundled and secured.
Use a Camera Lowering Device listed on the Approved Product List (APL).
See Index 641–020 for concrete pole details and Index 649–020 for steel pole details.

LAST REVISION 11/01/17






FY 2018-19 STANDARD PLANS

CAMERA MOUNTING DETAI

	Disconnect Unit Fitter
	Pulley
	EPDM 0-Ring Seal
	Disconnect Unit
<u> </u>	Connector Socket
$\overline{}$	Disconnect Unit Cover
	Guide Pin
	Double Support Arms
	Sealing Gasket (Between Lower Contact Assembly And Junction Box)
$\overline{}$	Strain Relief Fitting
	TVSS Surge Protection For Power, Data And Video
ICE D	DETAIL

CAMERA MOUNTING WITH LOWERING DEVICE

	INDEX	SHEET
ILS	659-020	1 of 2

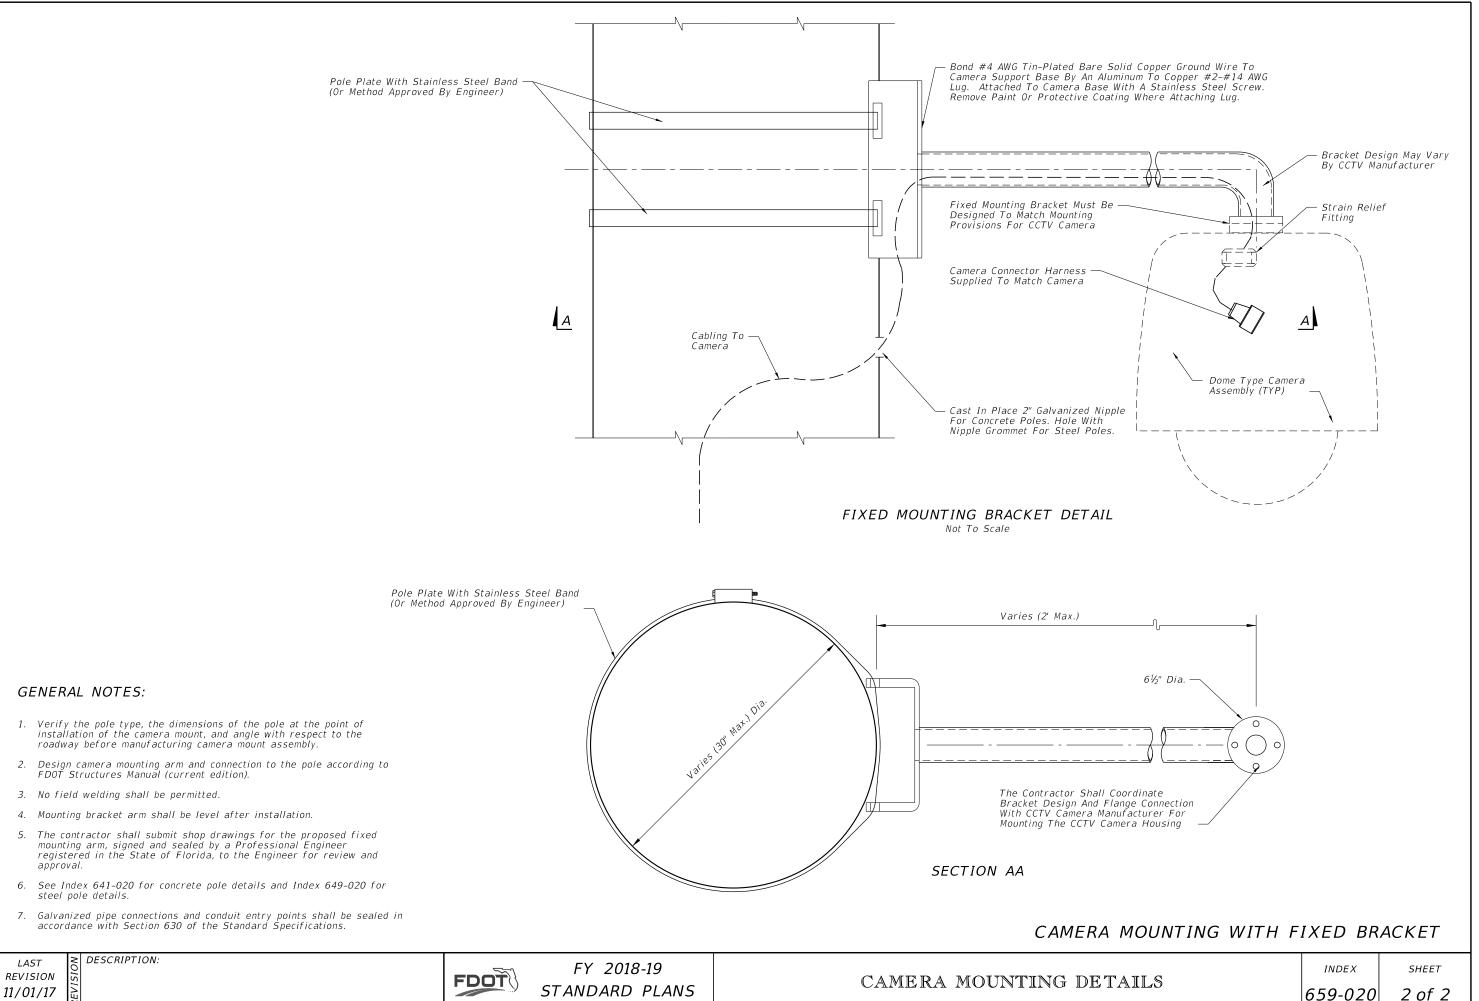

LAS
REVI

