
WORK ON SHOULDER

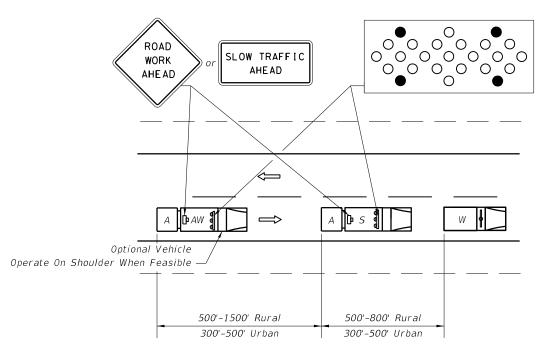

ADVANCE WARNING ARROW **BOARD MODE • CAUTION**

The Advance Warning Vehicle (Optional) may be used at the direction of the Engineer. If an Advance Warning Vehicle is operated within the travel way, an approved Truck Mounted Attenuator will be required on the Advance Warning Vehicle but not required on the Shadow Vehicle. The Advance Warning Arrow Board and Warning Sign are required on both the Advance Warning and Shadow Vehicles.

WORK IN TRAVEL WAY

GENERAL NOTES

- 1. Where work activities within 2' of the edge of travel way are incidental (i.e., Mowing, Litter Removal), the Engineer may delete requirements for signs and the advance warning vehicle provided vehicles in the work area have high-intensity rotating, flashing, oscillating, or strobe lights operating.
- 2. If an arrow board is used, the caution mode shall be used.
- 3. Shadow and Advance Warning Vehicle shall display rotating/strobe lights.
- 4. For general TCZ requirements and additional information, refer to Index No. 600.

CONDITIONS

WHERE ANY VEHICLE, EQUIPMENT, WORKERS OR THEIR ACTIVITIES REQUIRE AN INTERMITTENT OR CONTINUOUS MOVING OPERATION.

Work Vehicle With Rotating/Strobe Lights Shadow (S) Or Advance Warning (AW) Vehicle with Advance Warning Arrow Board and Sign Message

Advanced Warning Arrow Board



FDOT 2014 **DESIGN STANDARDS**

TWO-LANE, TWO-WAY, MOBILE OPERATION, WORK ON SHOULDER AND WORK WITHIN THE TRAVEL WAY

INDEX NO. 607

SHEET NO. 1 of 1

SYMBOLS

Work Area

Sign With 18" x 18" (Min.) Orange Flag And Type B Light

 \Longrightarrow

Work Zone Sign Lane Identification + Direction of Traffic

W

X

Truck/Trailer Mounted Attenuator (TMA)

≥ DESCRIPTION: