

GENERAL NOTES:


- 1. Work this Index with Index 425-052.
- 2. Quantities are for informational and estimating purposes only.

TABLE OF CONTENTS:				
Sheet	Description			
1	General Notes and Contents			
2	Inlet Type C (Modified)			
3	Special Concrete Endwall			
4	Shallow Ditches and Yard Drains			

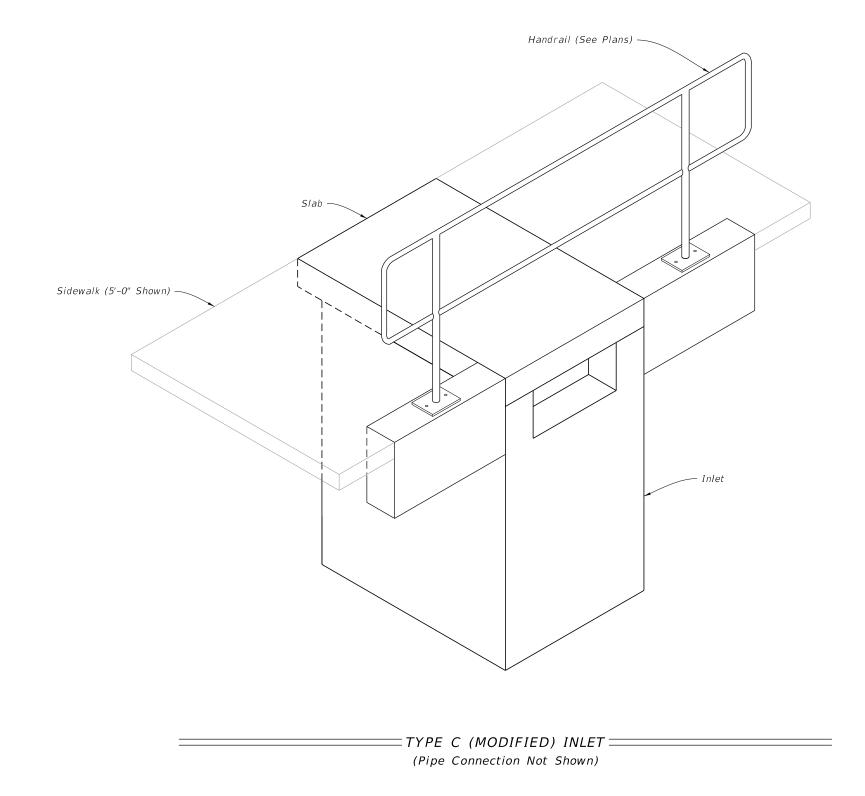

≥ DESCRIPTION: REVISION 11/01/20

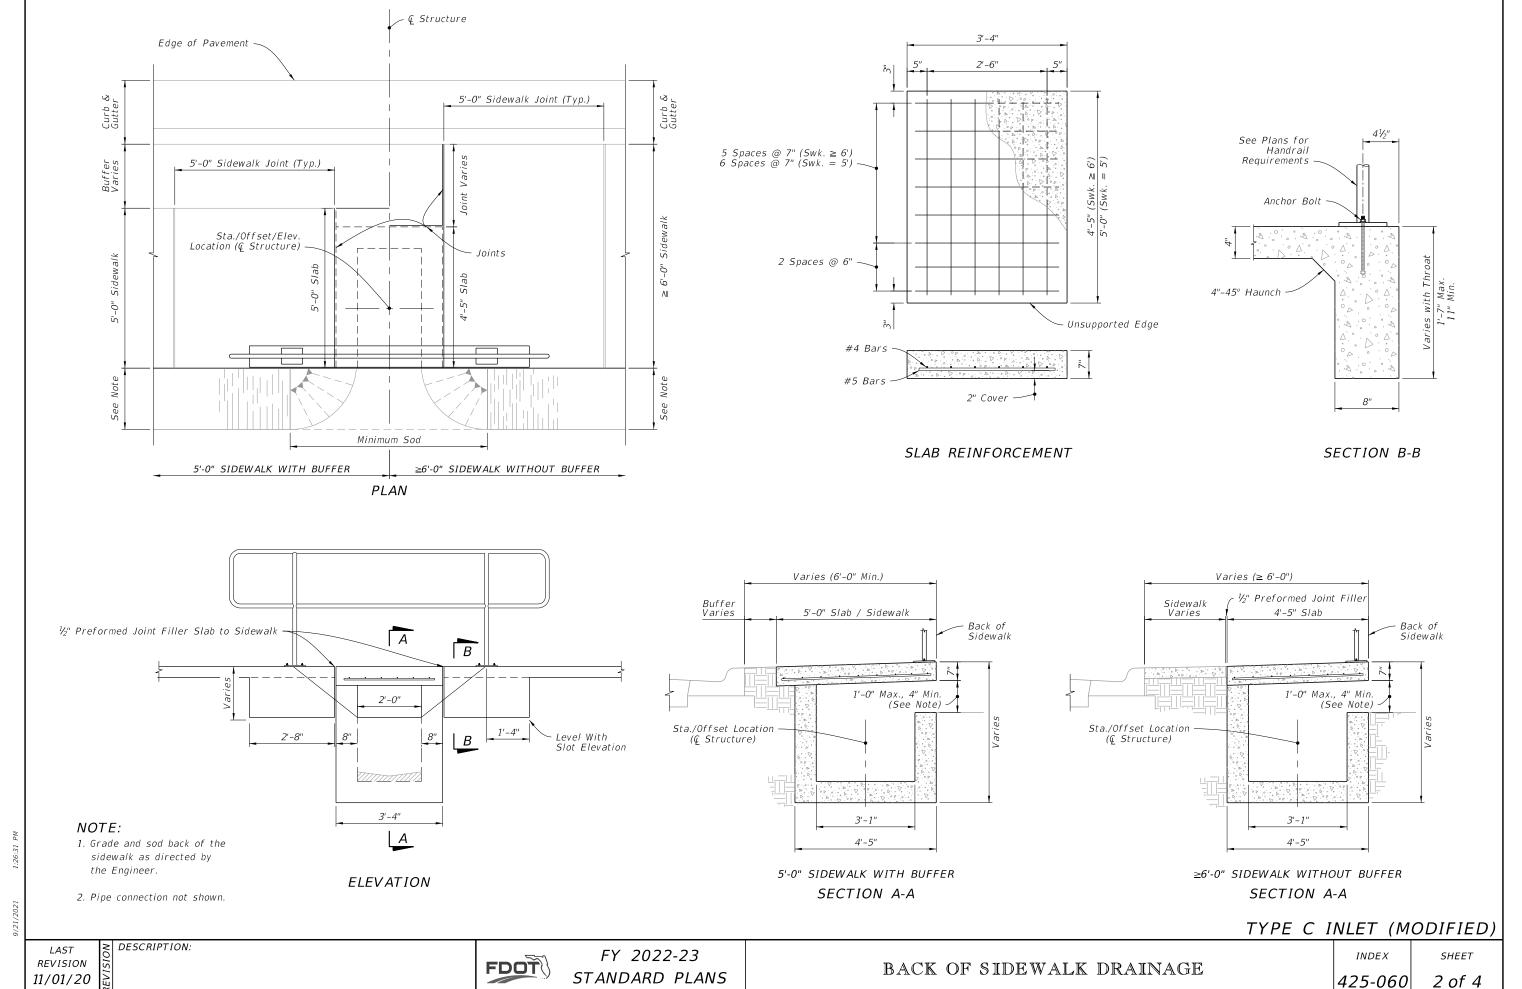


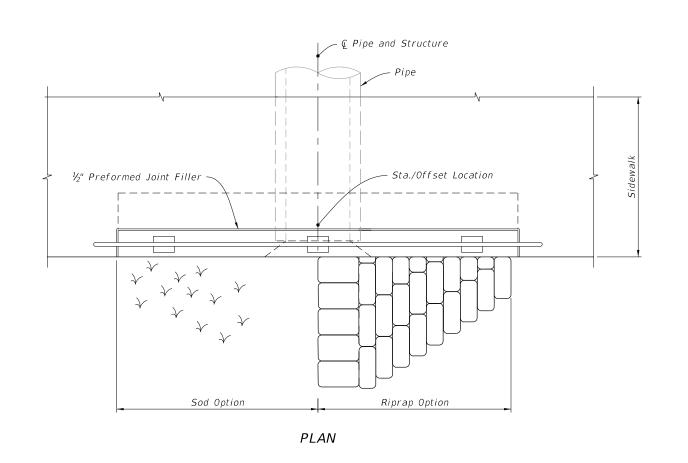

NOTES:

- 1. Grading back of sidewalk as directed in the Plans.
- 2. Concrete quantities shown are for maximum wall heights and for information only.
- 3. Riprap quantities are for informational and estimating purposes only.

TABLE - 1				
Pipe Size Dia. (in)	С	Concrete Class II (CY)	Sand-Cement Riprap (CY)	
15	4'-9"	2.3	1.1	
18	5'-3"	2.6	1.3	
24	6'-3"	3.3	1.8	

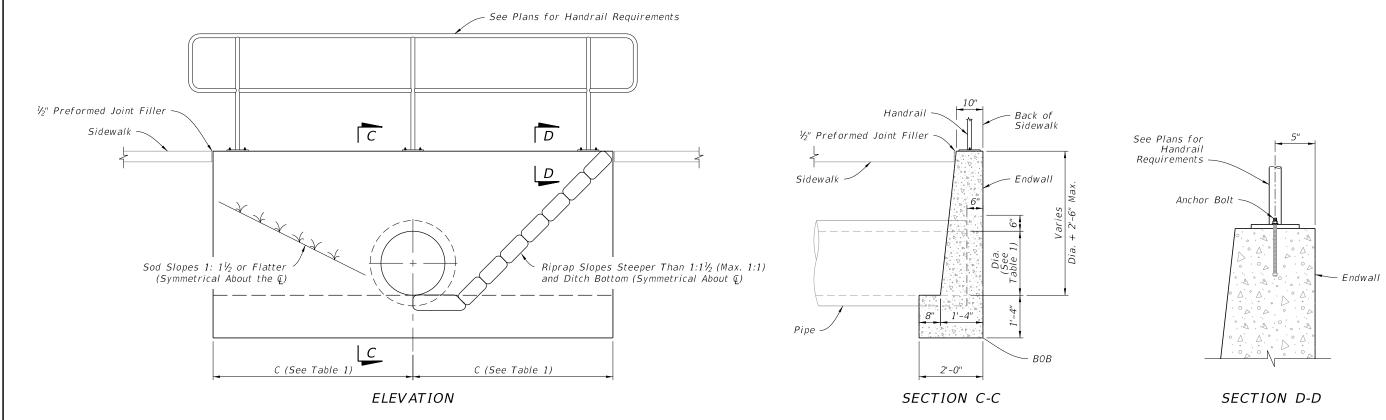

REVISION 11/01/21


DESCRIPTION:

FDOT


FY 2022-23 STANDARD PLANS SPECIAL CONCRETE ENDWALL

NOTES:

- 1. Construct at locations as directed by the Engineer.
- 2. Use either cast iron pipe or PVC rigid conduit, U.L. listed for direct sunlight exposure, Schedule 40.

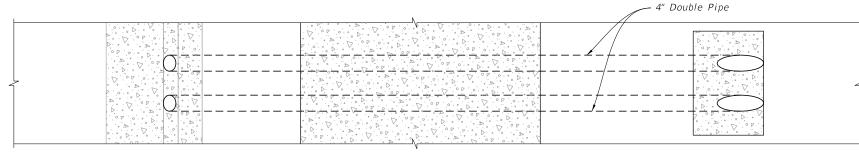


PLAN

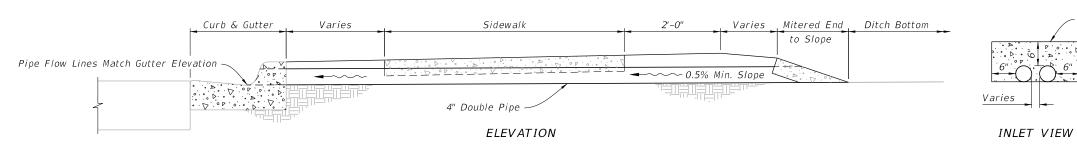

SHALLOW DITCHES =

NOTES:

- 1. Tee will be either concrete or PVC, 15"x15"x12".
- 2. Grate will have diameter of 14¼", 2½" thick, minimum 45 square inches flow area, and be light duty cast iron in accordance Specification 962.

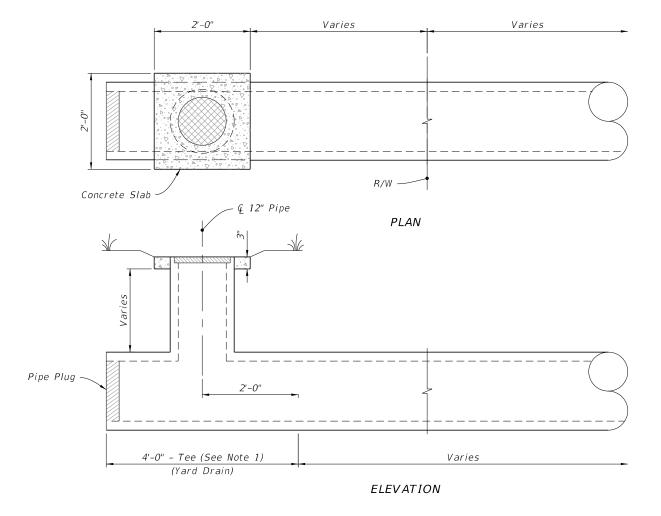

= YARD DRAINS =

SHALLOW DITCHES AND YARD DRAINS

LAST REVISION 11/01/21

DESCRIPTION:

FDOT

- Class II Concrete